802.1x WLAN + VLAN override with Mobility Express (ME) 8.2 and ISE 2.1

Contents

Introduction

Prerequisites

- Requirements
- Components Used

Configure

- Network Diagram
- Configurations
  - Configuration on ME
  - Declare ME on ISE
  - Create a new user on ISE
  - Create the Authentication rule
  - Create the Authorization rule
  - Configuration of end device

Verify

- Authentication process on ME
- Authentication process on ISE

Introduction

This documents describes how to set up a WLAN (Wireless Local Area Network) with Wi-Fi Protected Access 2 (WPA2) Enterprise security with a Mobility Express controller and an external Remote Authentication Dial-In User Service (RADIUS) server. Identity Service Engine (ISE) is used as example of external RADIUS servers.

The Extensible Authentication Protocol (EAP) used in this guide is Protected Extensible Authentication Protocol (PEAP). Besides that the client is assigned to an specific VLAN (other than the one assigned to the WLAN ny default).

Prerequisites

Requirements

Cisco recommends that you have knowledge of these topics:

- 802.1x
- PEAP
- Certification Authority (CA)
- Certificates

Components Used

The information in this document is based on these software and hardware versions:

ME v8.2


ISE v2.1

Windows 10 Laptop

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Configure

Network Diagram

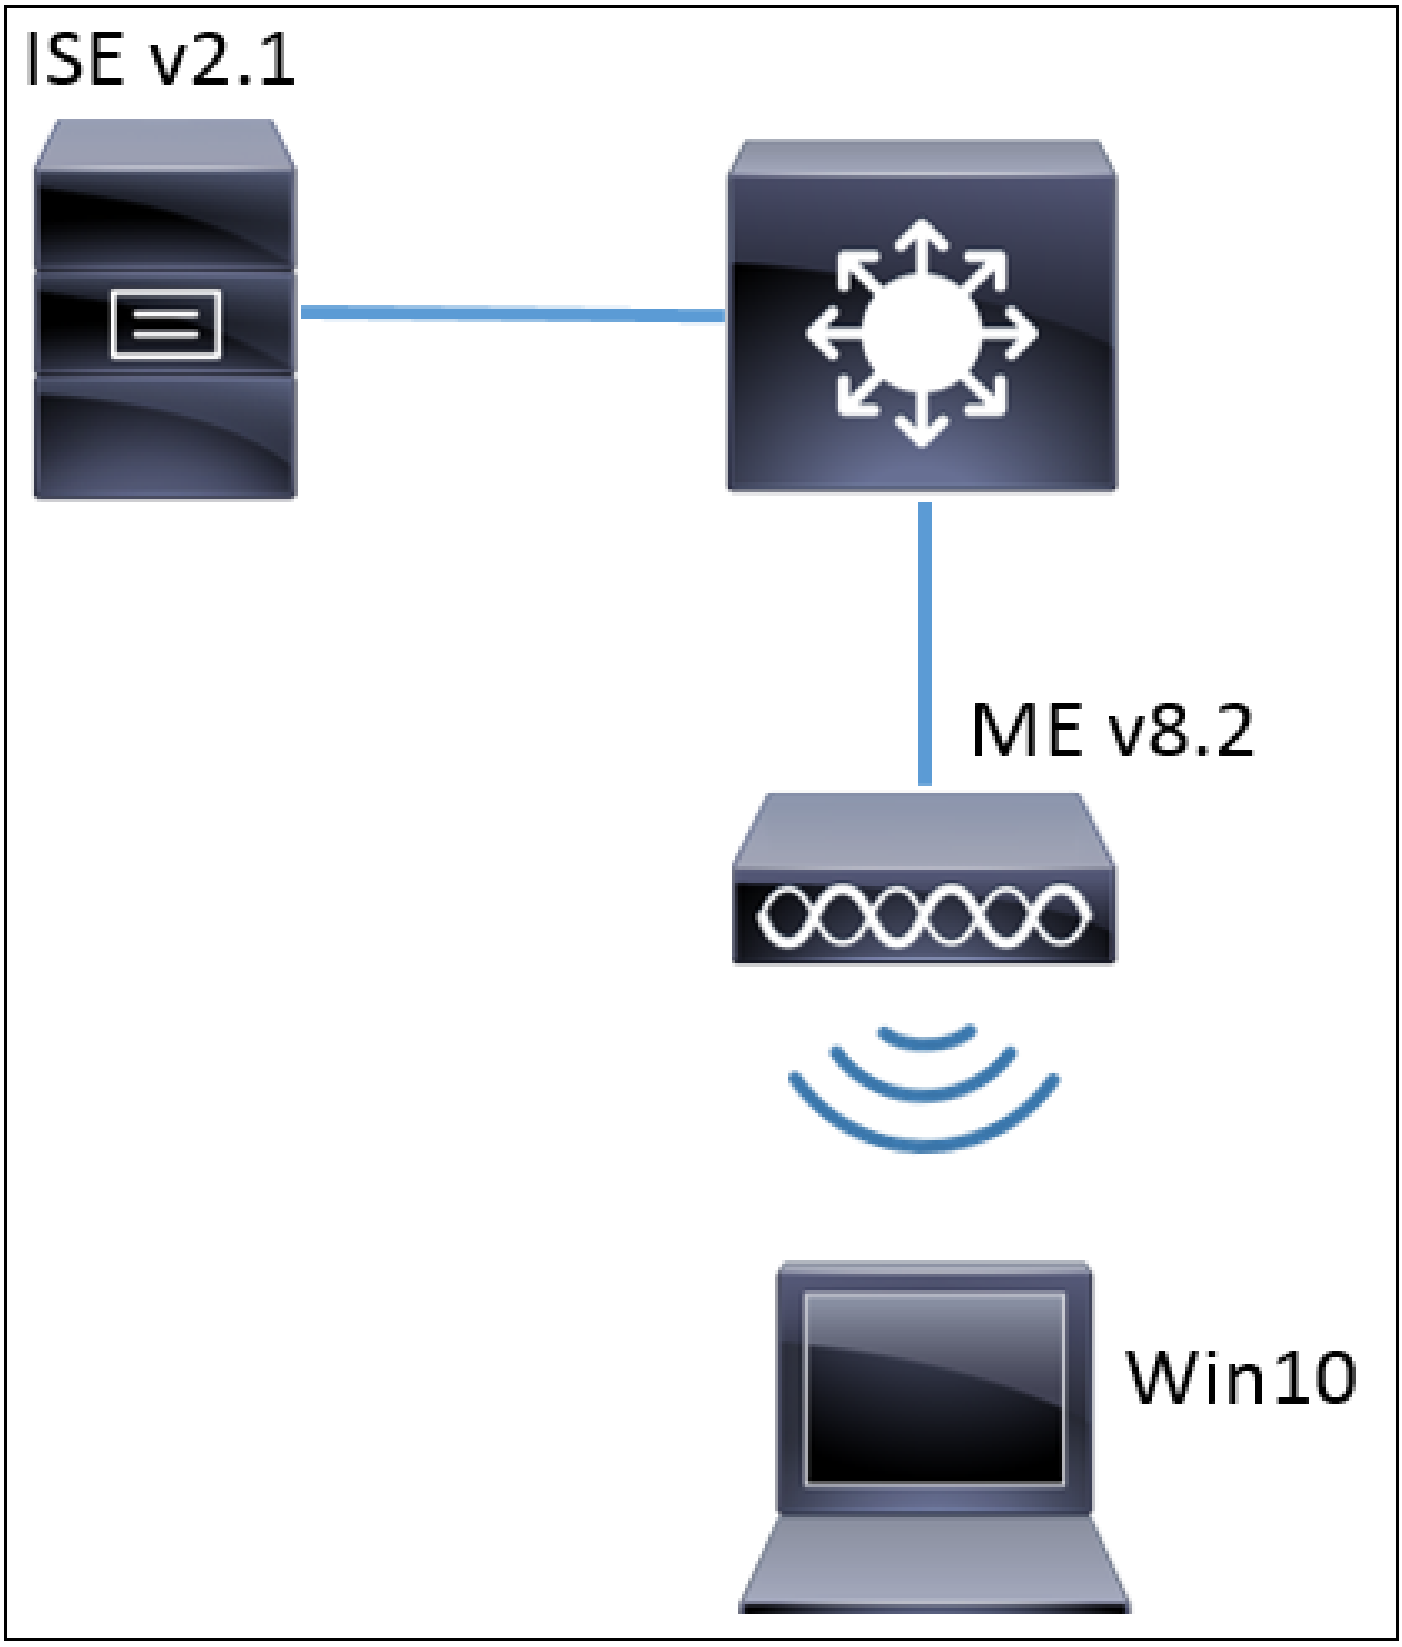

Configurations

The general steps are:


1. Create the Service Set Identifier (SSID) in the ME and declare RADIUS server (ISE in this example) on ME
2. Declare ME on RADIUS server (ISE)
3. Create the authentication rule on ISE

4. Create the authorization rule on ISE
5. Configure the endpoint


Configuration on ME

In order to allow communication between RADIUS server and ME it is needed to register RADIUS server on ME and vice versa. This step shows how to register RADIUS server on ME.

Step 1. Open the GUI of the ME and navigate to **Wireless Settings > WLANs > Add new WLAN.**

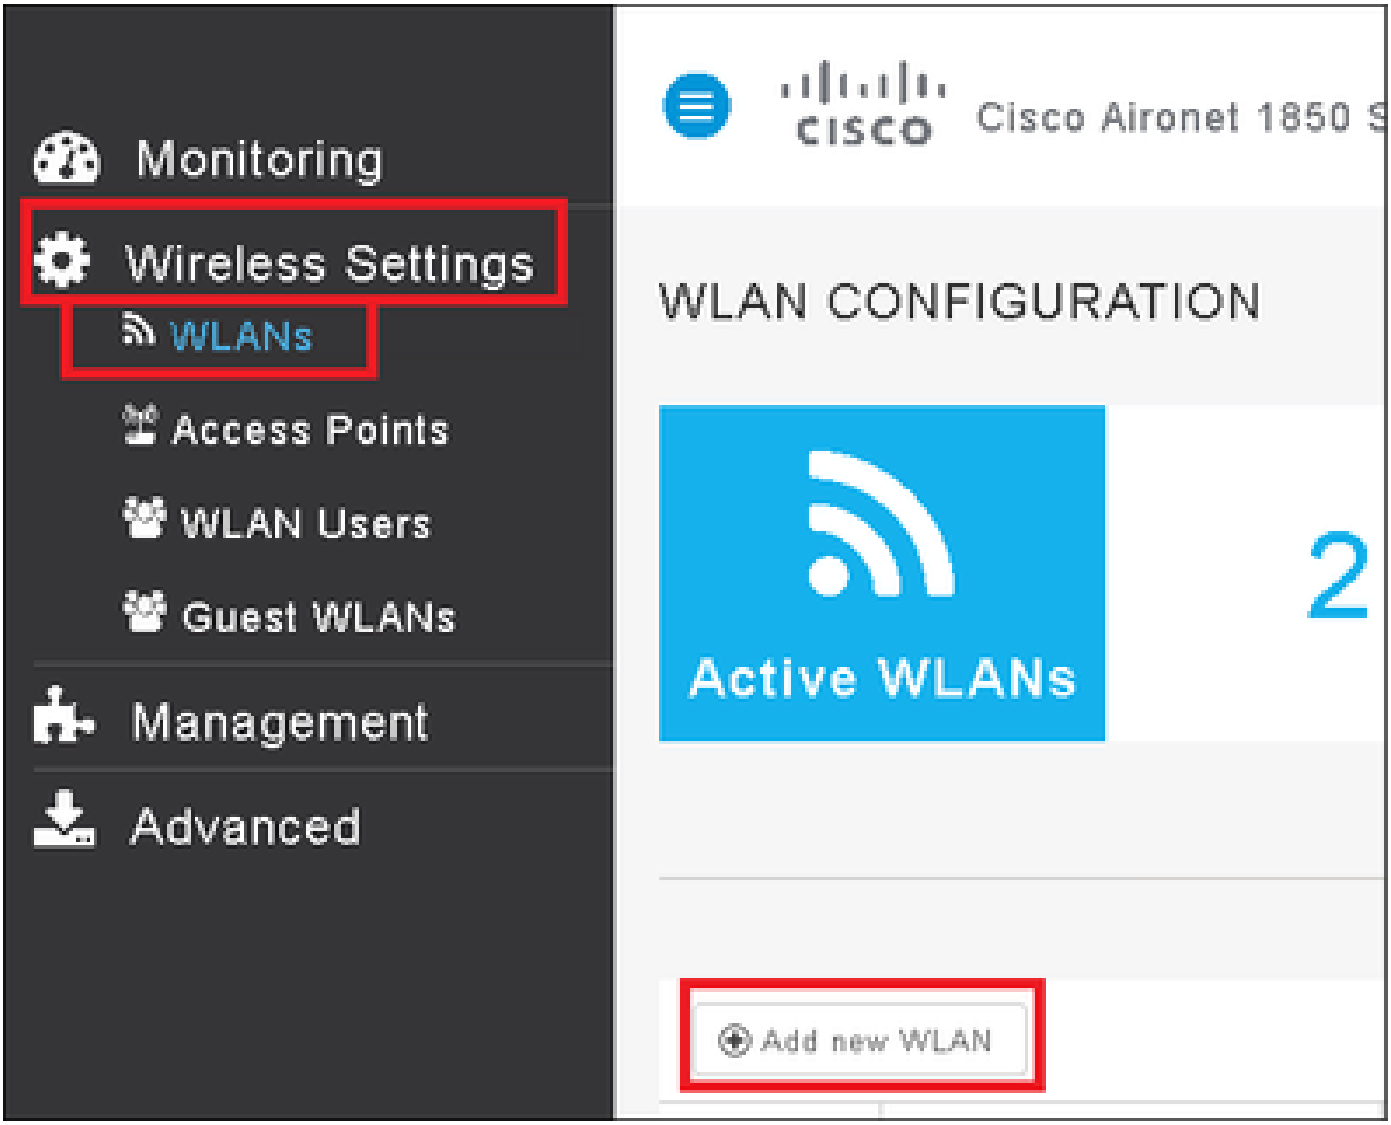



Step 2. Select a name for the WLAN.

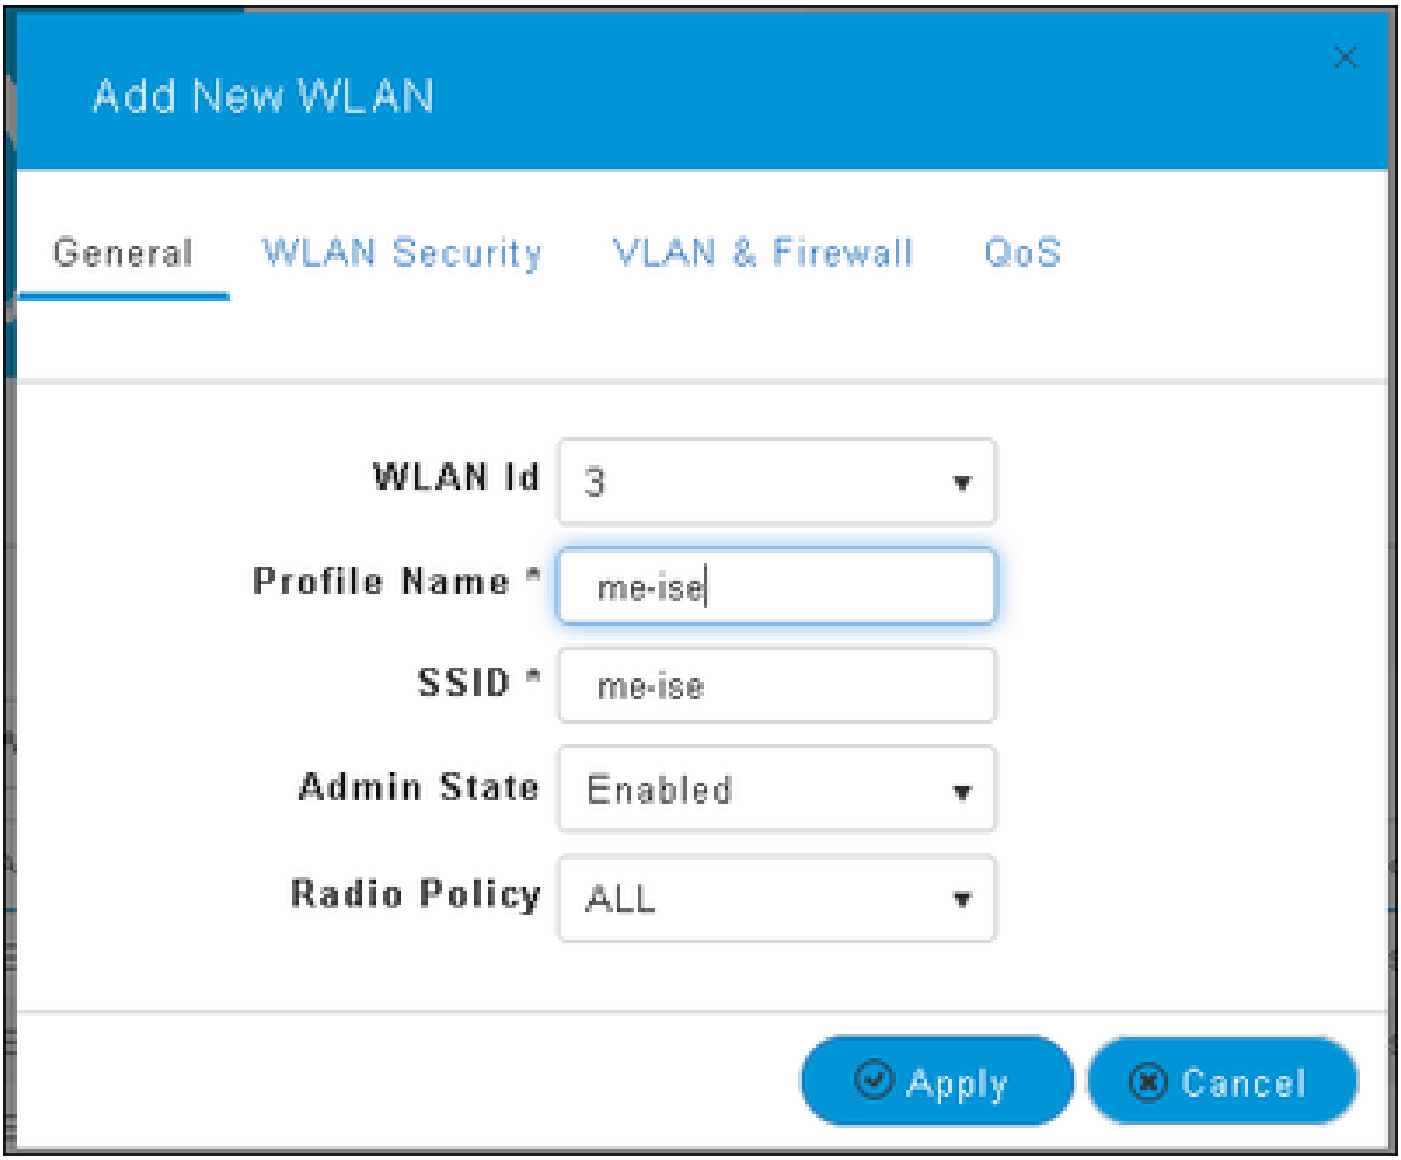

Step 3. Specify Security configuration under **WLAN Security** tab.

Choose **WPA2 Enterprise**, for Authentication server choose **External RADIUS**. Click the edit option to add the RADIUS's ip address and pick a **Shared Secret** key.

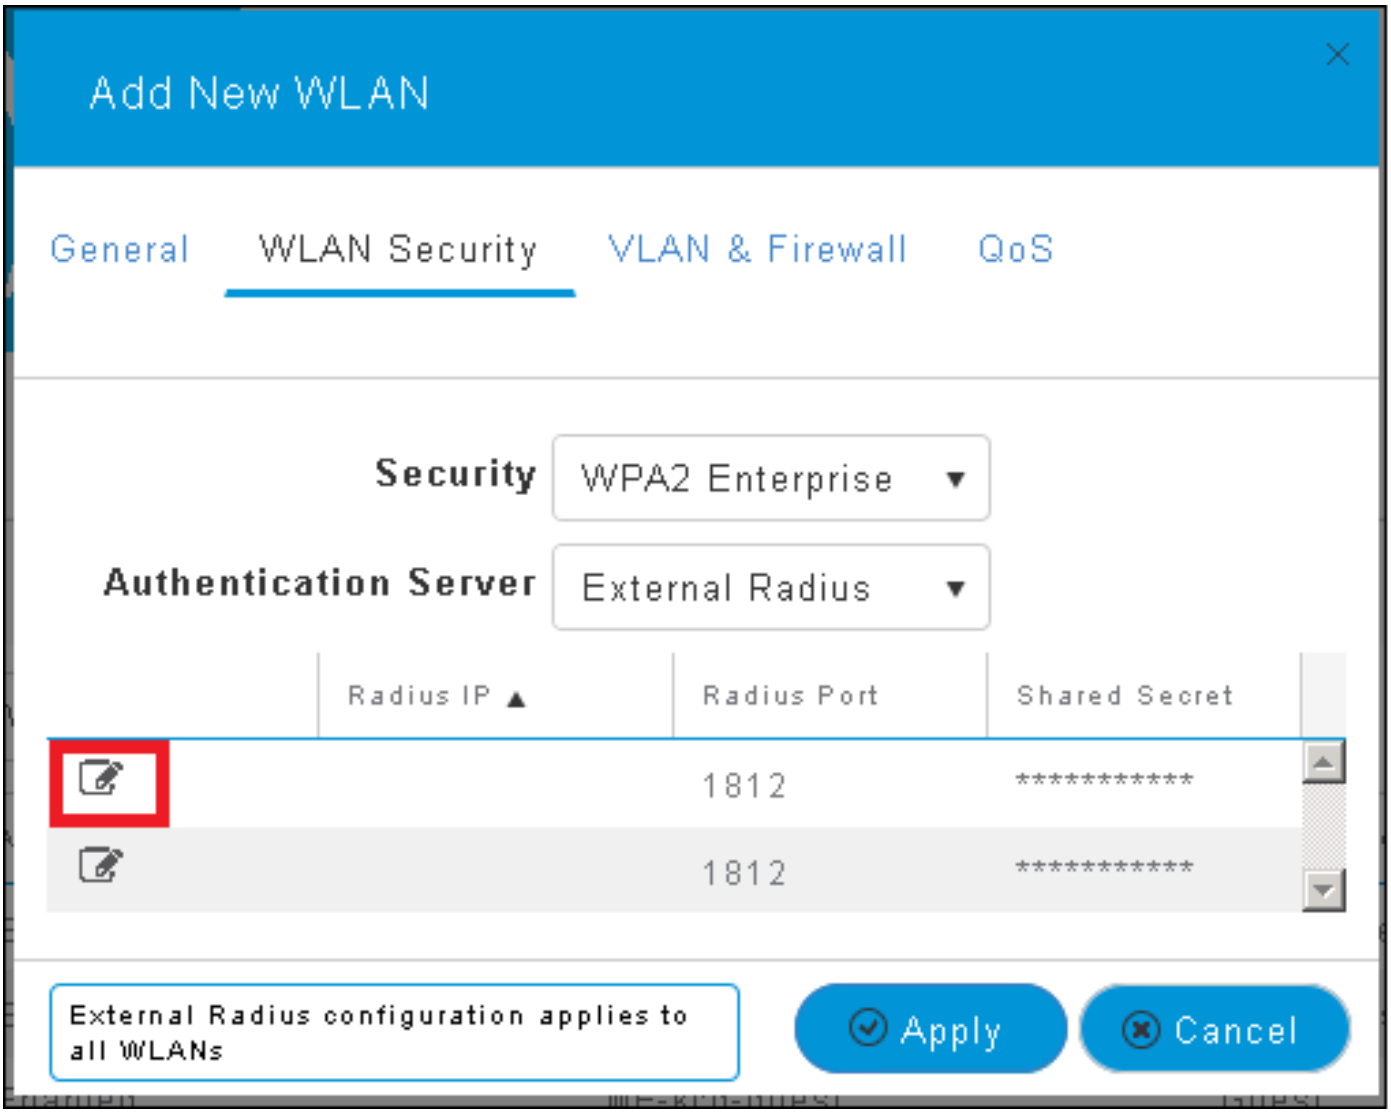
Add New WLAN
General
WLAN Security
VLAN & Firewall
QoS
Security
WPA2 Enterprise
Authentication Server
External Radius
Radius IP
Radius Port
Shared Secret
1812
****
1812
****
External Radius configuration applies to all WLANs
Apply
Cancel

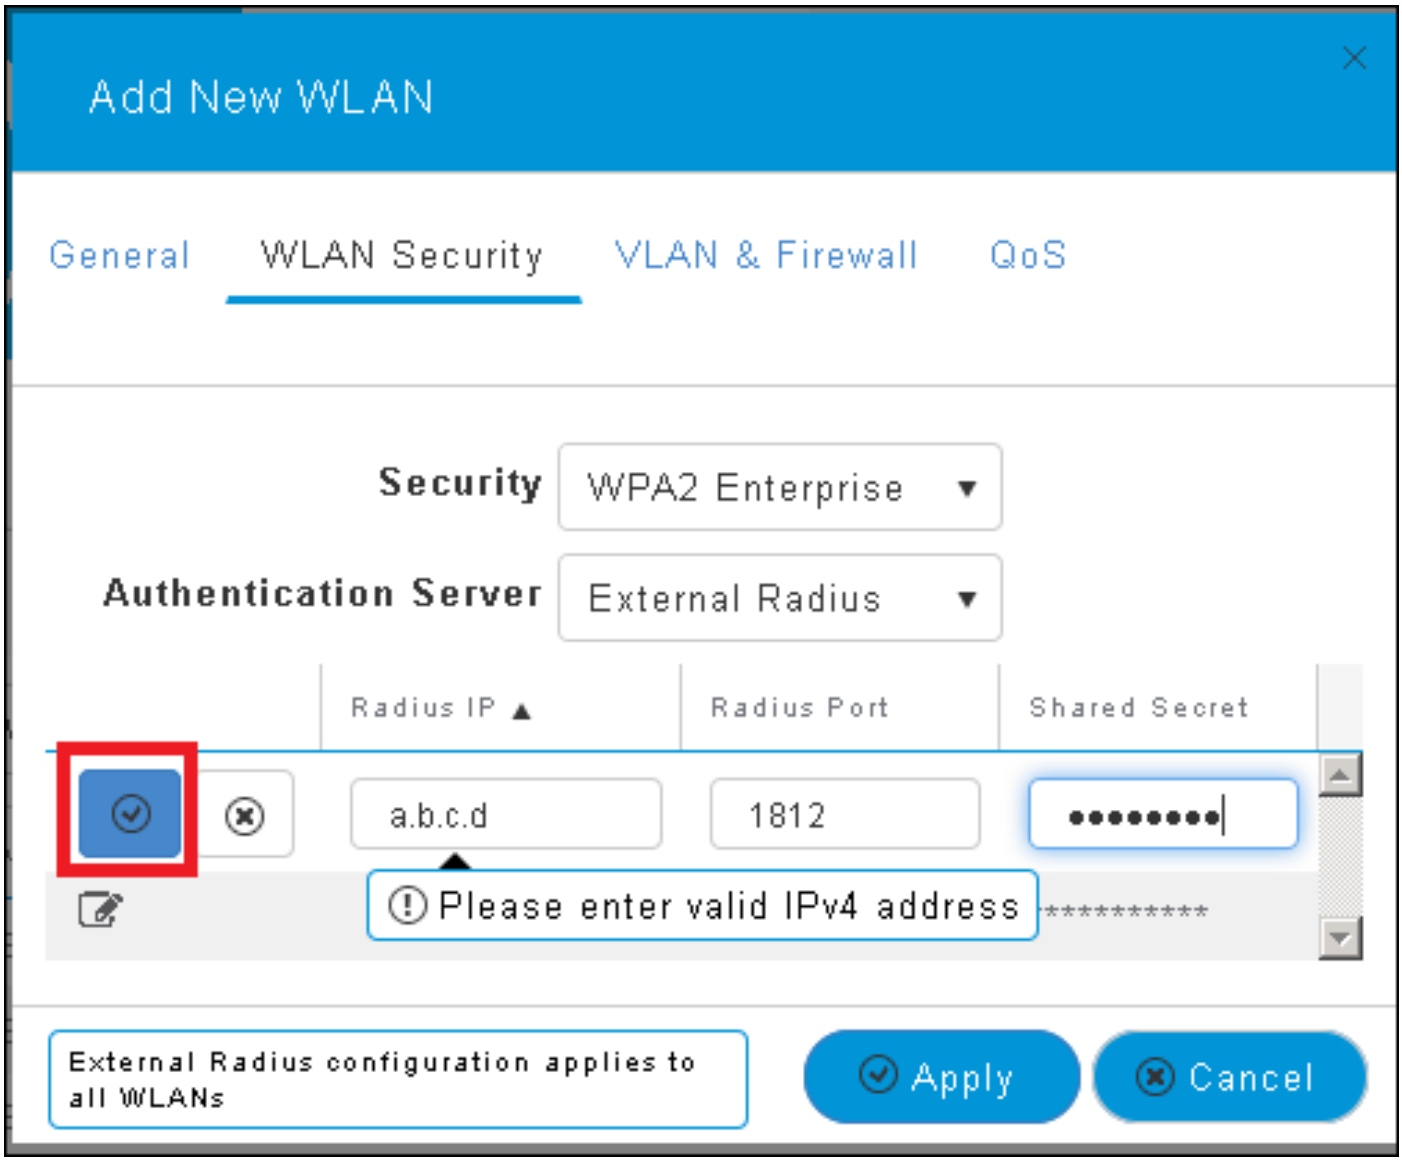


<a.b.c.d> corresponds to the RADIUS server.

Step 4. Assign a VLAN to the SSID.


If the SSID needs to be assigned to the AP's VLAN this step can be skipped.

In order to assign the users for this SSID to a specific VLAN (other than AP's VLAN), enable **Use VLAN Tagging** and assign the desired **VLAN ID**.

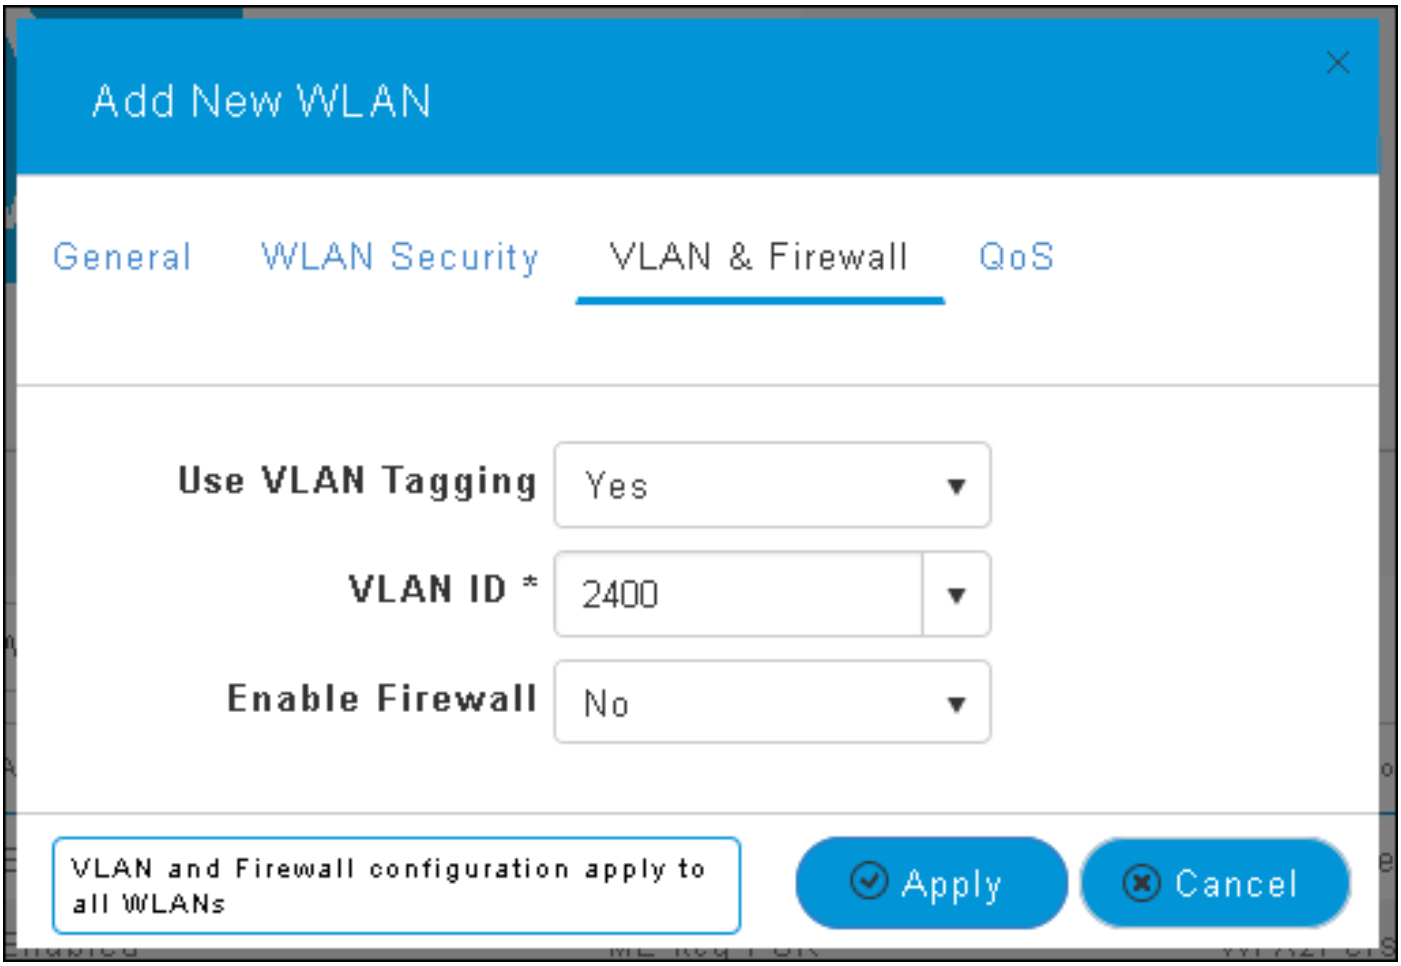

Note: If VLAN Tagging is used, be sure that the switchport where the Access Point is connected to, is configured as trunk port and the AP VLAN is configured as native.

Step 5. Click **Apply** to finish the configuration.

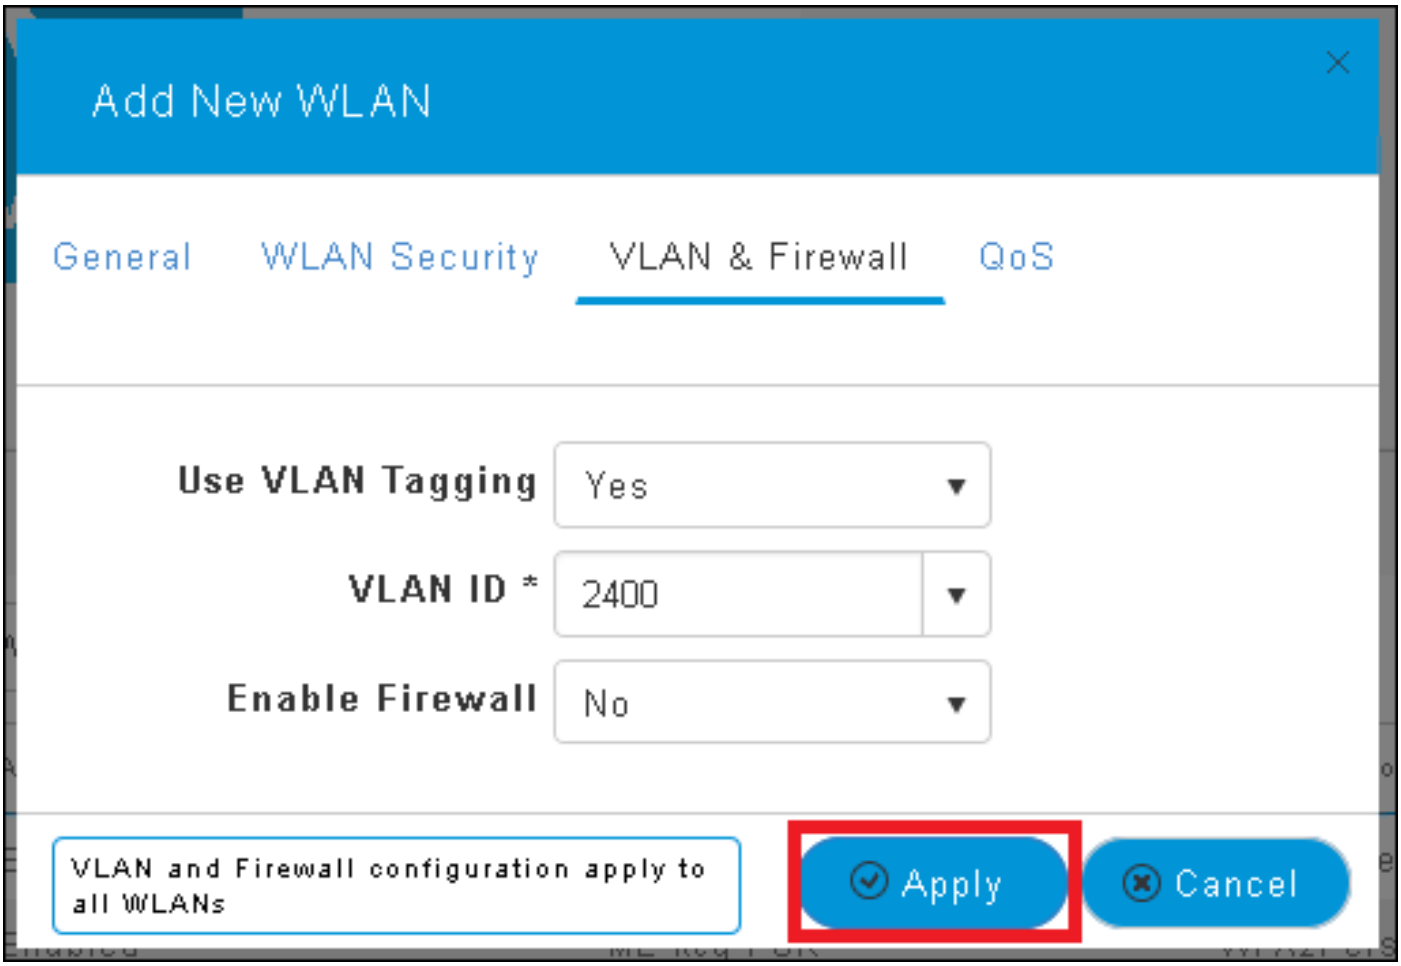


Step 6. Optional, configure the WLAN to accept the VLAN override.

Enable AAA override on the WLAN and add the needed VLANs. To do so you will nee to open a CLI session to the ME management interface and issue these commands:

```
>config wlan disable <wlan-id>
>config wlan aaa-override enable <wlan-id>
>config wlan enable <wlan-id>
>config flexconnect group default-flexgroup vlan add <vlan-id>
```

Declare ME on ISE


Step 1. Open ISE console and navigate to **Administration > Network Resources > Network Devices > Add.**

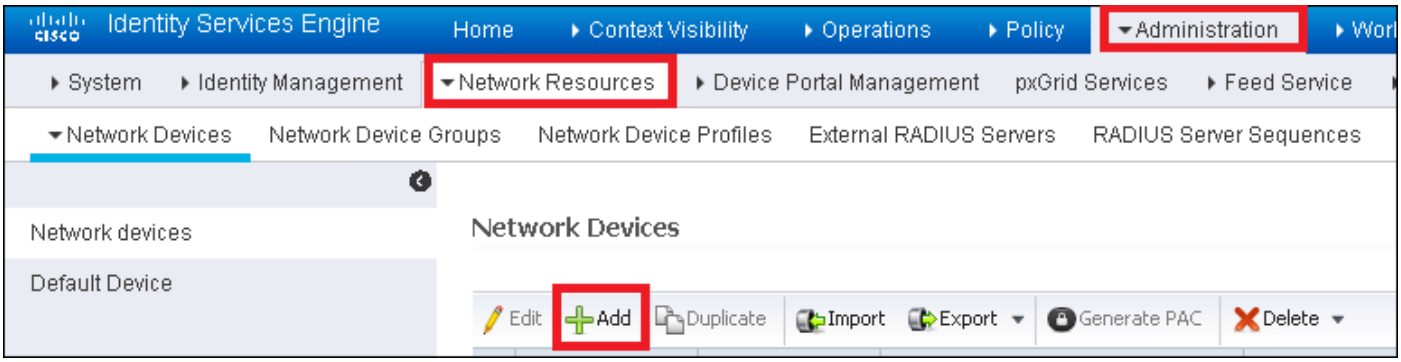

Step 2. Enter the information.

Optionally it can be specified a Model name, software version, description and assign Network Device groups based on device types, location or WLCs.

a.b.c.d correspond to the ME's IP address.

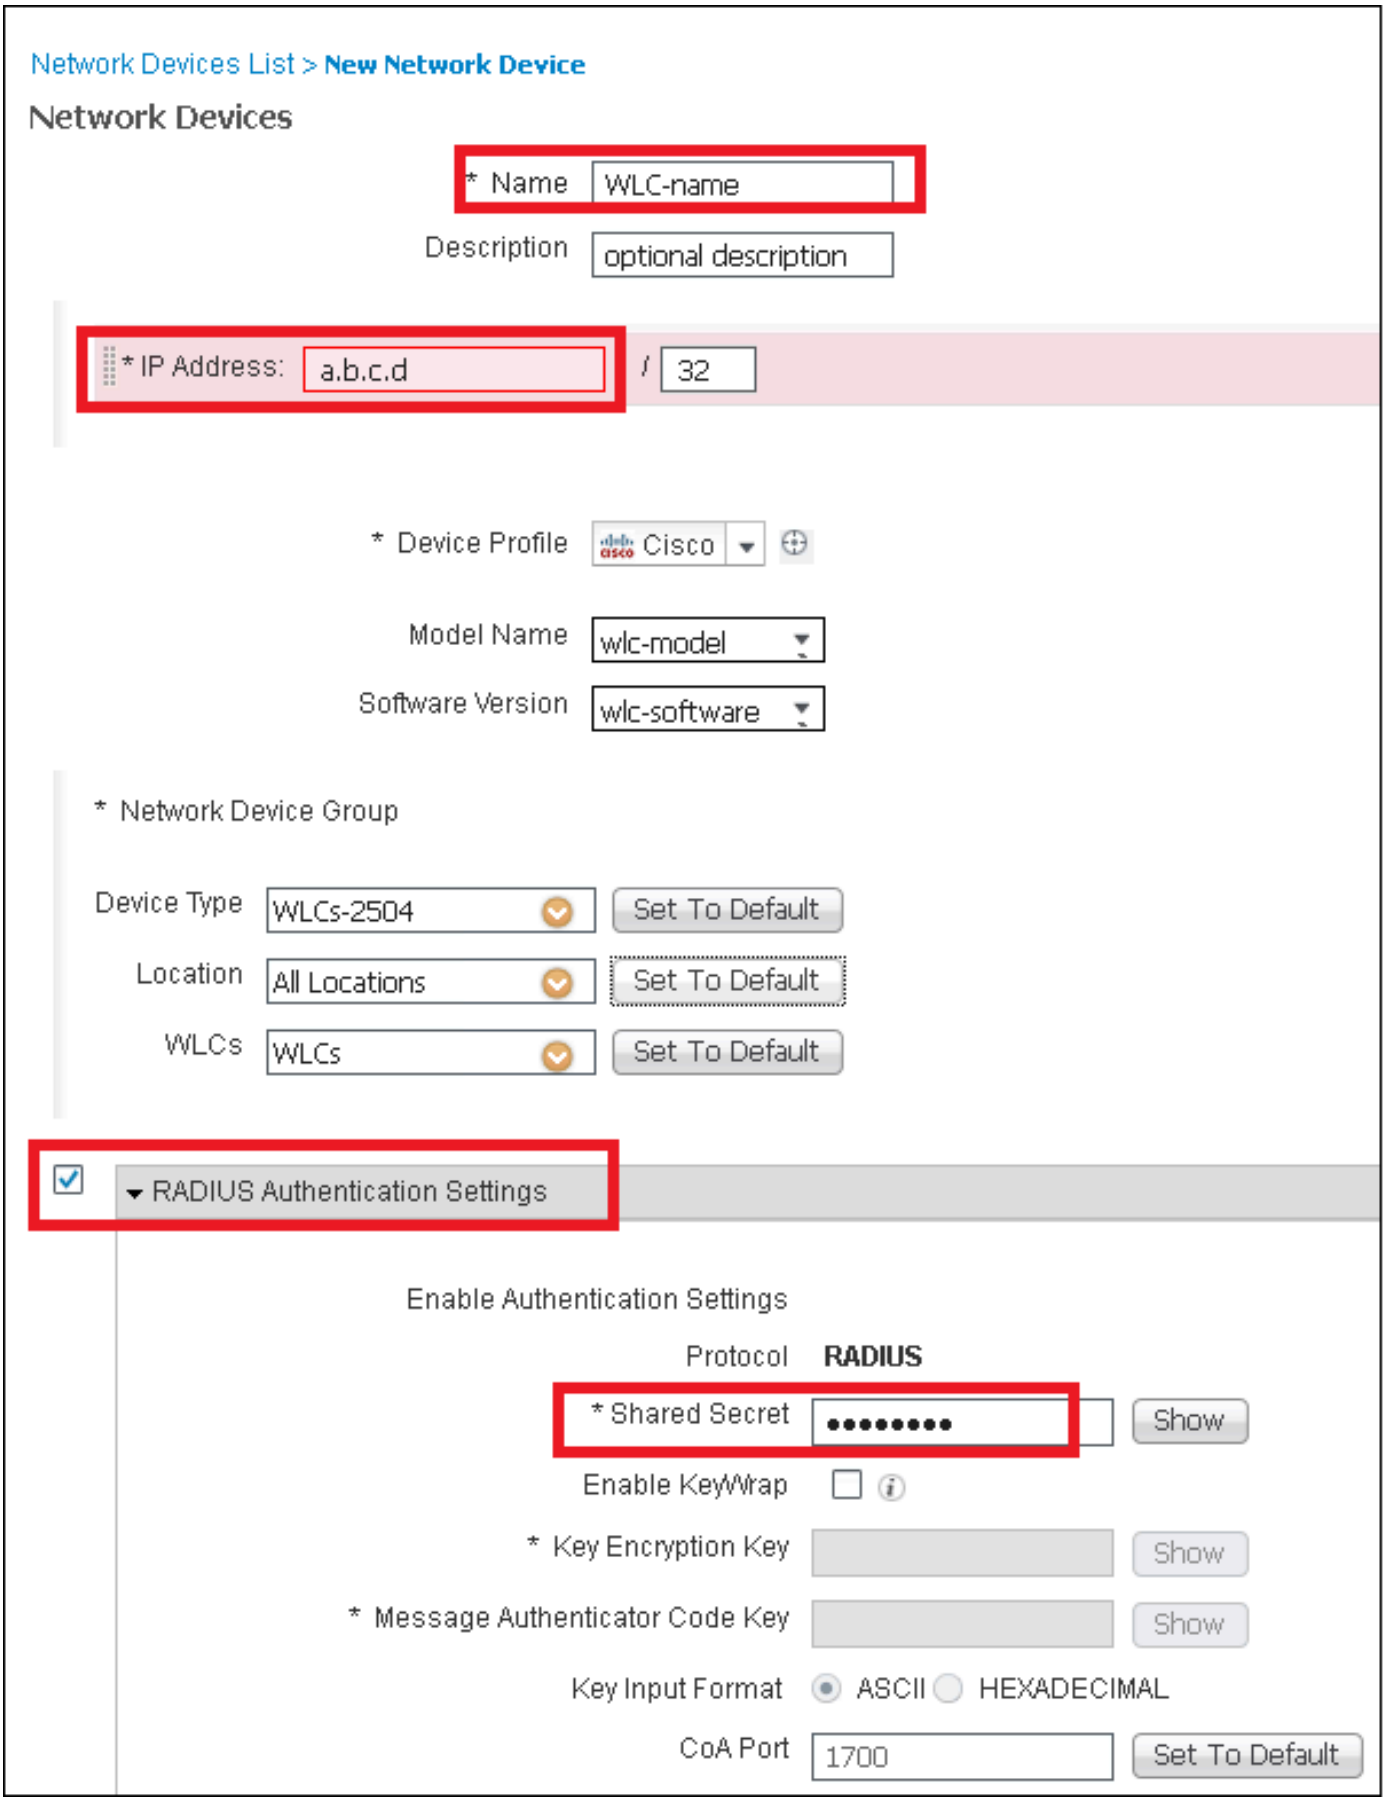


For more information about Network Device Groups review this link:

[ISE - Network Device Groups]


Create a new user on ISE


Step 1. Navigate to **Administration > Identity Management > Identities > Users > Add.**

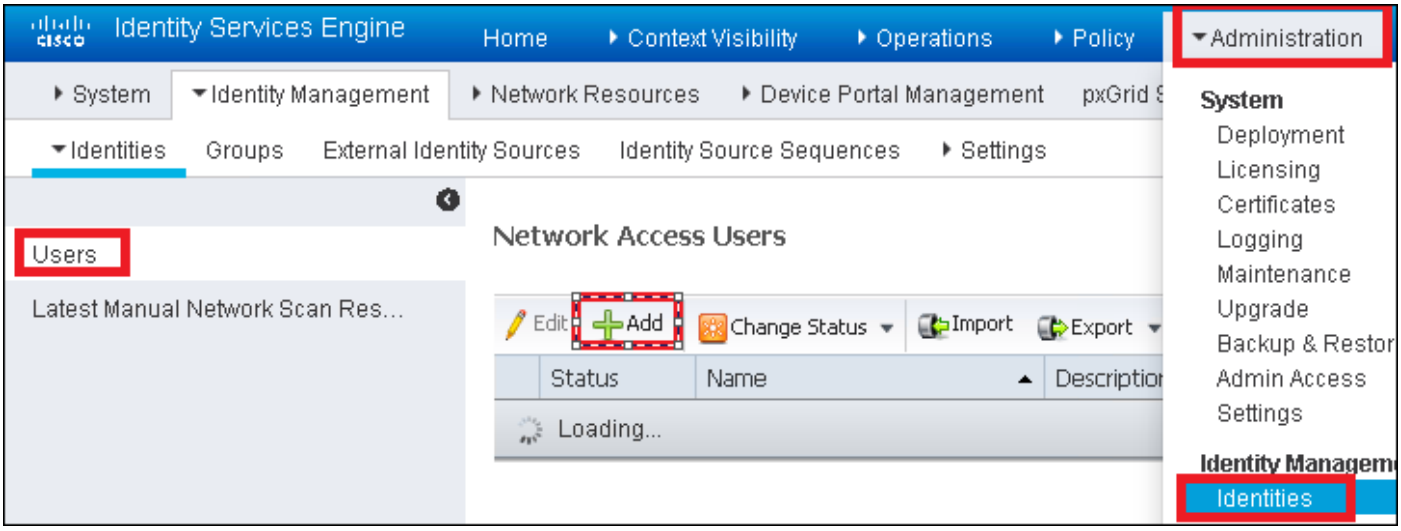

Step 2. Enter the information.

In this example this user belongs to a group called ALL_ACCOUNTS but it can be adjusted as needed.

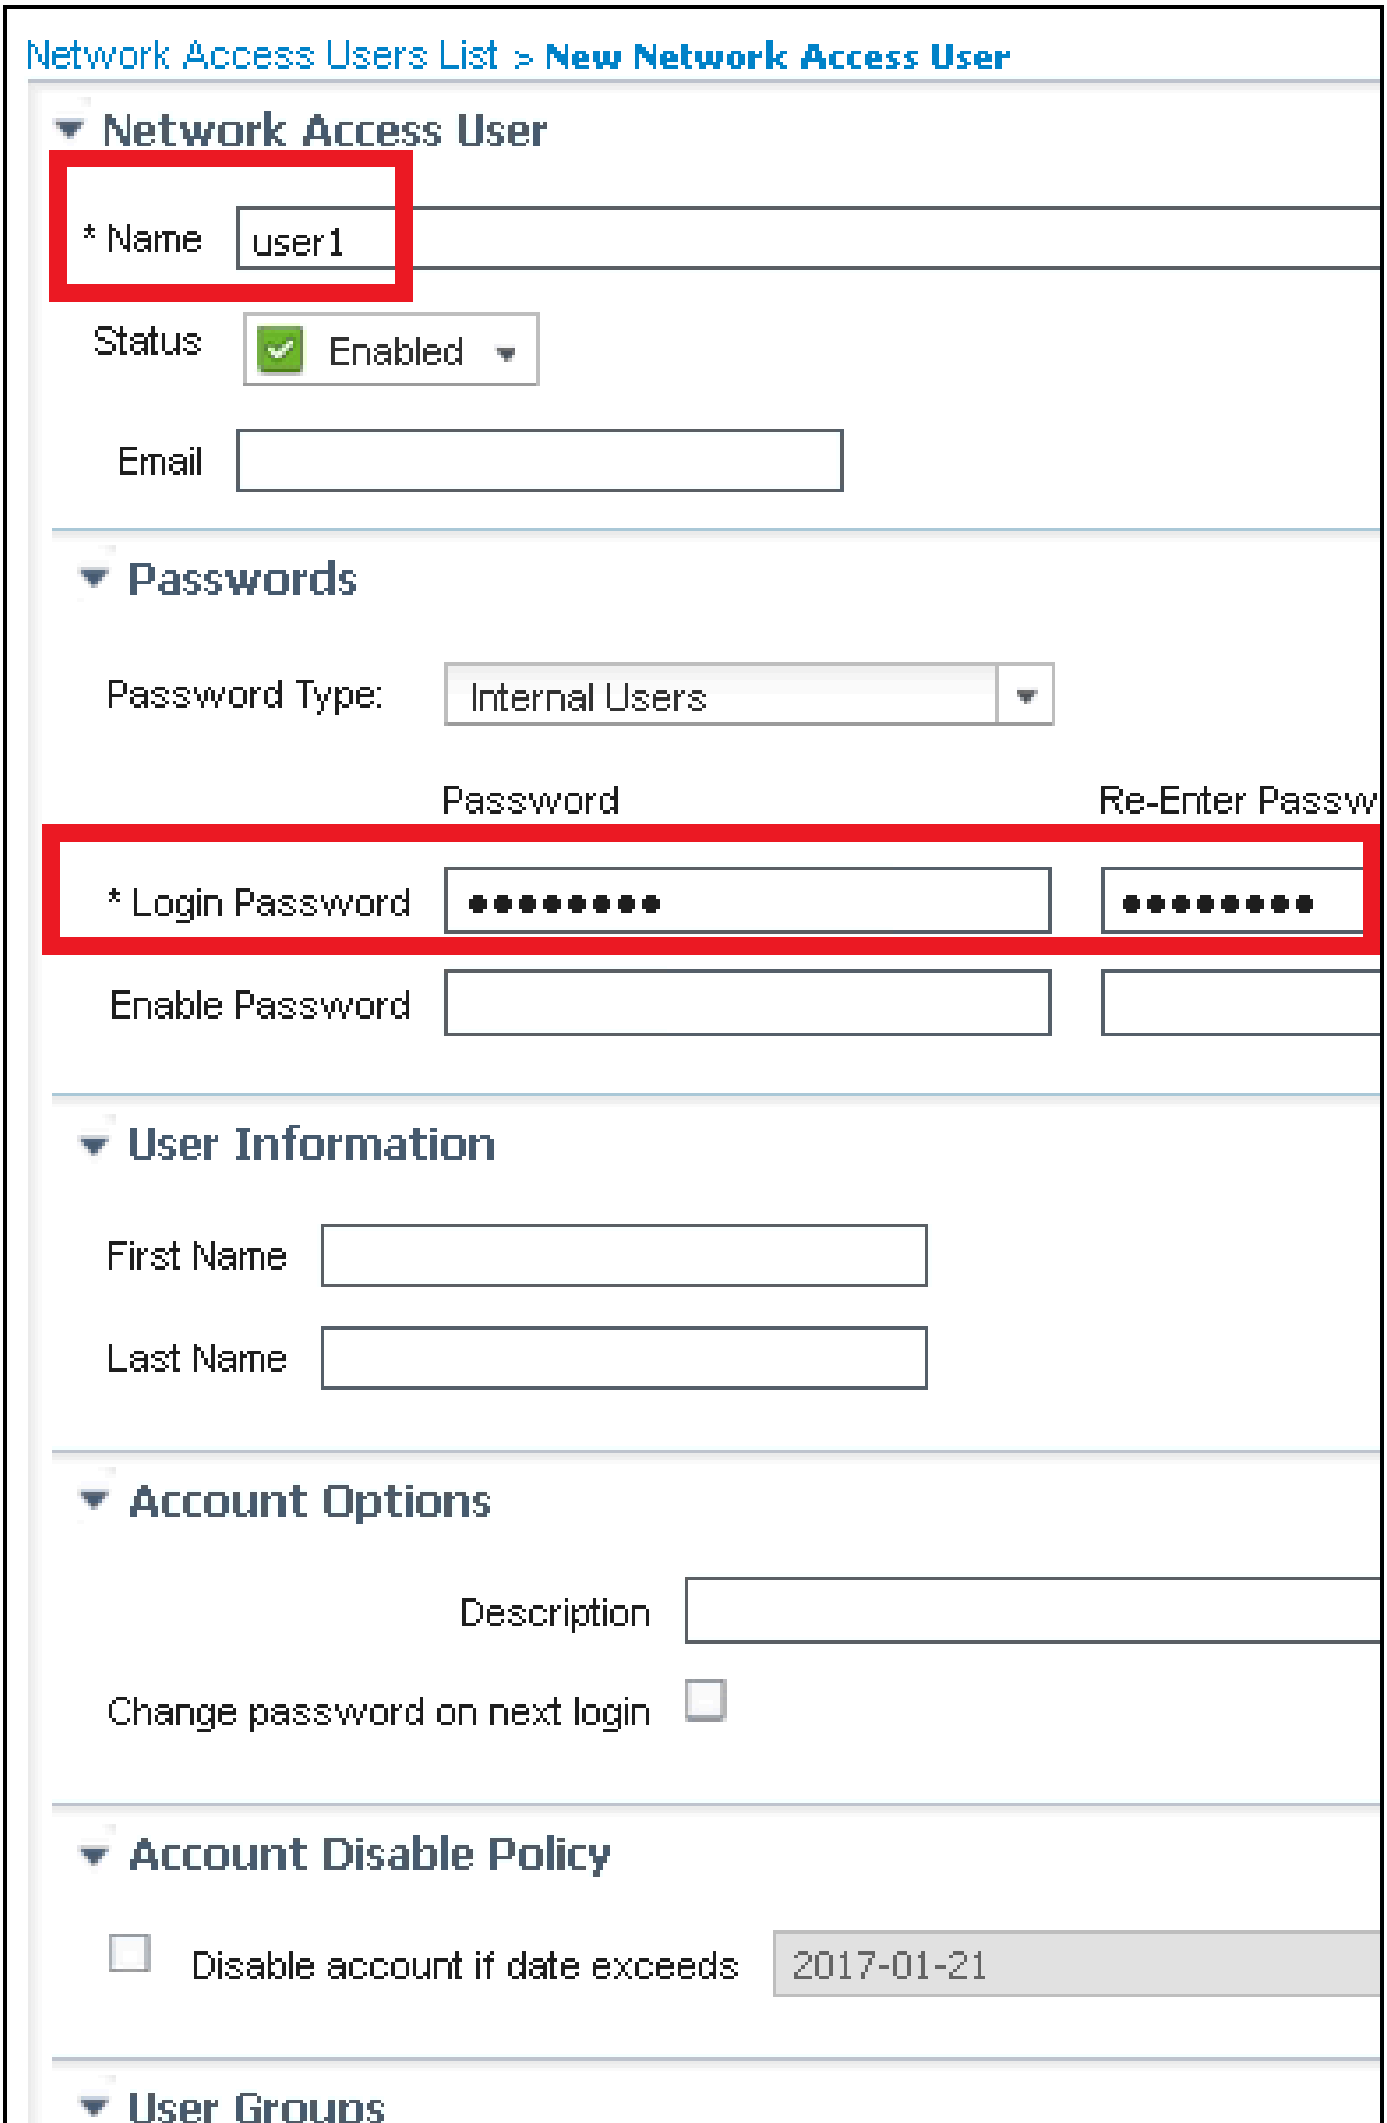
Network Access Users List > New Network Access User
Network Access User
* Name
user1
Status
Enabled
Email
Passwords
Password Type:
Internal Users
Password
Re-Enter Passw
* Login Password
Enable Password
User Information
First Name
Last Name
Account Options
Description
Change password on next login
Account Disable Policy
Disable account if date exceeds
2017-01-21
User Groups

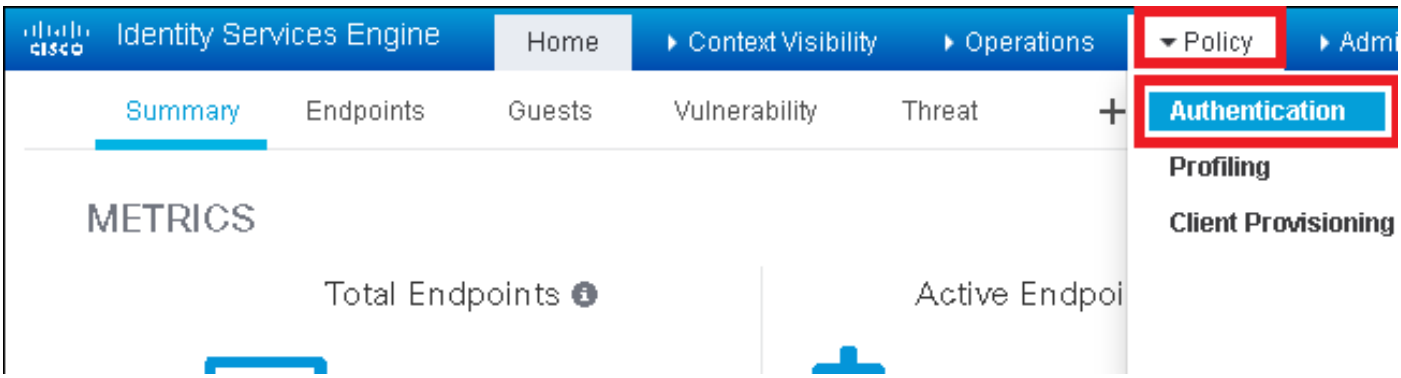


Step 2. Insert a new authentication rule.

To do so navigate to **Policy > Authentication > Insert new row above/below.**




Step 3. Enter the needed information


This authentication rule example allows all the protocols listed under the **Default Network Access** list, this applies to the authentication request for Wireless 802.1x clients and with Called-Station-ID and ends with *ise-ssid*.

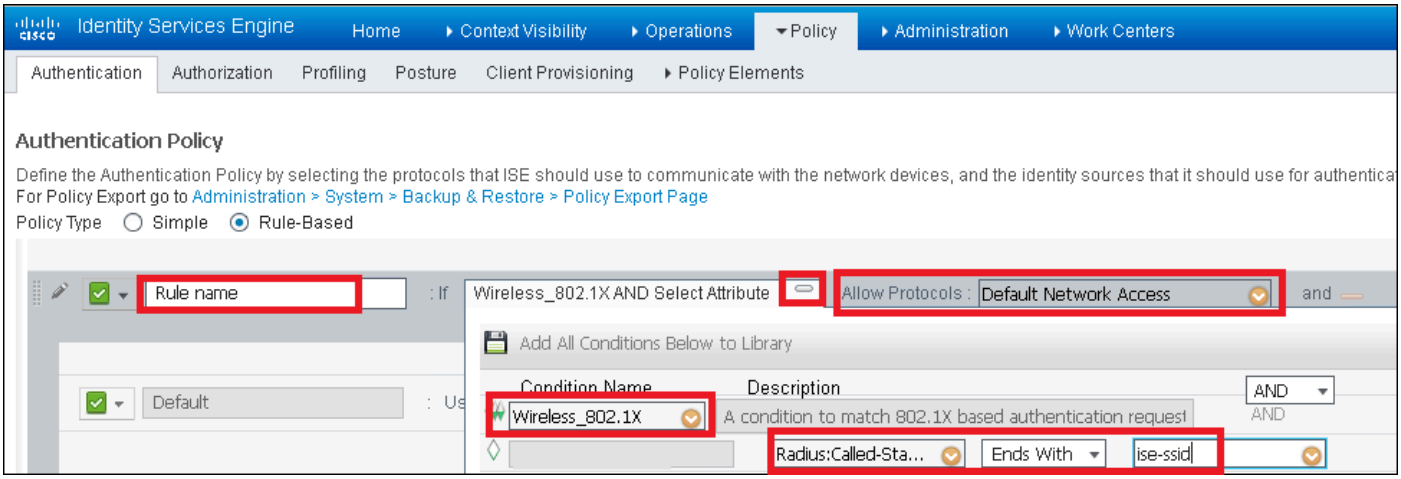

Also, choose the Identity source for the clients that matches this authentication rule, in this example it is used *Internal users*

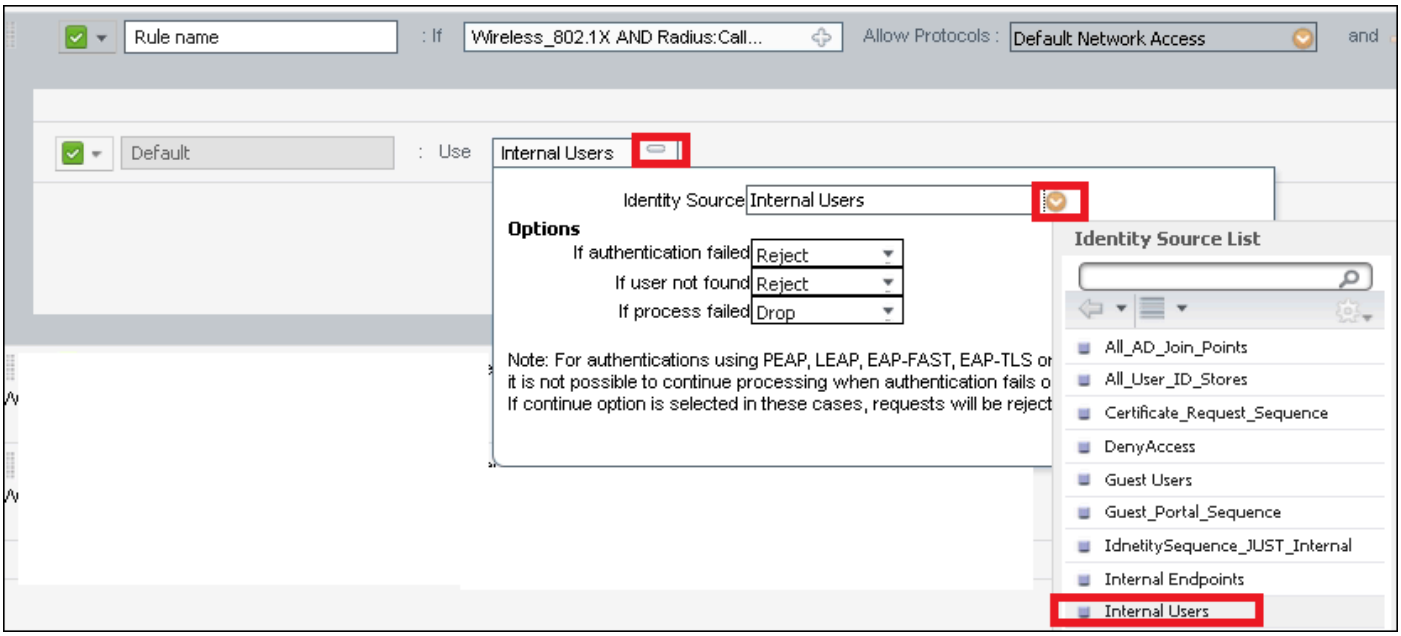

Once It is finished click **Done** and **Save**

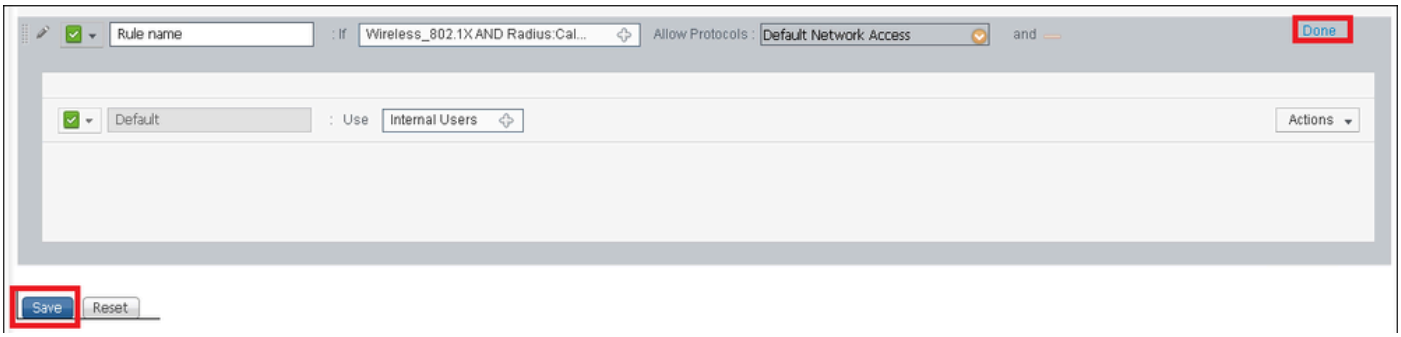

For more information about Allow Protocols Policies consult this link:

[Allowed Protocols Service]


For more information about Identity sources consult this link:

[Create a User Identity Group]


Create the Authorization rule

The authorization rule is the one in charge to determine if the client is allowed to join the network or not

Step 1. Navigate to **Policy > Authorization.**

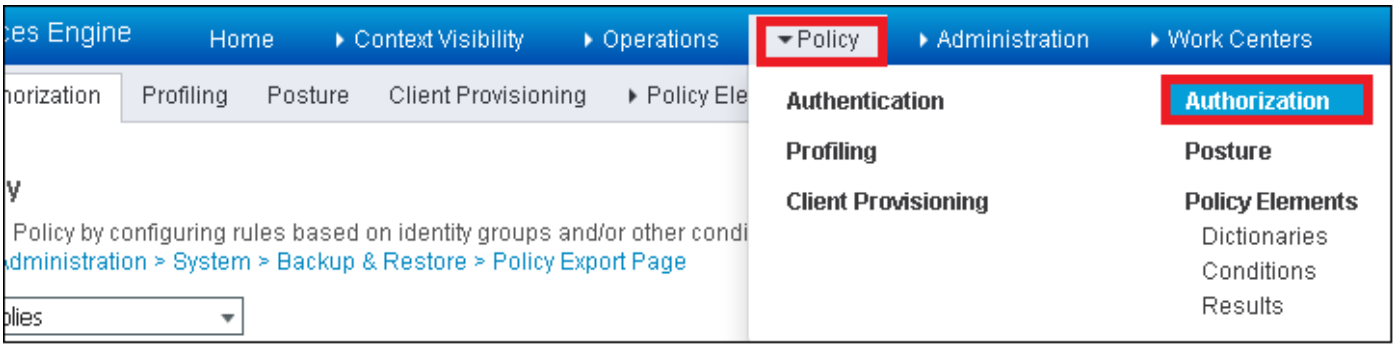


Step 2. Insert a new rule. Navigate to **Policy > Authorization > Insert New Rule Above/Below.**

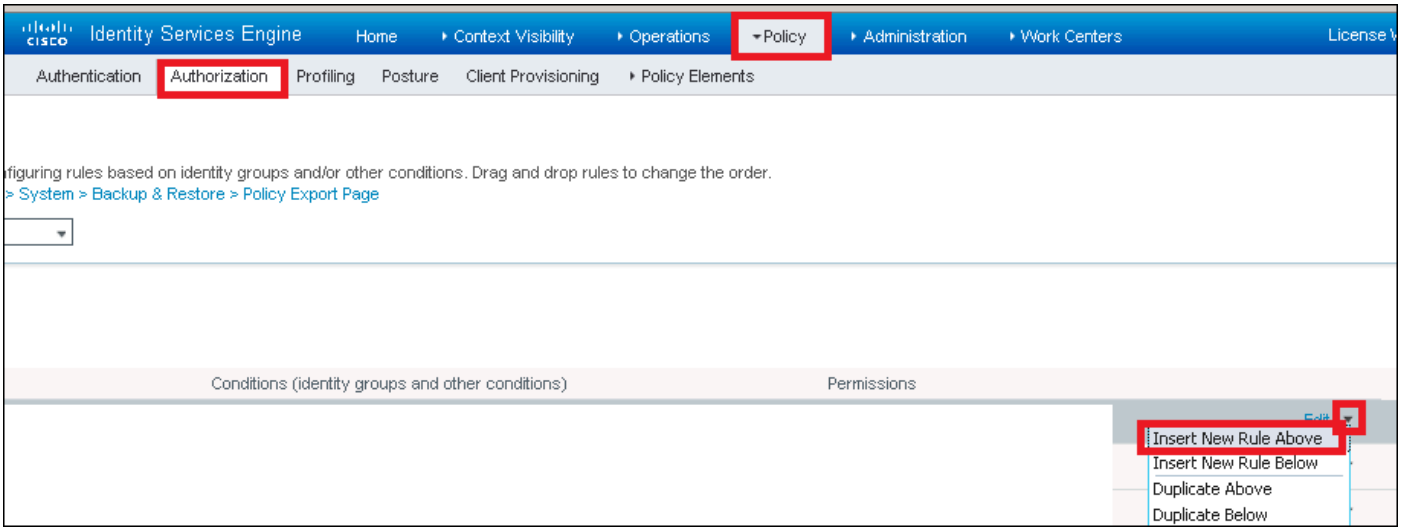


Step 3. Enter the information.


First choose a name for the rule and the Identity groups where the user is stored. In this example the user is stored in group *ALL_ACCOUNTS.*

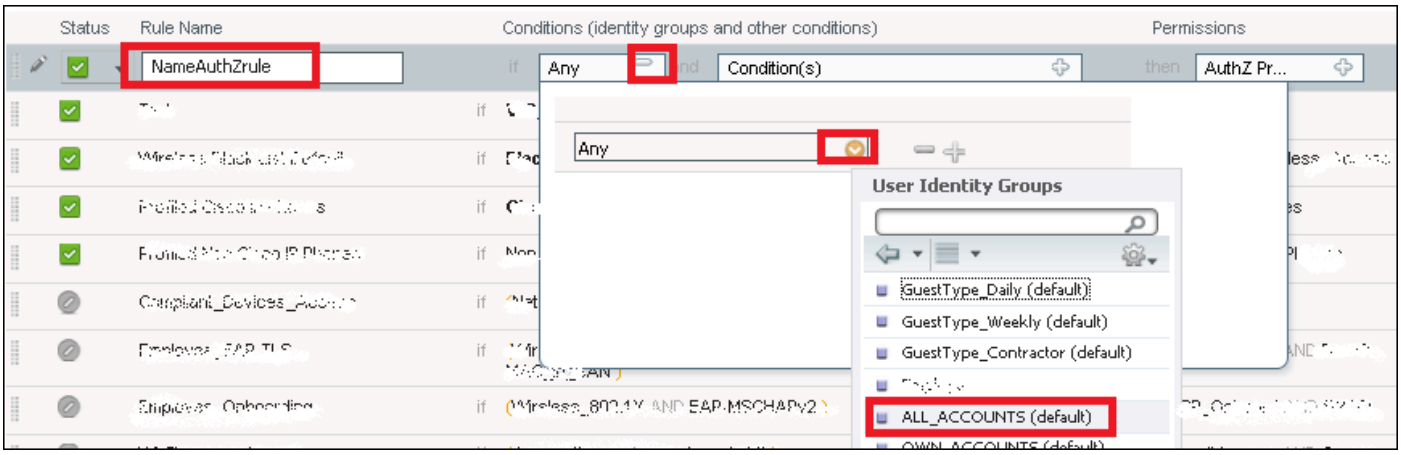


After that choose other conditions that make the authorization process to fall into this rule. In this example the authorization process hits this rule if it uses 802.1x Wireless and it is called station ID ends with *ise-ssid.*

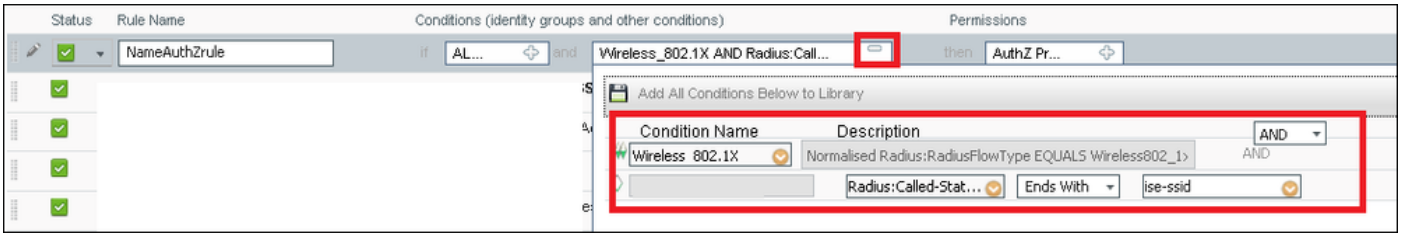


Finally choose the Authorization profile that allows the clients to join the network, click **Done** and **Save.**

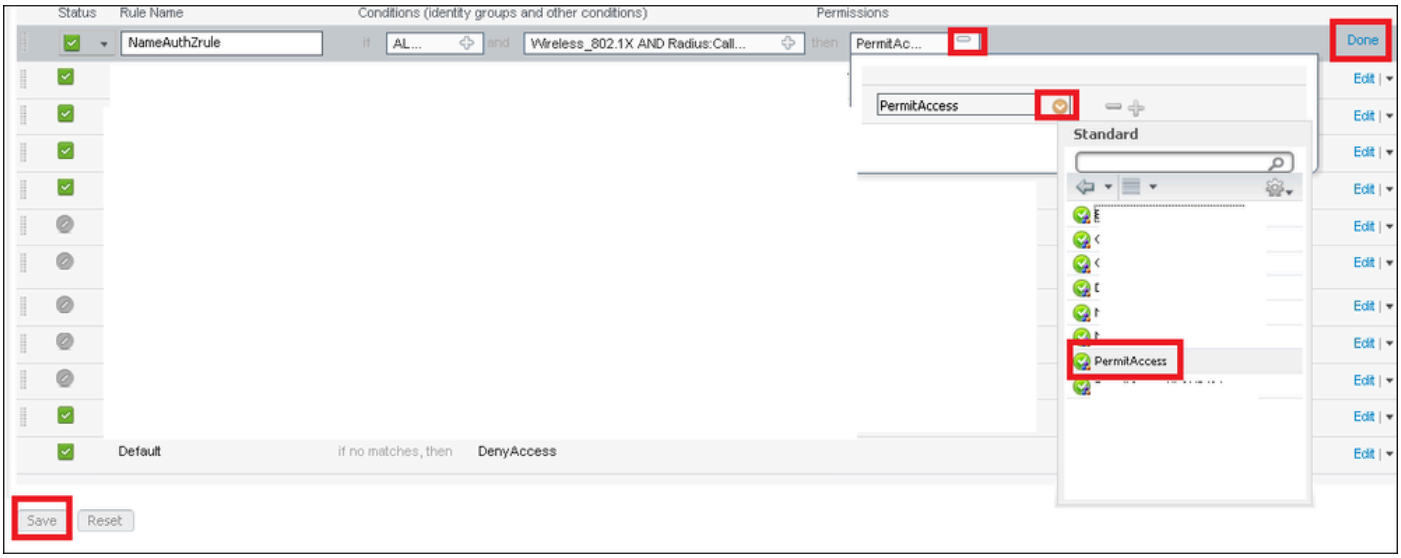

Optionally, create a new authorization profile that will assign the wireless client to a different VLAN:

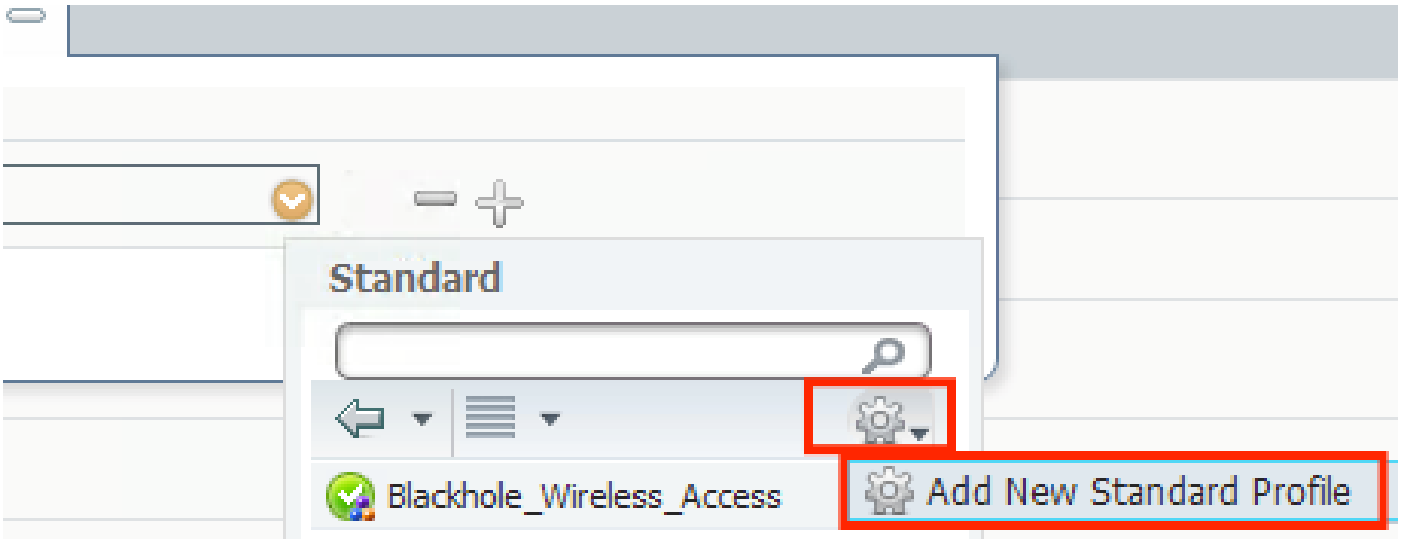

Enter the information:

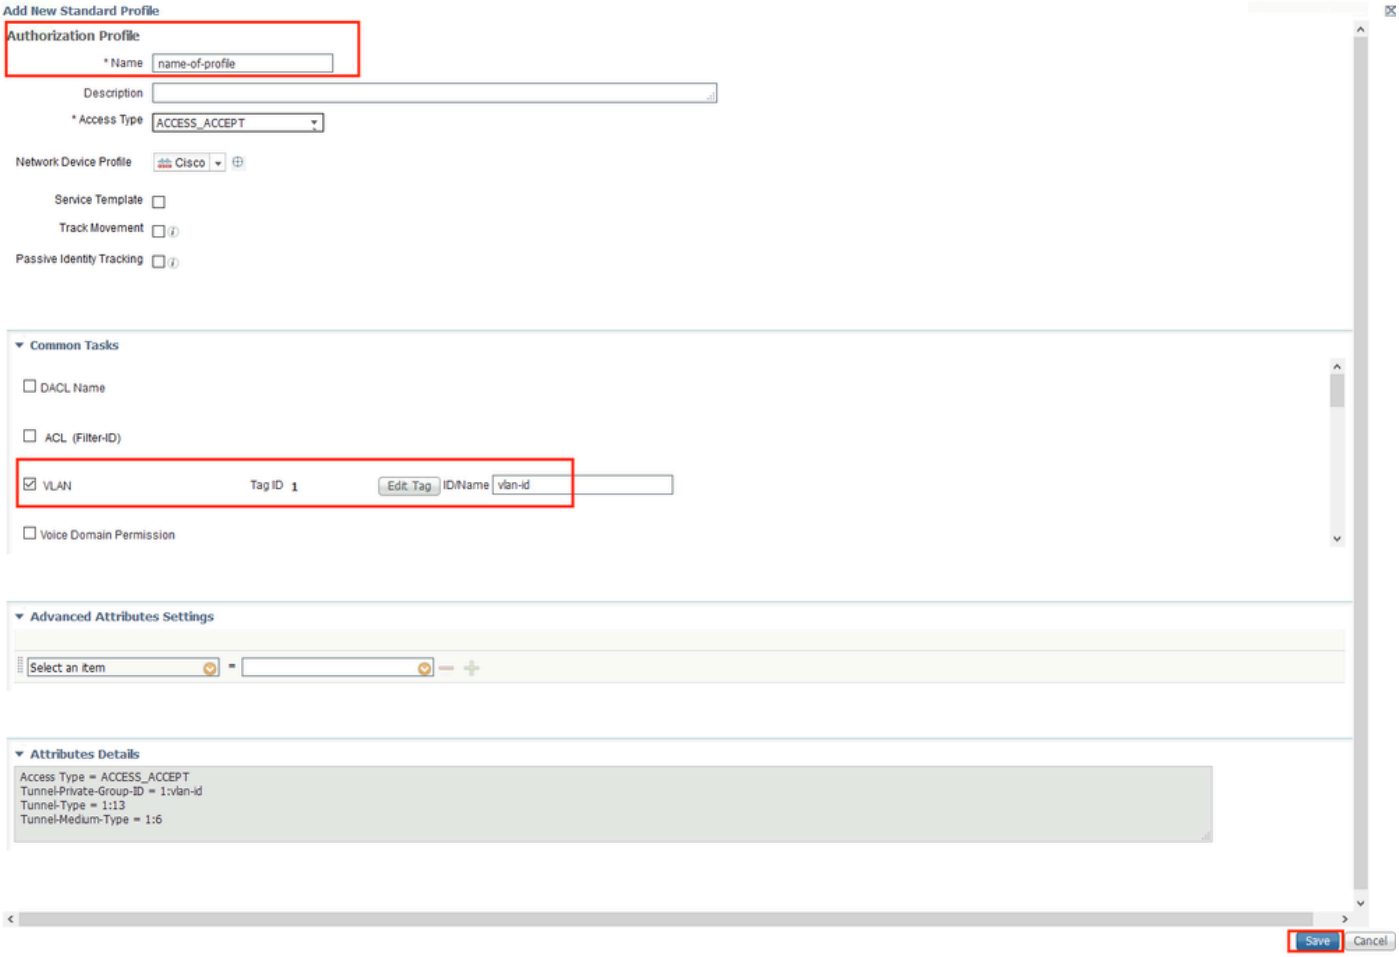

Configuration of end device

Configure a Windows 10 laptop to connect to an SSID with 802.1x Authentication using PEAP/MS-CHAPv2 (Microsoft version of the Challenge-Handshake Authentication Protocol version 2).

In this configuration example ISE uses its self-signed certificate to perform the authentication.

To create the WLAN profile on the windows machine there are two options:

1. Install the self-signed certificate on the machine to validate and trust ISE server to complete the authentication
2. Bypass the validation of the RADIUS server and trust any RADIUS server used to perform the authentication (not recommended, as it can become a security issue)


The configuration for these options are explained on End device configuration - Create the WLAN Profile - Step 7.

End device configuration - Install ISE self-signed certificate

Step 1. Export self-signed certificate from ISE.

Log in to ISE and navigate to **Administration > System > Certificates > System Certificates**.

Then select the certificate used for **EAP Authentication** and click E**xport.**

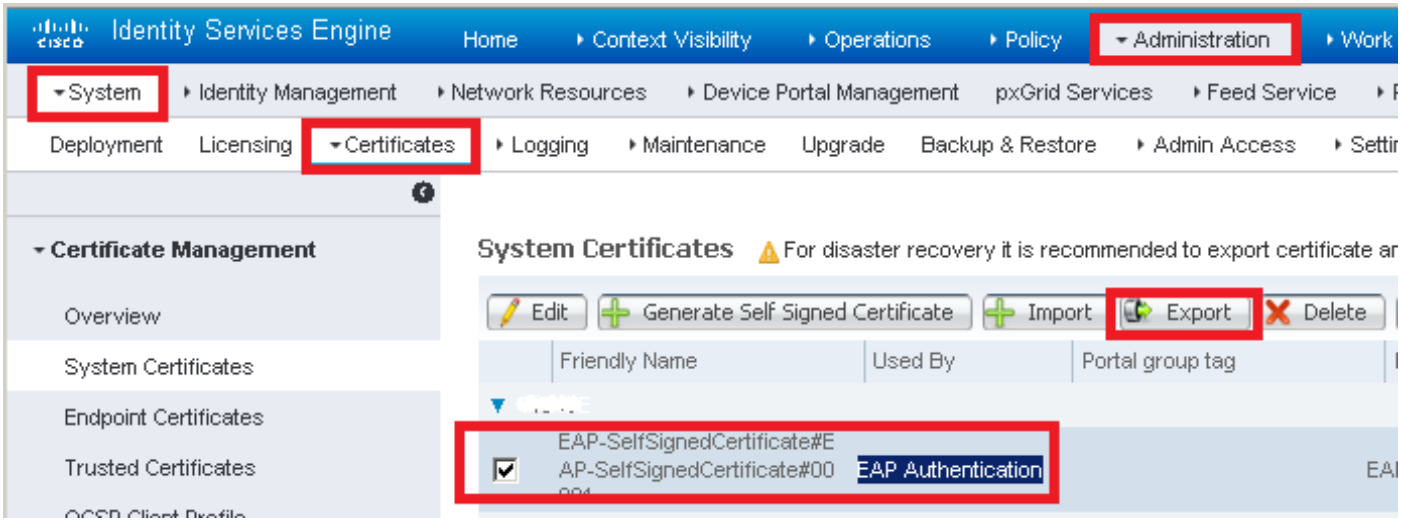

Save the certificate in the needed location. This certificate is installed on the Windows machine.




Step 2. Install the certificate in the Windows machine.


Copy the certificate exported before into the Windows machine, change the extension of the file from .pem to .crt, after that double click on it and select **Install Certificate...**.




Choose to install it in **Local Machine,** then click **Next.**

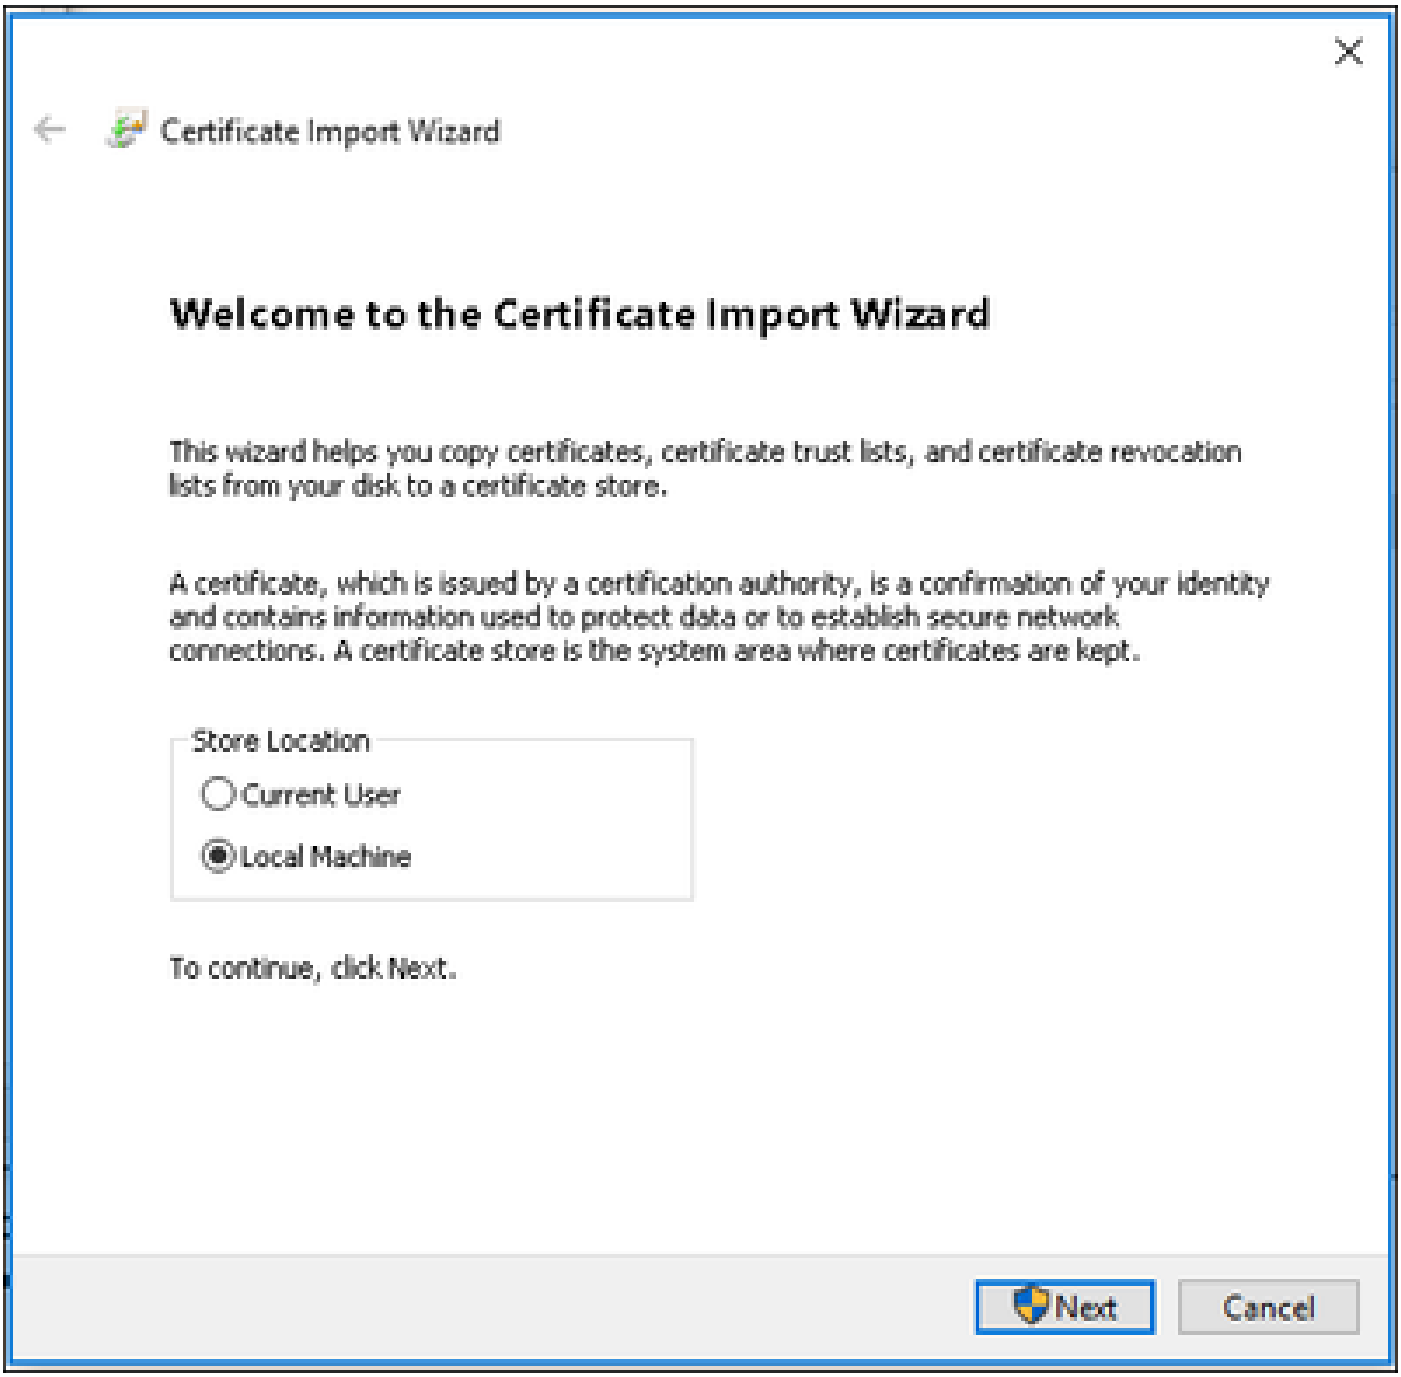


Select **Place all certificates in the following store**, then browse and choose **Trusted Root Certification Authorities**. After that click **Next**.

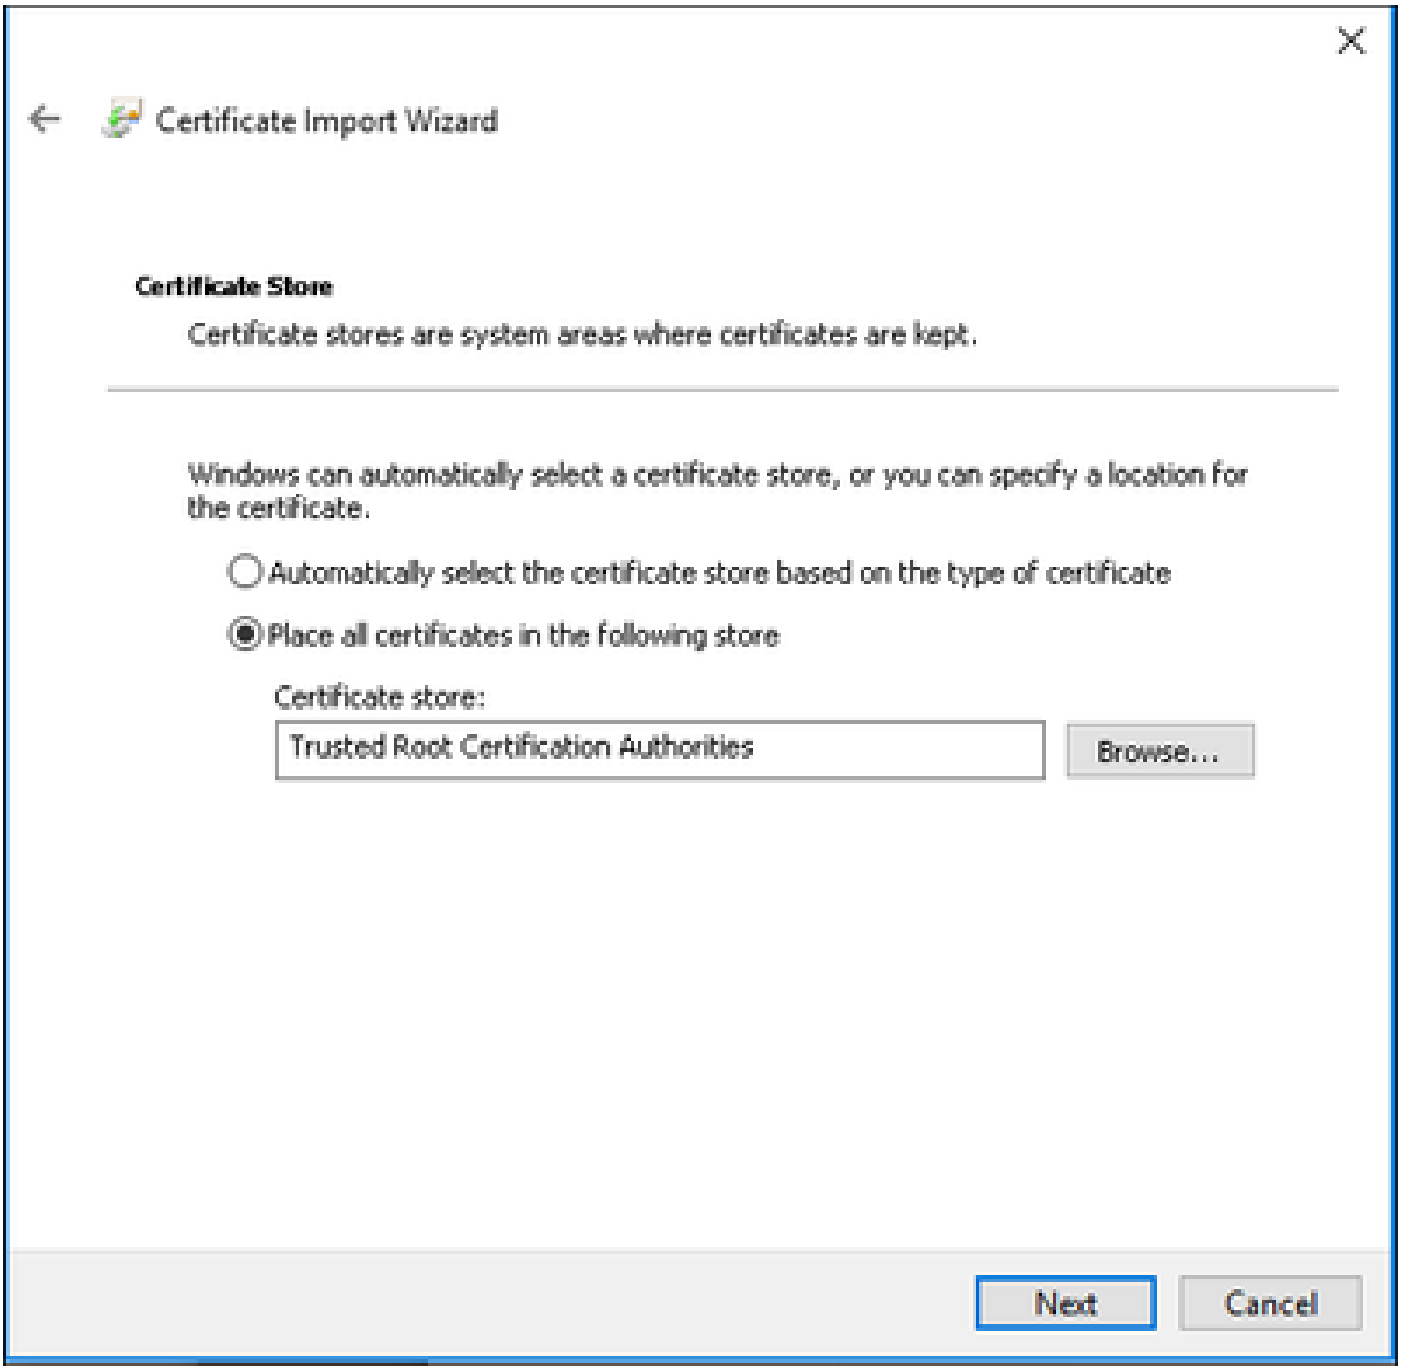


Then click **Finish.**

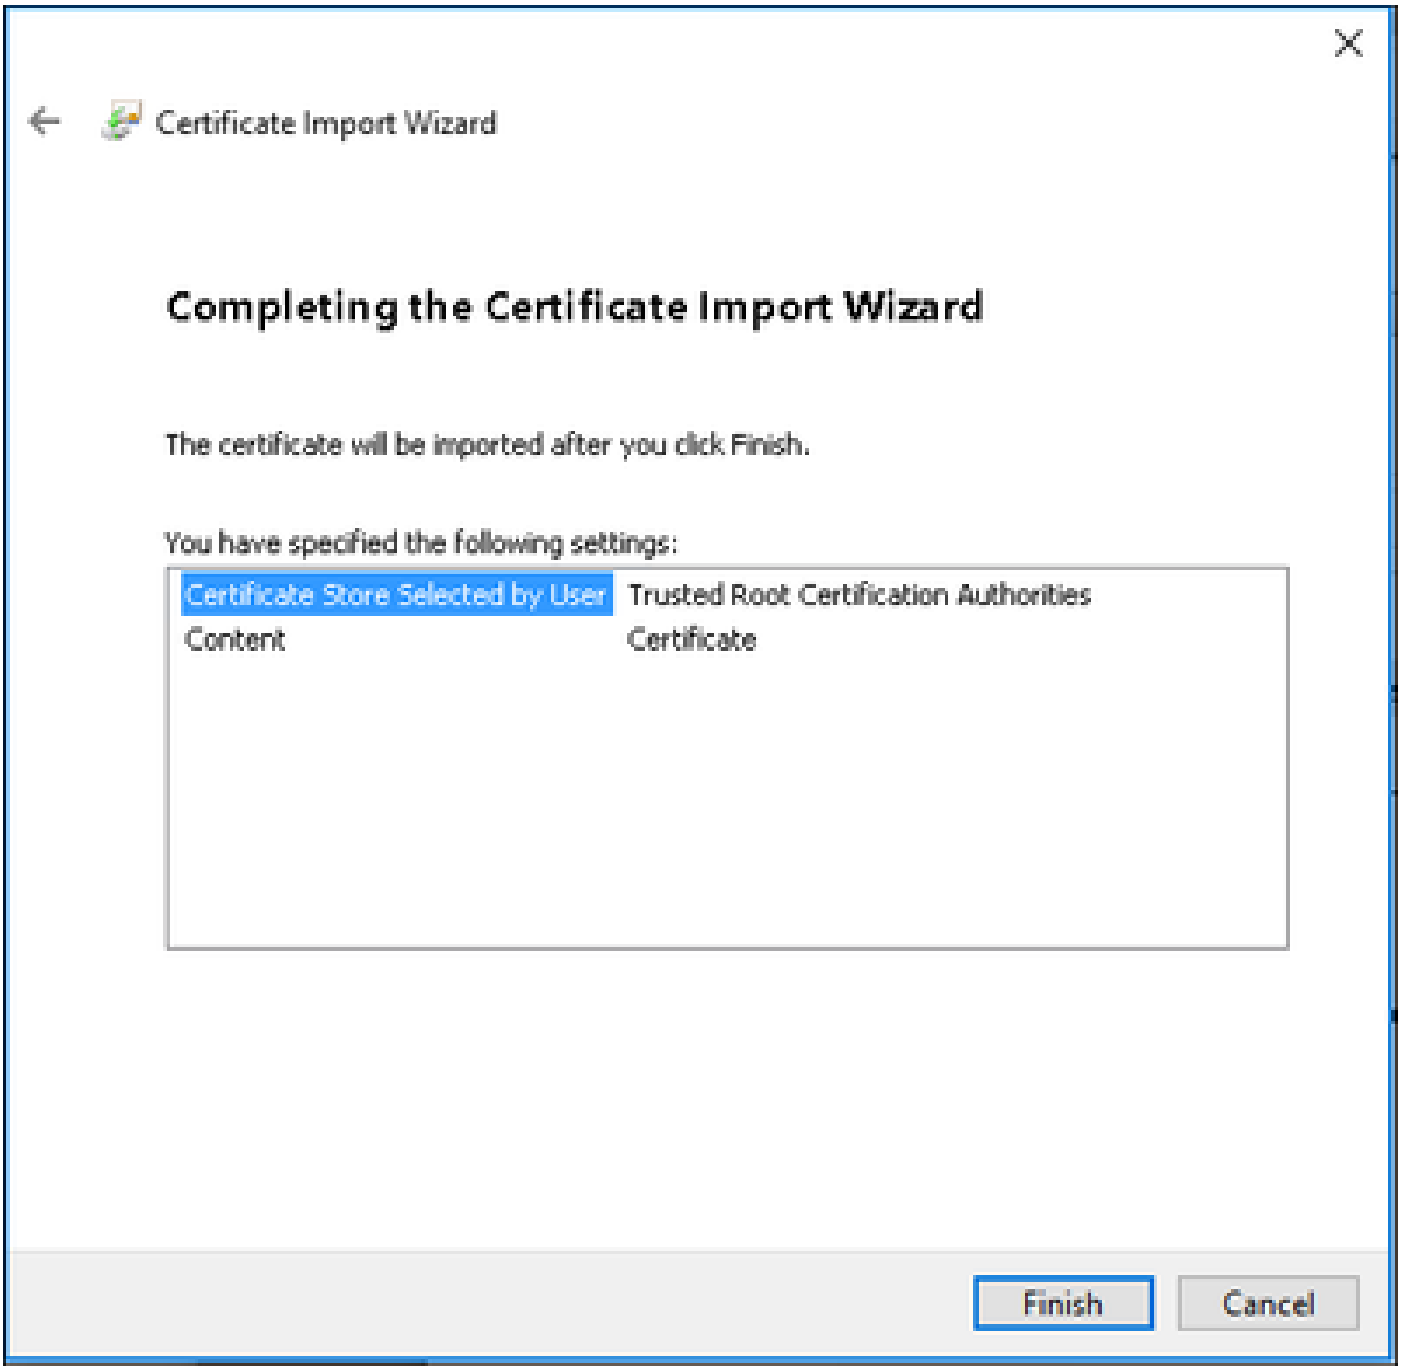

At the end click **Yes** to confirm the installation of the certificate.

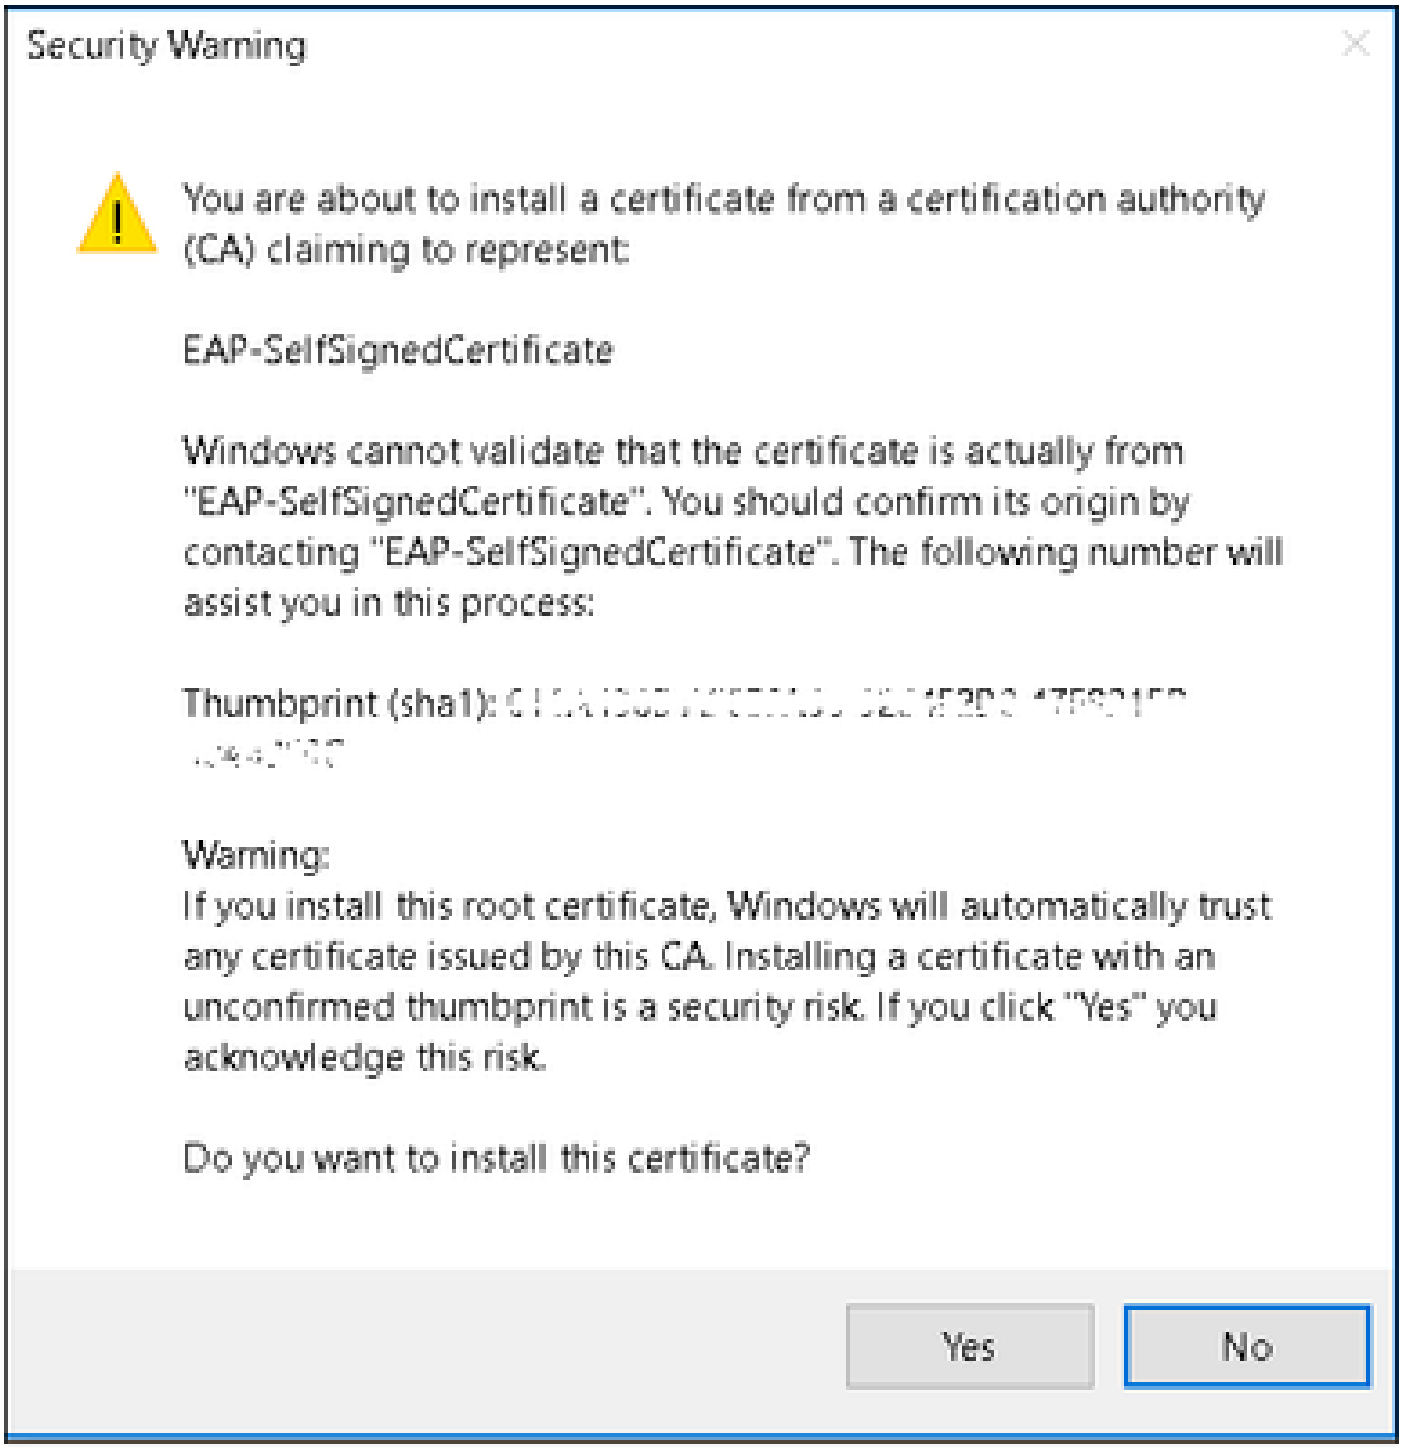



Finally click **OK.**

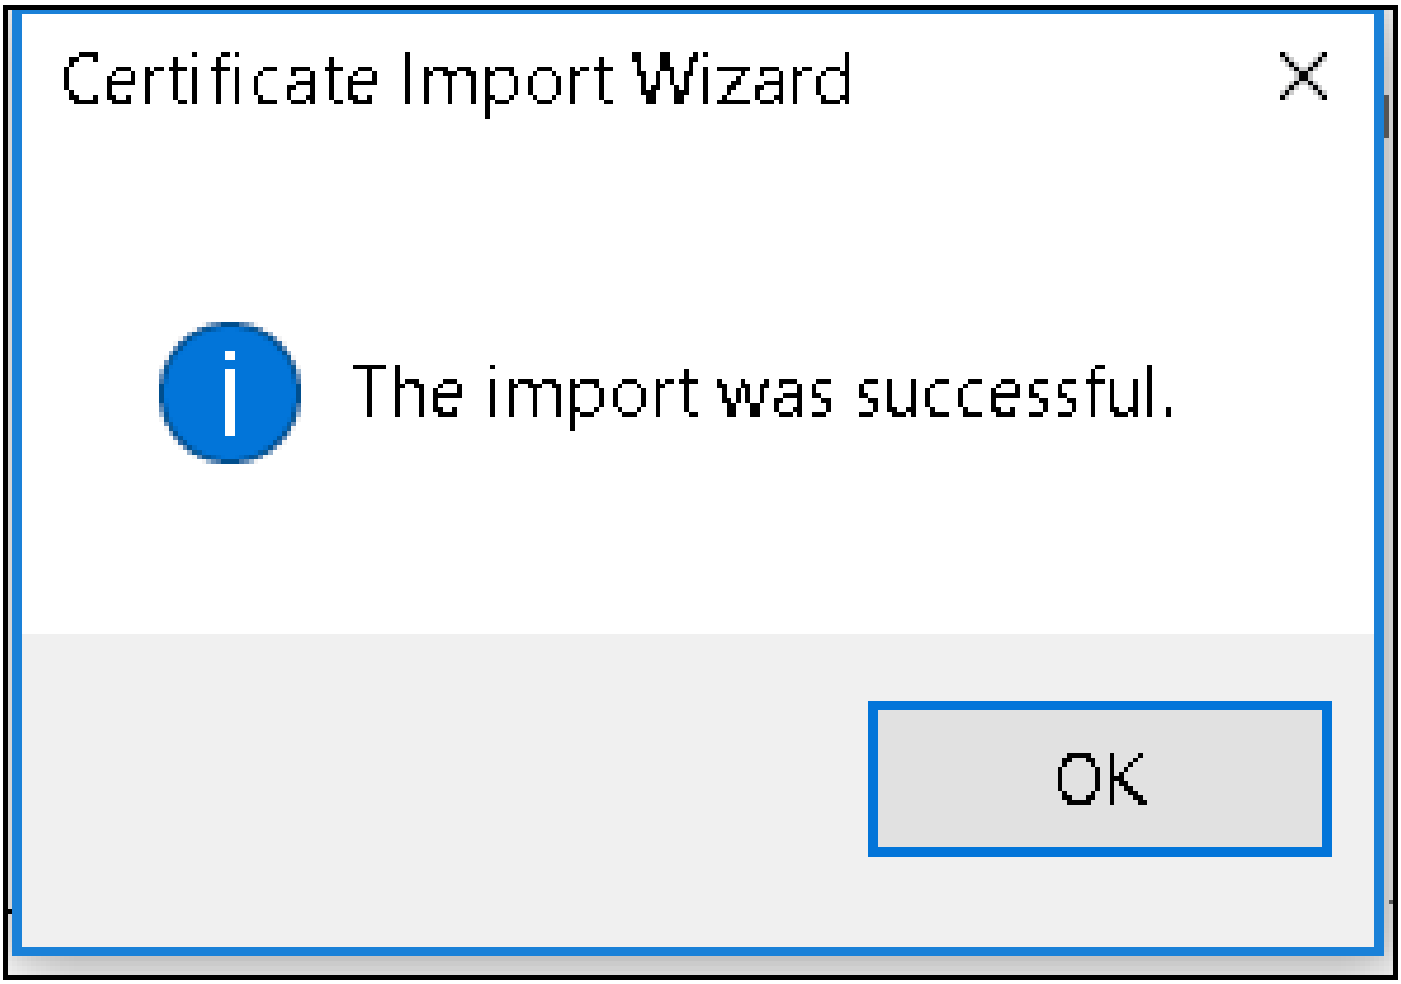


End device configuration - Create the WLAN Profile

Step 1. Right click on **Start** icon and select **Control panel.**

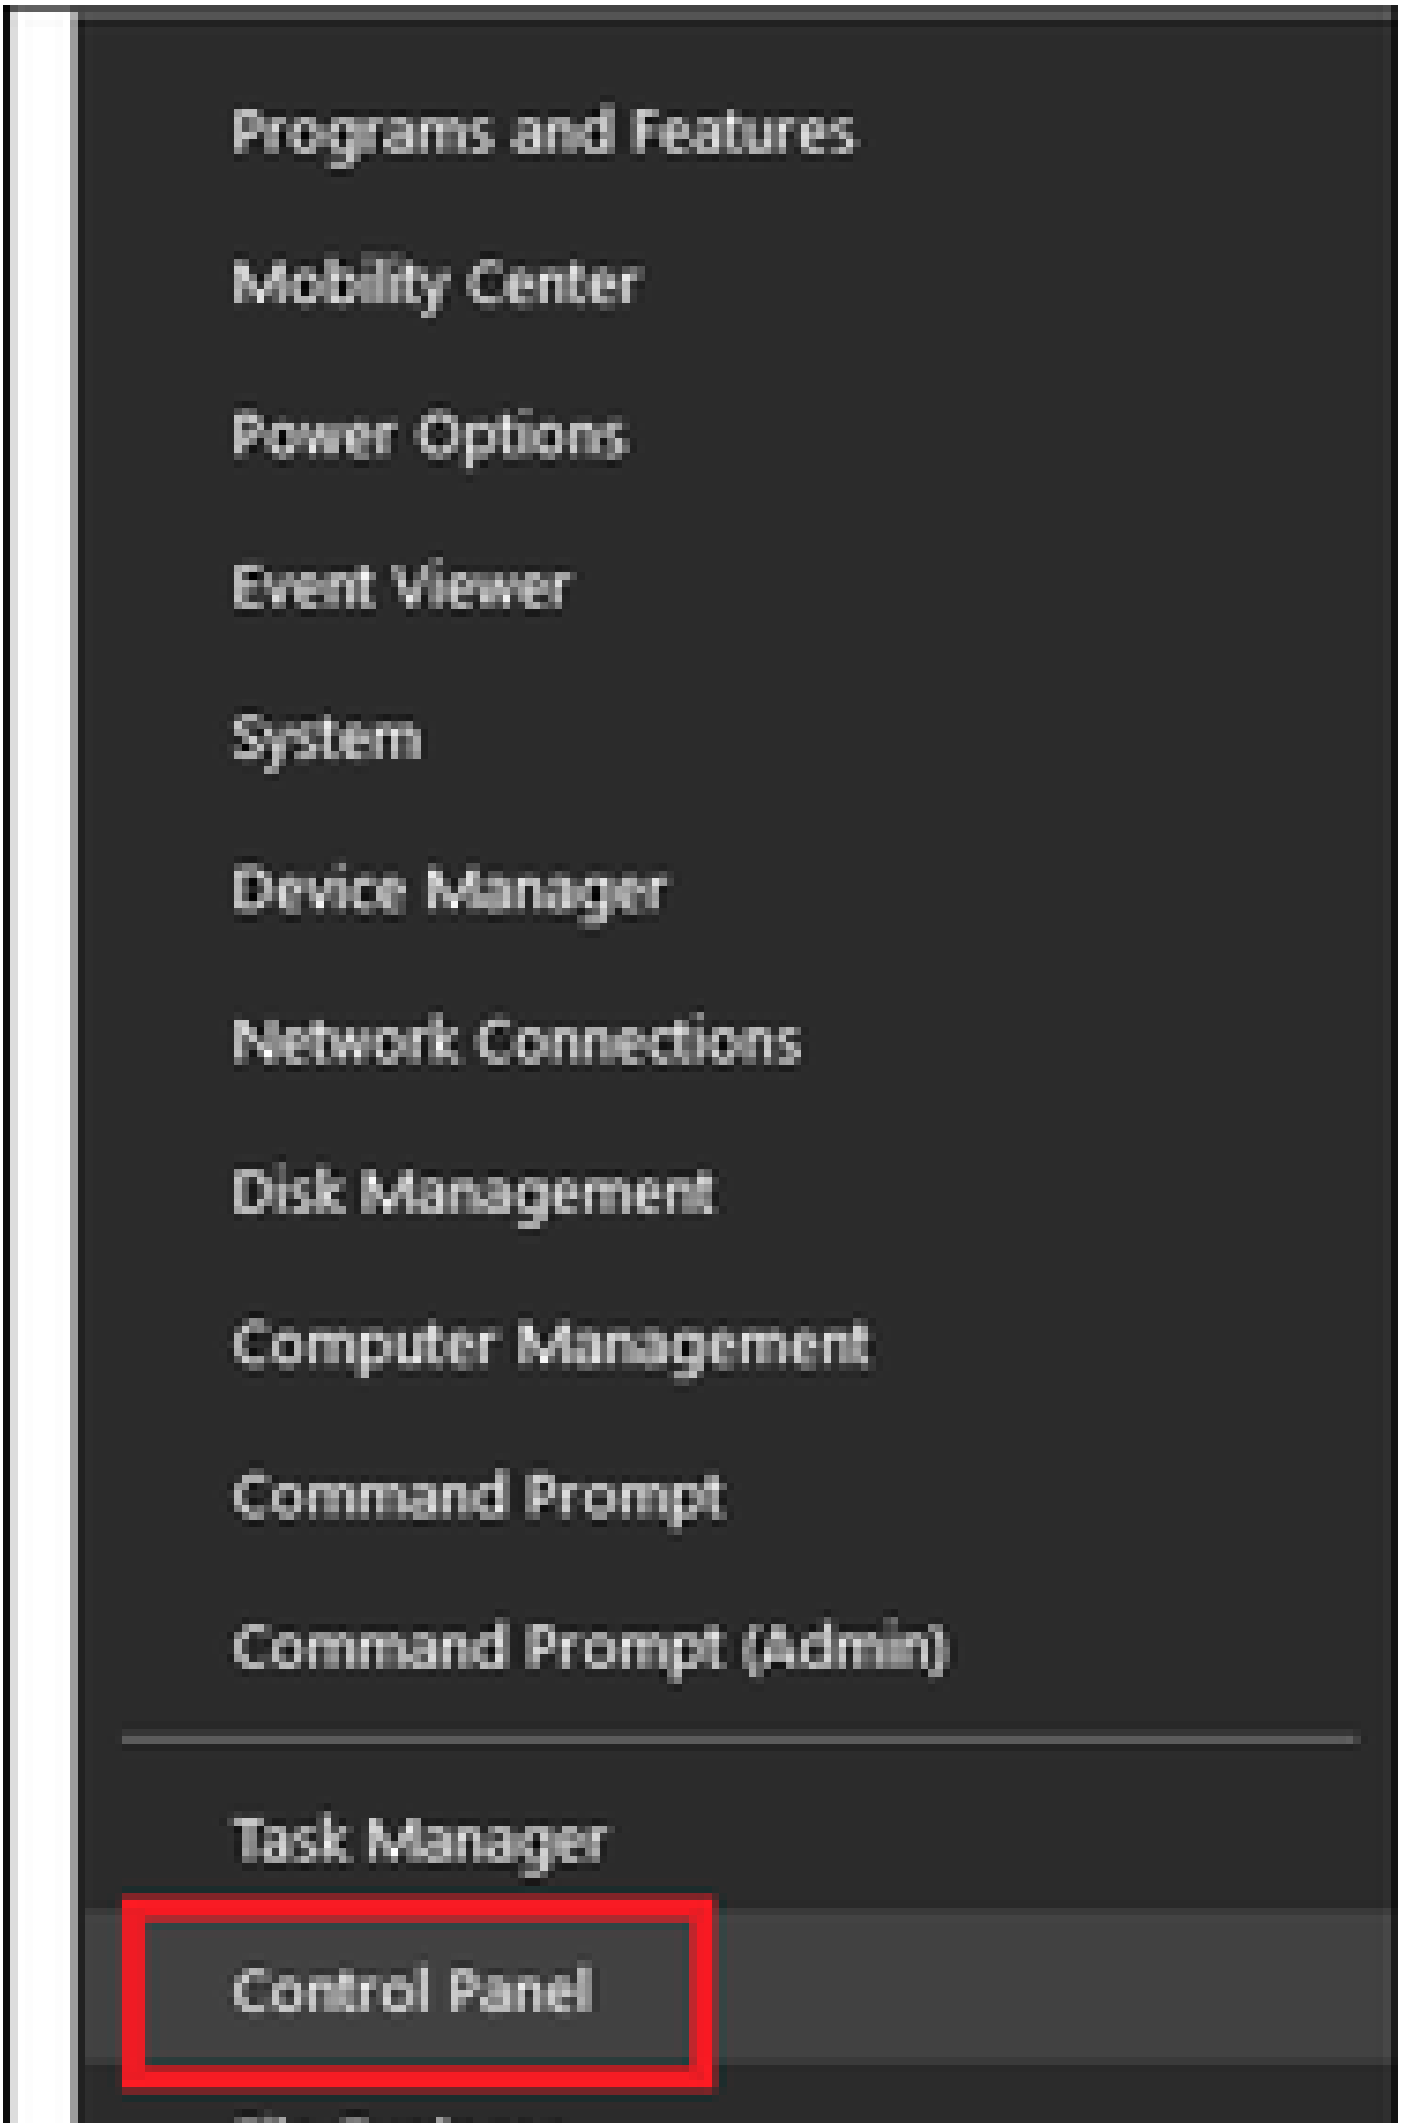

Programs and Features
Mobility Center
Power Options
Event Viewer
System
Device Manager
Network Connections
Disk Management
Computer Management
Command Prompt
Command Prompt (Admin)
Task Manager
Control Panel

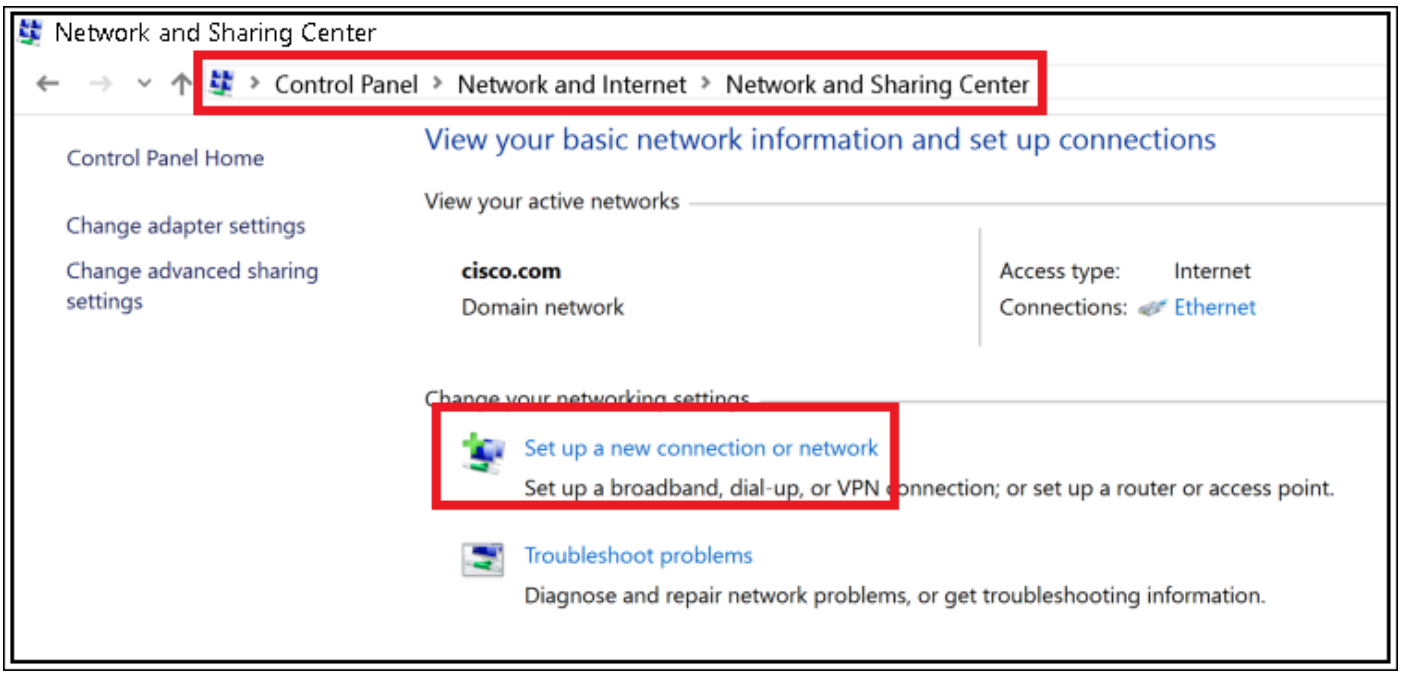


Step 3. Select **Manually connect to a wireless network** and click **Next**.

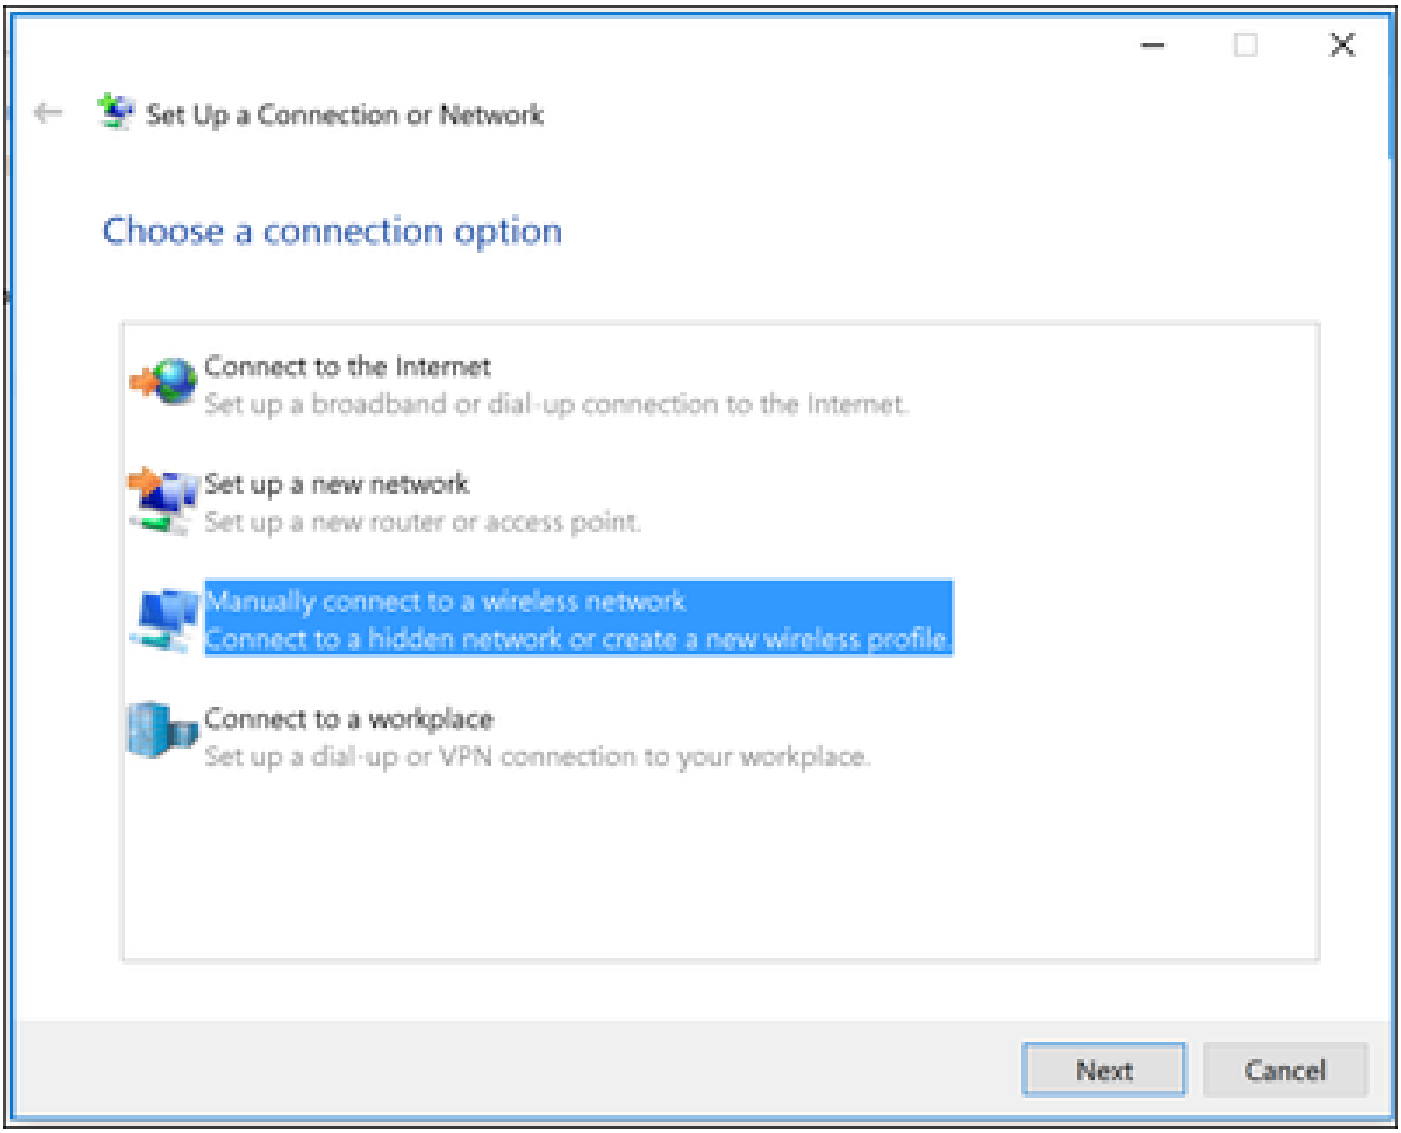


Step 4. Enter the information with the name of the SSID and security type WPA2-Enterprise and click **Next**.

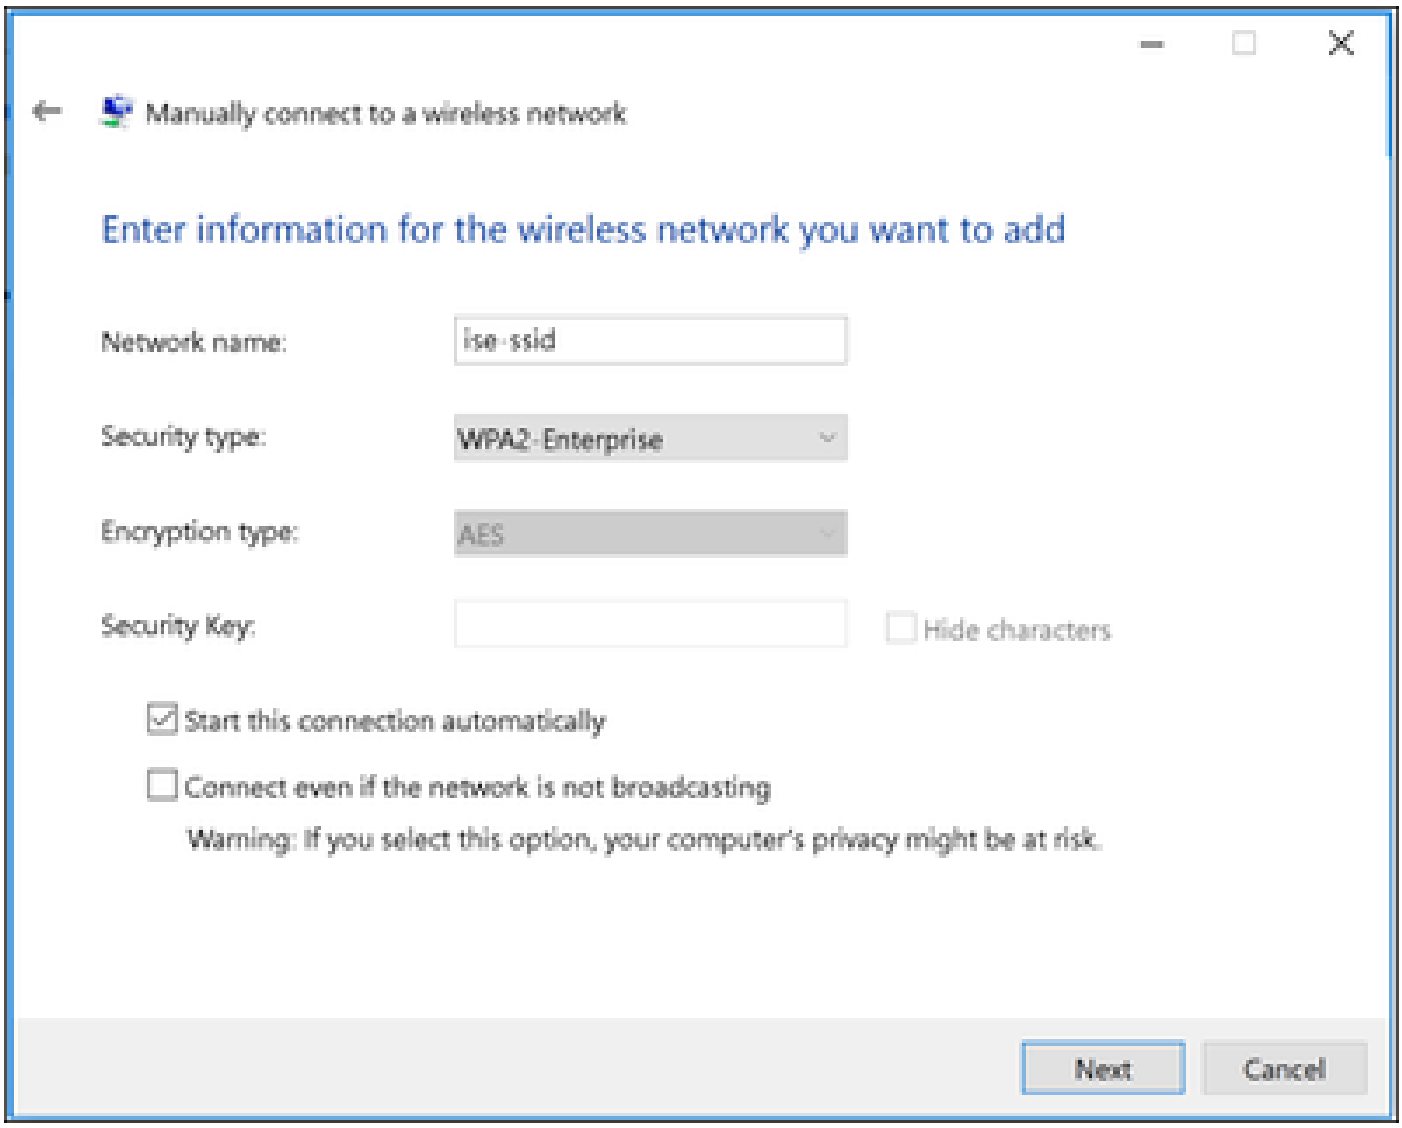

Step 5. Select **Change connection settings** to customize the configuration of the WLAN profile.

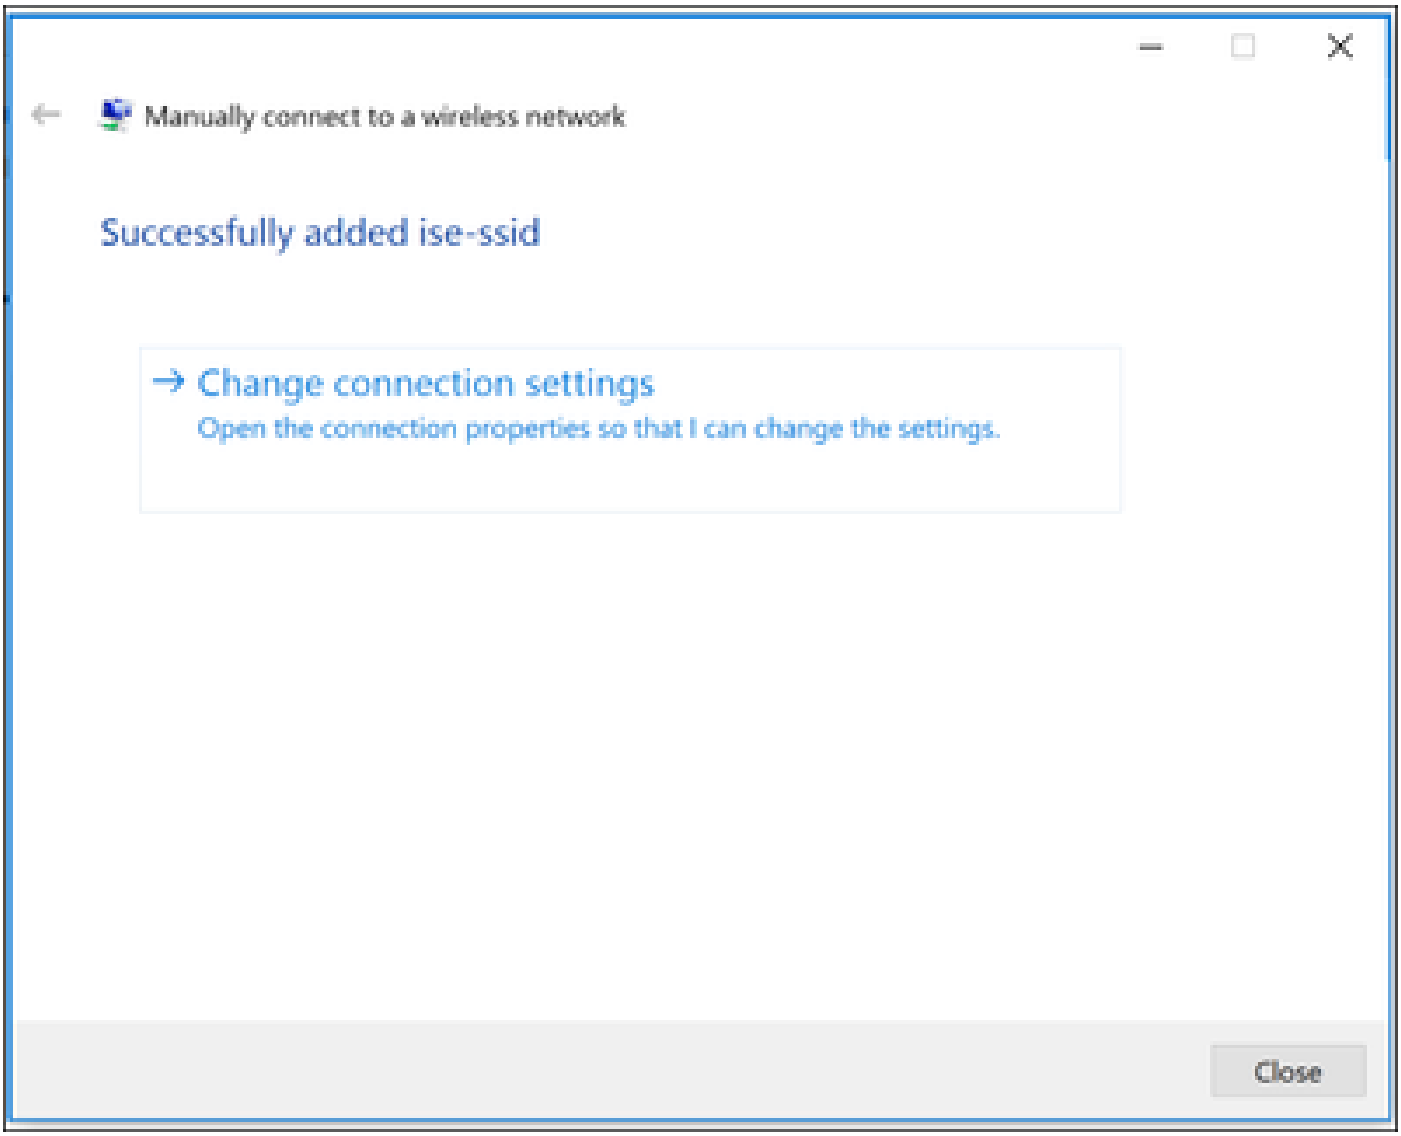


Step 6. Navigate to **Security** tab and click **Settings.**

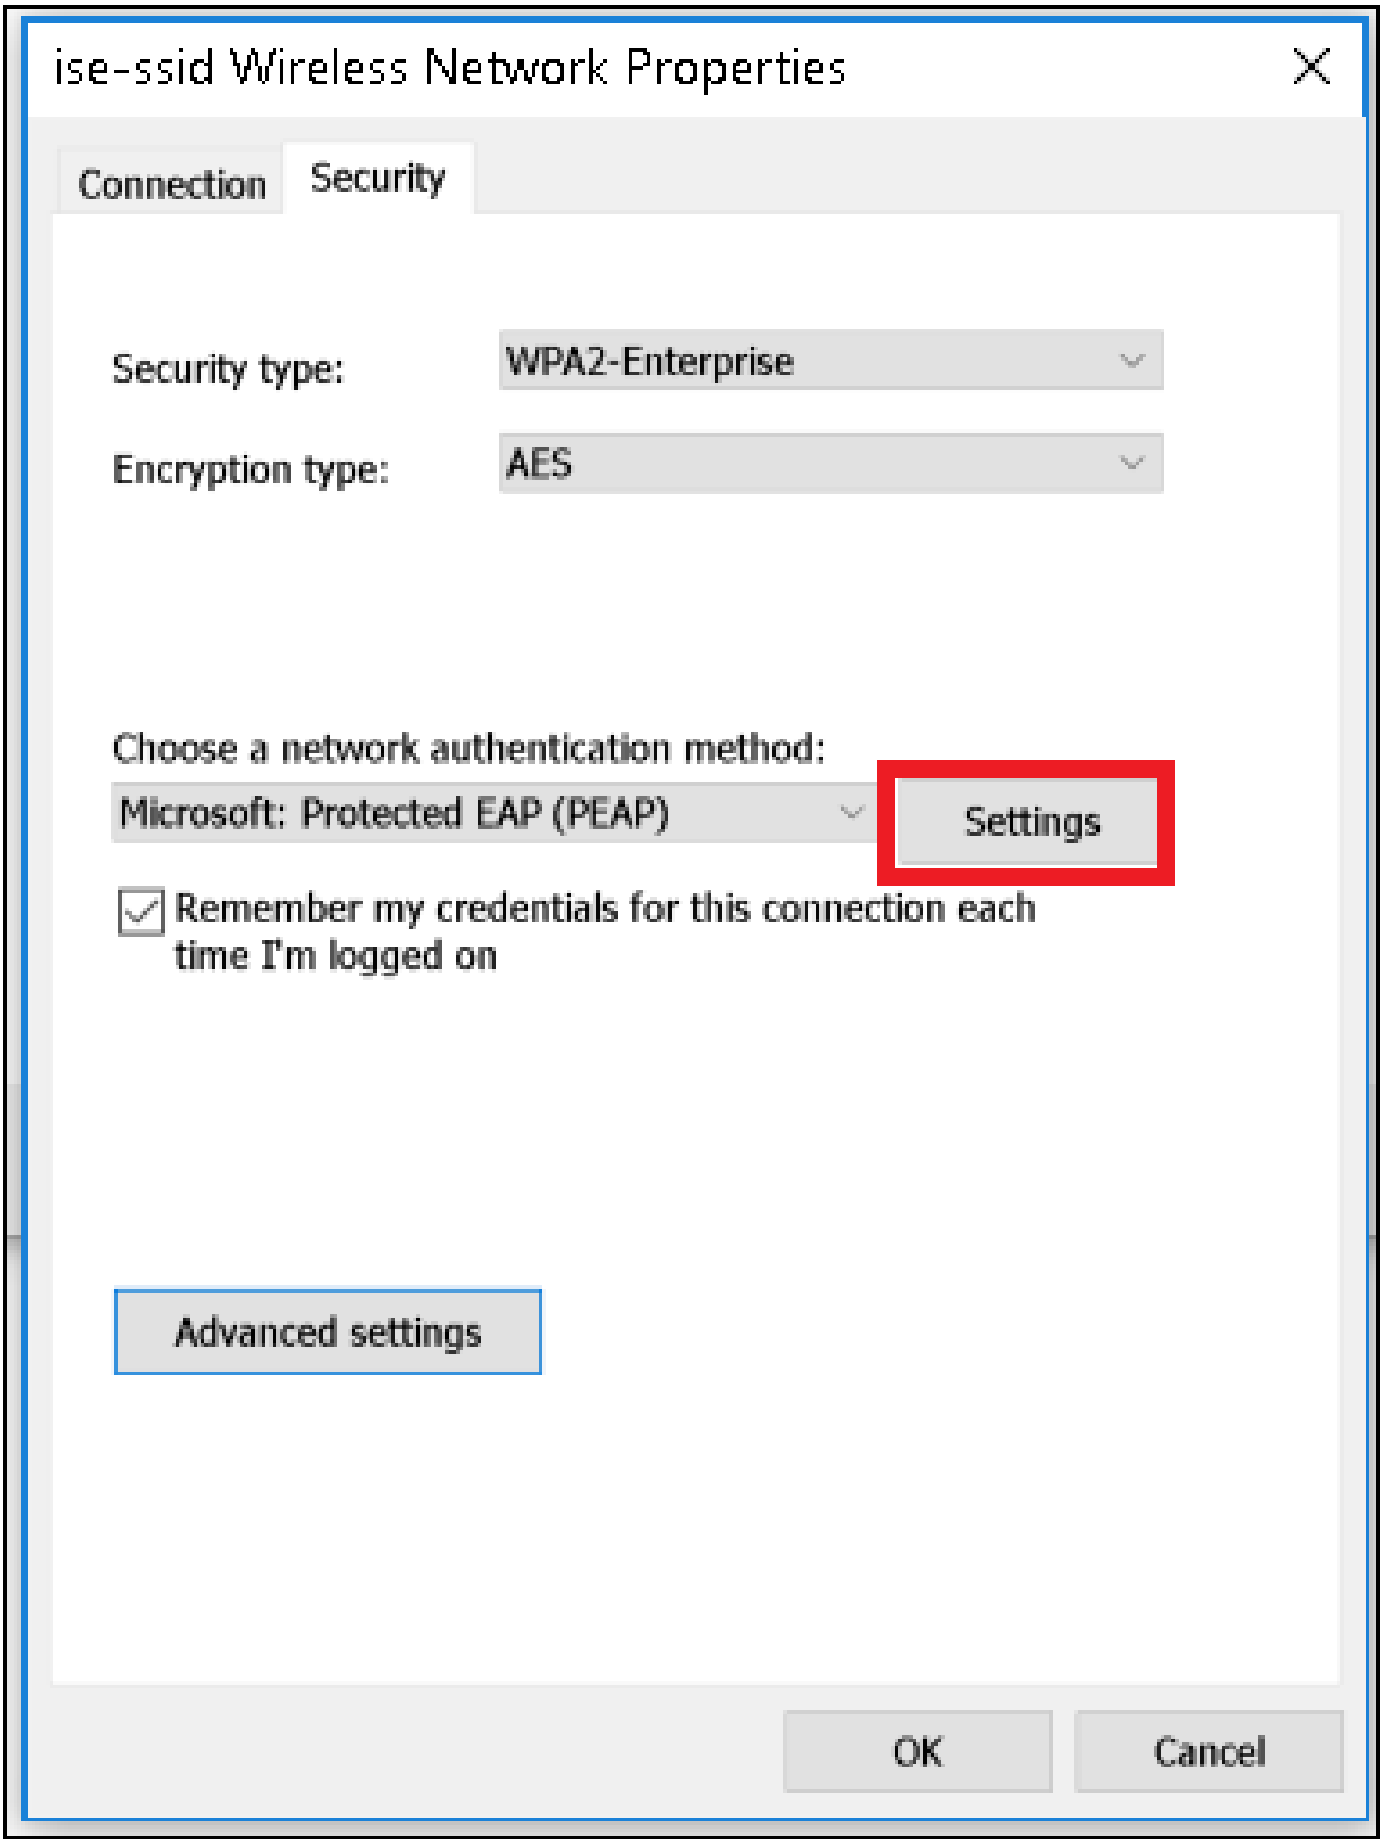


Step 7. Choose if RADIUS server is validated or not.


If yes, enable **Verify the server's identity by validating the certificate** and from **Trusted Root Certification Authorities:** list select the self-signed certificate of ISE.


After that select **Configure** and disable **Automatically use my Windows logon name and password...**, then click **OK**

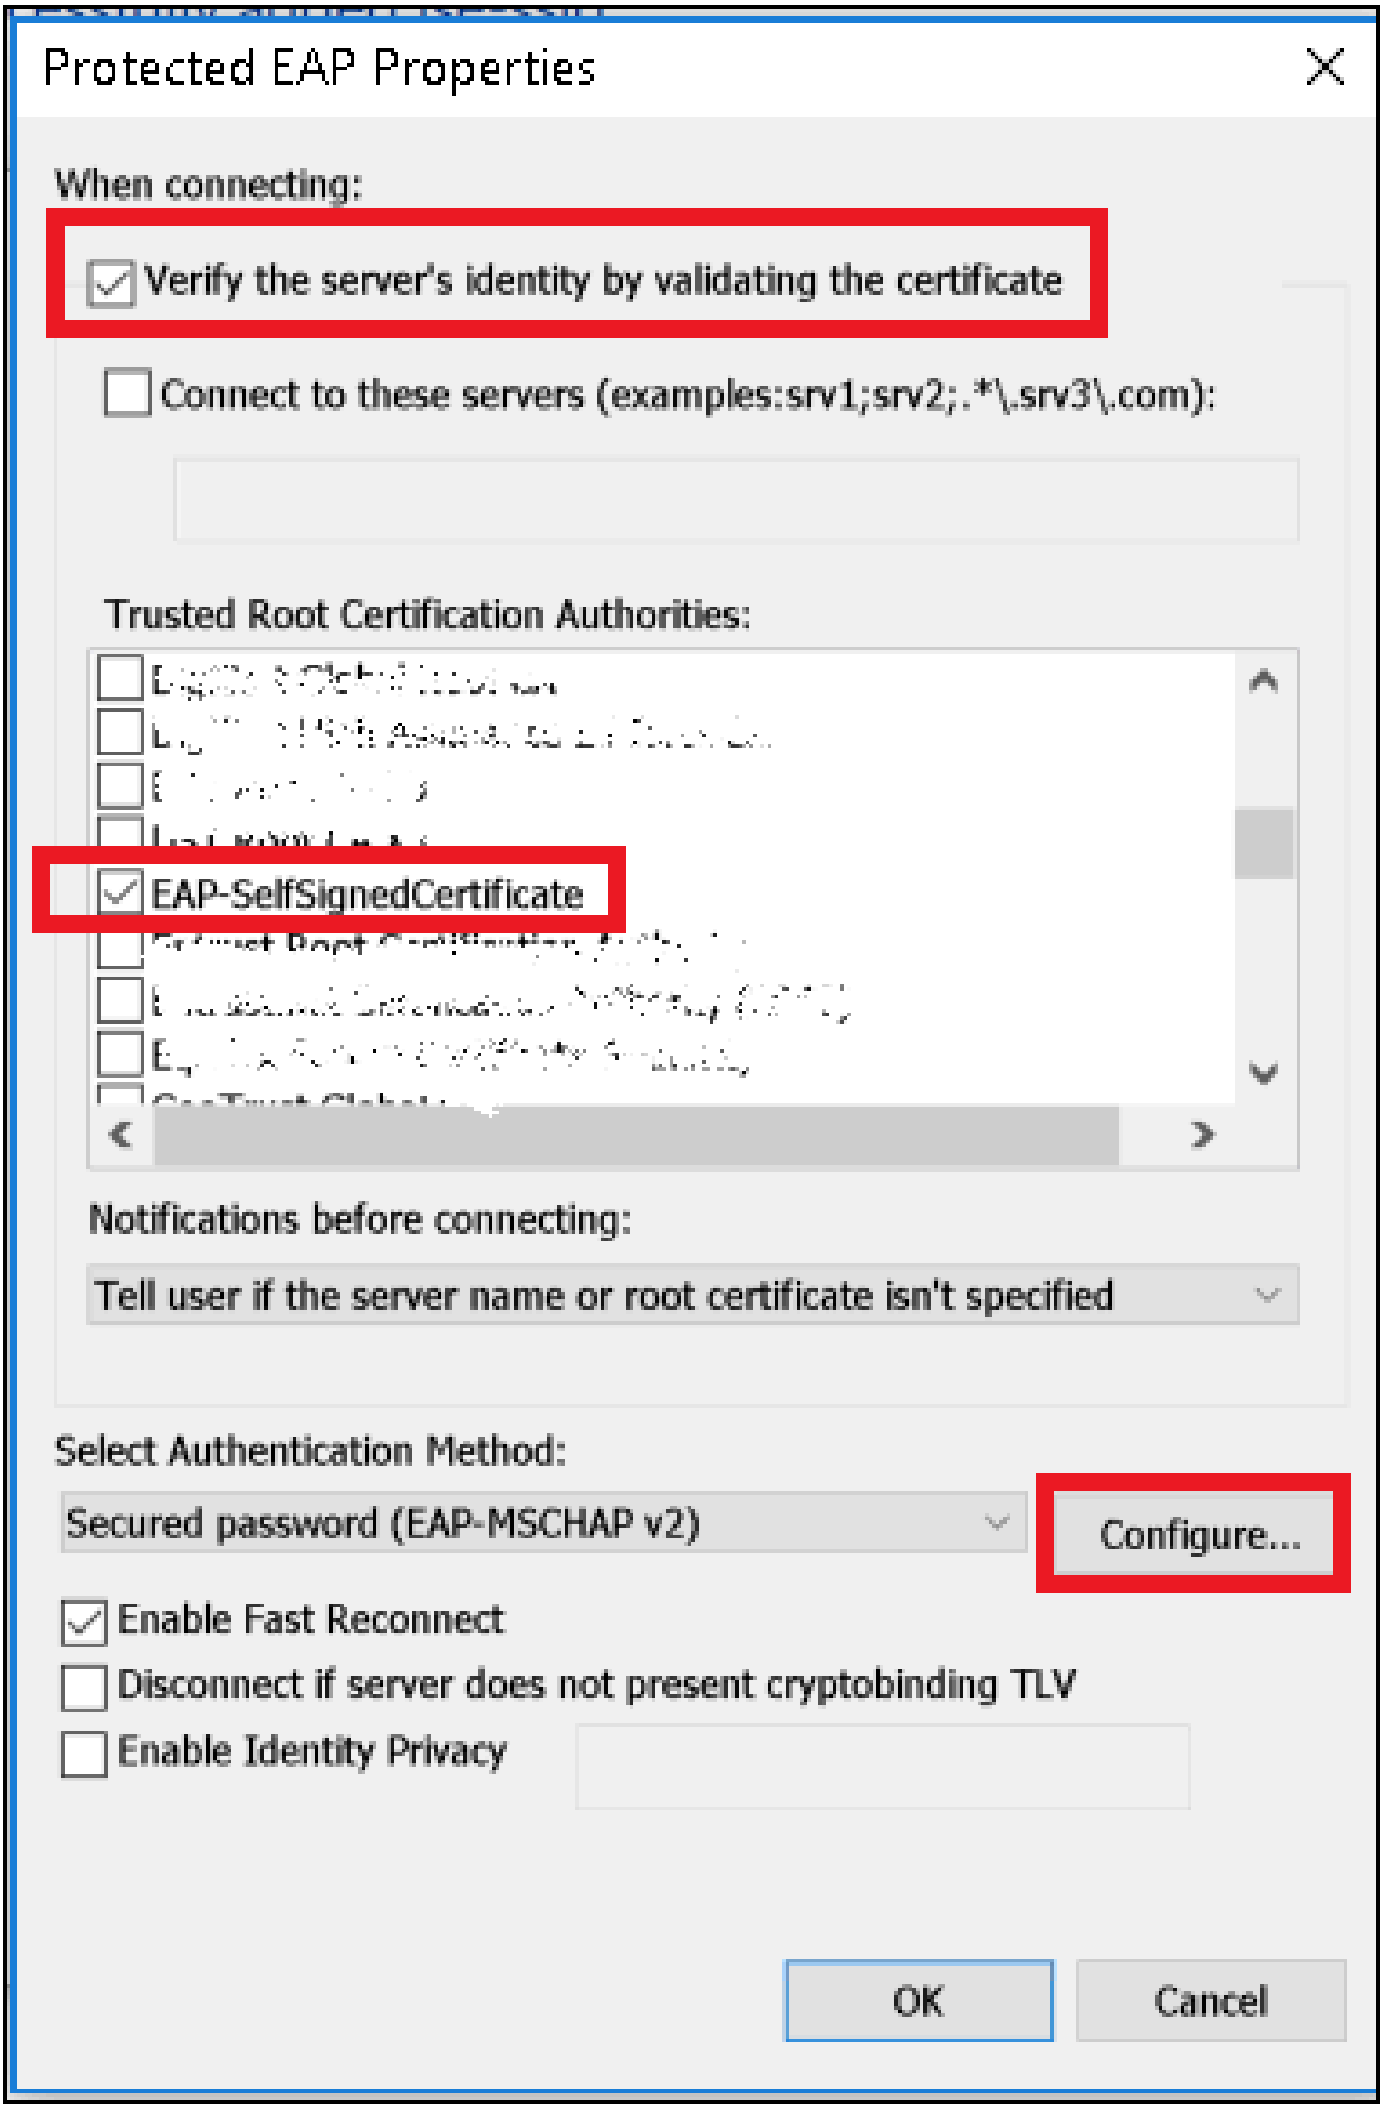
Protected EAP Properties
When connecting:
Verify the server's identity by validating the certificate
Connect to these servers (examples:srv1;srv2;.*\.srv3\.com):
Trusted Root Certification Authorities:
EAP-SelfSignedCertificate
Notifications before connecting:
Tell user if the server name or root certificate isn't specified
Select Authentication Method:
Secured password (EAP-MSCHAP v2)
Configure...
Enable Fast Reconnect
Disconnect if server does not present cryptobinding TLV
Enable Identity Privacy
OK
Cancel

Once back to **Security** tab, select **Advanced settings**, specify authentication mode as **User authentication** and save the credentials that were configured on ISE to authenticate the user.

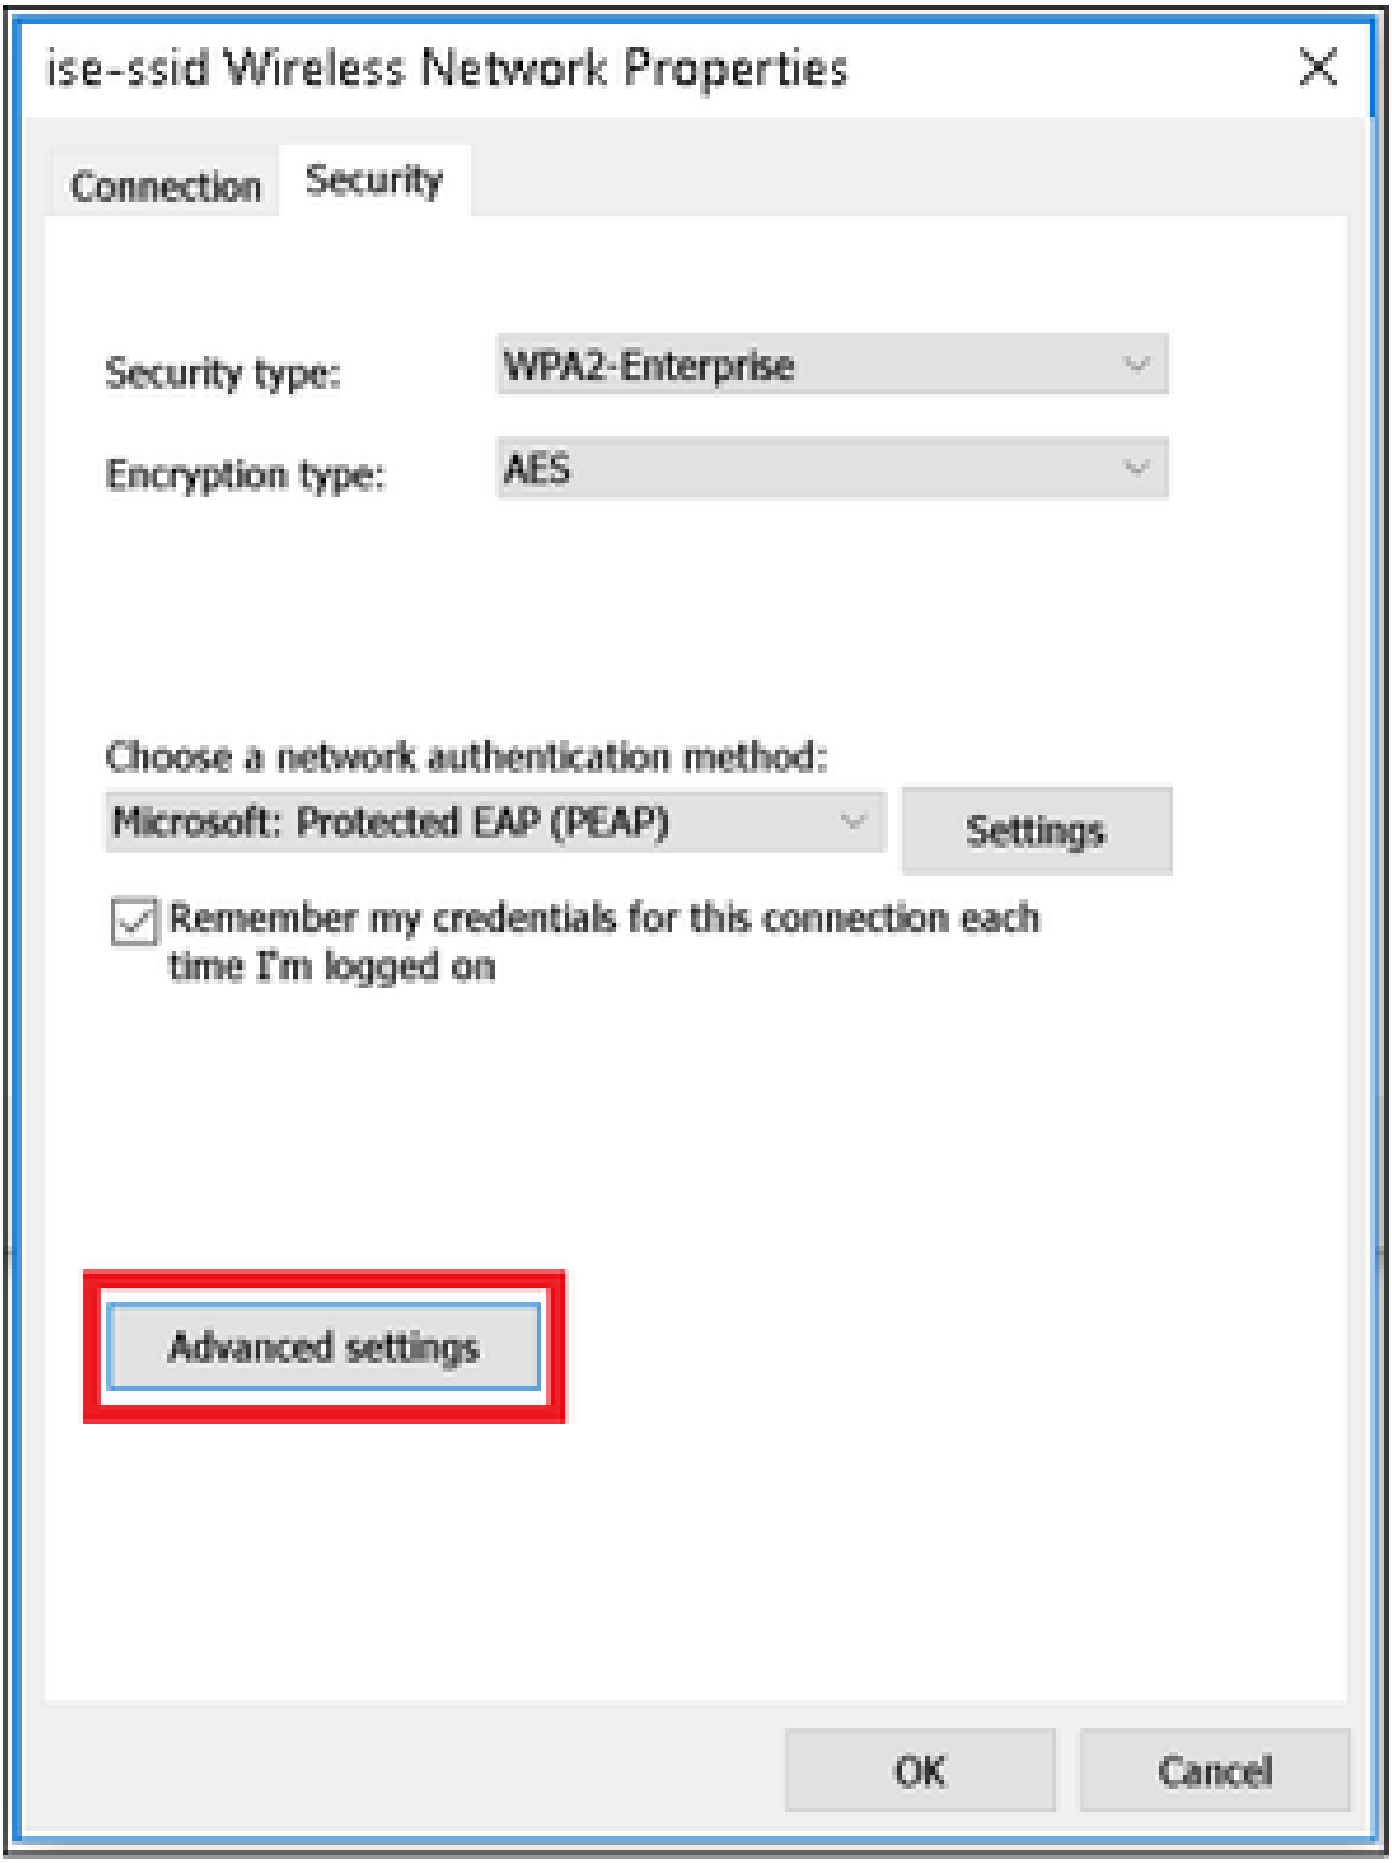
ise-ssid Wireless Network Properties
Connection
Security
Security type:
WPA2-Enterprise
Encryption type:
AES
Choose a network authentication method:
Microsoft: Protected EAP (PEAP)
Settings
Remember my credentials for this connection each time I'm logged on
Advanced settings
OK
Cancel

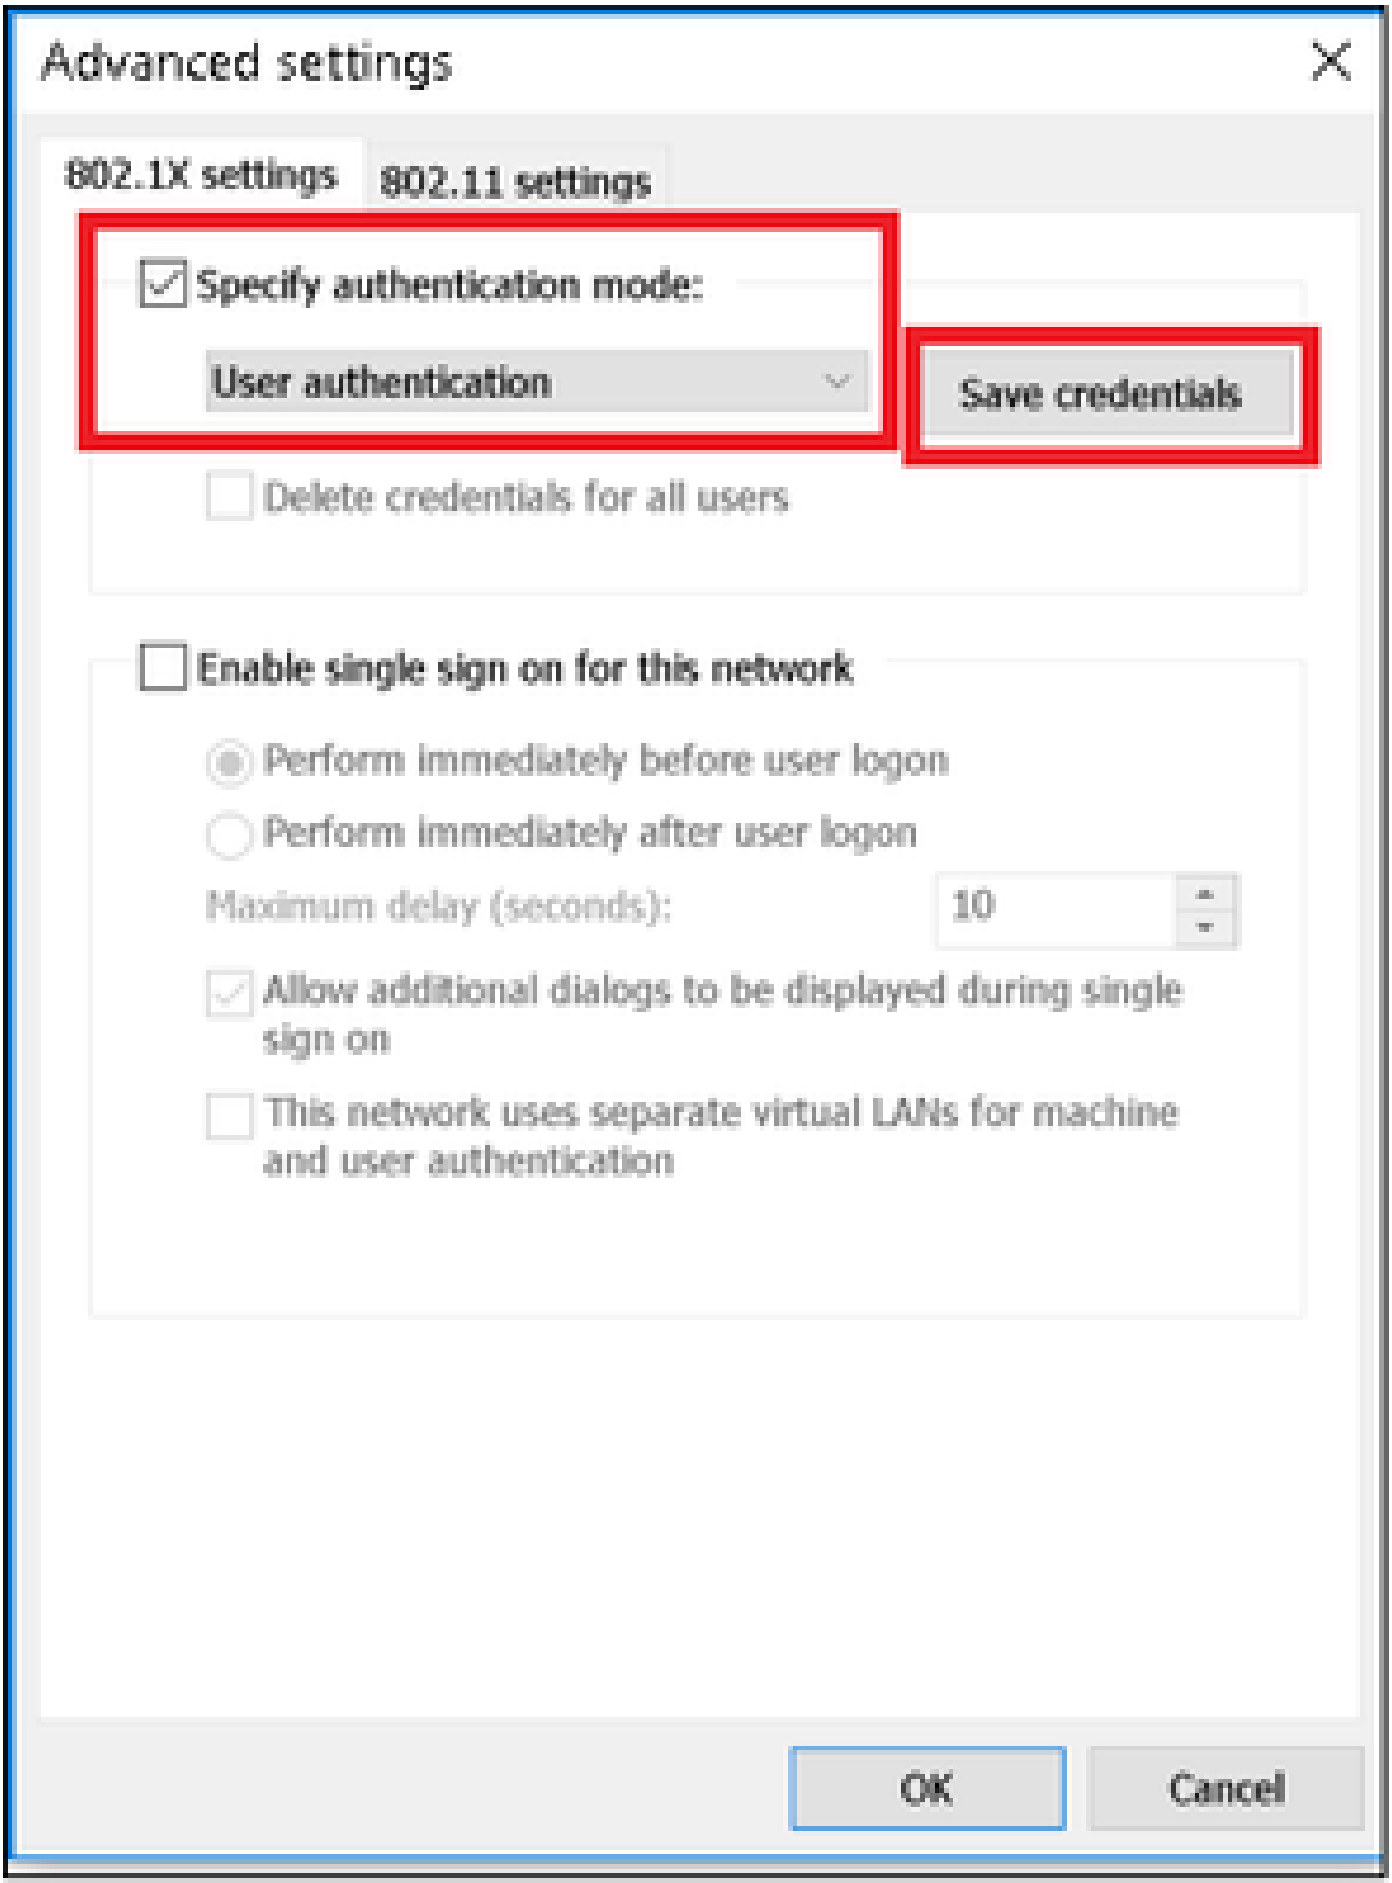
Advanced settings
802.1X settings
802.11 settings
Specify authentication mode:
User authentication
Save credentials
Delete credentials for all users
Enable single sign on for this network
Perform immediately before user logon
Perform immediately after user logon
Maximum delay (seconds):
10
Allow additional dialogs to be displayed during single sign on
This network uses separate virtual LANs for machine and user authentication
OK
Cancel

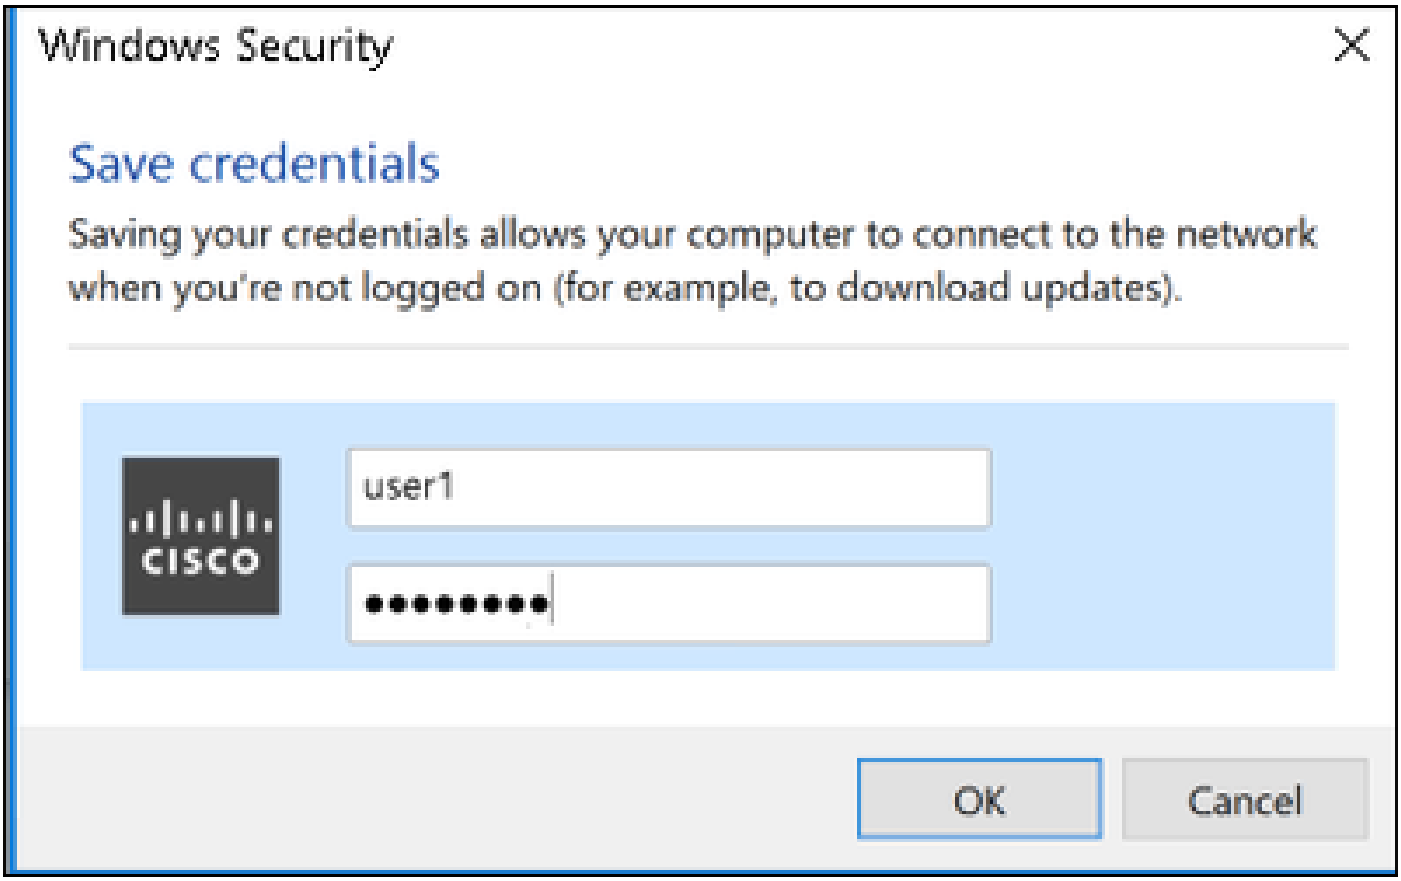

Verify

The authentication flow can be verified from WLC or from ISE perspective.

Authentication process on ME

Run this command to monitor the authentication process for a specific user:

```
> debug client <mac-add-client>
```

Example of a successful authentication (some output has been omitted):

```
<#root>

*apfMsConnTask_0: Nov 25 16:36:24.333:

08:74:02:77:13:45 Processing assoc-req station:08:74:02:77:13:45 AP:38:ed:18:c6:7b:40-01 thread:669ba80


*apfMsConnTask_0: Nov 25 16:36:24.333: 08:74:02:77:13:45 Association received from mobile on BSSID 38:e
*apfMsConnTask_0: Nov 25 16:36:24.334: 08:74:02:77:13:45 Applying site-specific Local Bridging override
*apfMsConnTask_0: Nov 25 16:36:24.334: 08:74:02:77:13:45 Applying Local Bridging Interface Policy for s
*apfMsConnTask_0: Nov 25 16:36:24.334: 08:74:02:77:13:45 Set Clinet Non AP specific apfMsAccessVlan = 2
```

*apfMsConnTask_0: Nov 25 16:36:24.334: 08:74:02:77:13:45 This apfMsAccessVlan may be changed later from
*apfMsConnTask_0: Nov 25 16:36:24.334: 08:74:02:77:13:45 Received 802.11i 802.1X key management suite,
*apfMsConnTask_0: Nov 25 16:36:24.335:

08:74:02:77:13:45 0.0.0.0 START (0) Change state to AUTHCHECK (2) last state START (0)

*apfMsConnTask_0: Nov 25 16:36:24.335: 0

8:74:02:77:13:45 0.0.0.0 AUTHCHECK (2) Change state to 8021X_REQD (3) last state AUTHCHECK (2)

*apfMsConnTask_0: Nov 25 16:36:24.335:

08:74:02:77:13:45 0.0.0.0 8021X_REQD (3) DHCP required on AP 38:ed:18:c6:7b:40 vapId 3 apVapId 3for this

*apfMsConnTask_0: Nov 25 16:36:24.335: 08:74:02:77:13:45 apfPemAddUser2:session timeout forstation 08:7
*apfMsConnTask_0: Nov 25 16:36:24.335: 08:74:02:77:13:45 Stopping deletion of Mobile Station: (callerId
*apfMsConnTask_0: Nov 25 16:36:24.335: 08:74:02:77:13:45 Func: apfPemAddUser2, Ms Timeout = 0, Session
*apfMsConnTask_0: Nov 25 16:36:24.335: 0

8:74:02:77:13:45 Sending assoc-resp with status 0 station:08:74:02:77:13:45 AP:38:ed:18:c6:7b:40-01 on a

*apfMsConnTask_0: Nov 25 16:36:24.335:

08:74:02:77:13:45 Sending Assoc Response to station on BSSID 38:ed:18:c6:7b:4d (status 0) ApVapId 3 Slot

*spamApTask0: Nov 25 16:36:24.341: 08:74:02:77:13:45 Sent dot1x auth initiate message for mobile 08:74:
*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.342: 08:74:02:77:13:45 reauth_sm state transition 0 ---> 1 for mob
*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.342: 08:74:02:77:13:45 EAP-PARAM Debug - eap-params for Wlan-Id :3
*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.342: 08:74:02:77:13:45 Disable re-auth, use PMK lifetime.
*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.342: 08:74:02:77:13:45 Station 08:74:02:77:13:45 setting dot1x rea
*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.342: 08:74:02:77:13:45 dot1x - moving mobile 08:74:02:77:13:45 int
*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.342:

08:74:02:77:13:45 Sending EAP-Request/Identity to mobile 08:74:02:77:13:45 (EAP Id 1)

*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.401:

08:74:02:77:13:45 Received EAPOL EAPPKT from mobile 08:74:02:77:13:45

*Dot1x_NW_MsgTask_0: Nov 25 16:36:24.401:

08:74:02:77:13:45 Received Identity Response (count=1) from mobile 08:74:02:77:13:45

.
.
.
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.978:

08:74:02:77:13:45 Processing Access-Accept for mobile 08:74:02:77:13:45

*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.978:

08:74:02:77:13:45 Username entry (user1) created in mscb for mobile, length = 253

*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.978: 08:74:02:77:13:45 Station 08:74:02:77:13:45 setting dot1x rea
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.978: 08:74:02:77:13:45 Creating a PKC PMKID Cache entry for statio
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Adding BSSID 38:ed:18:c6:7b:4d to PMKID cac

```
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: New PMKID: (16)
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: [0000] 80 3a 20 8c 8f c2 4c 18 7d 4c 28 e7 7f 10 11 03
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Adding Audit session ID payload in Mobility
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 0 PMK-update groupcast messages sent
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 PMK sent to mobility group
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Disabling re-auth since PMK lifetime can ta
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Sending EAP-Success to mobile 08:74:02:77:1
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Freeing AAACB from Dot1xCB as AAA auth is d
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Found an cache entry for BSSID 38:ed:18:c6:
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: 08:74:02:77:13:45 Found an cache entry for BSSID 38:ed:18:c6:
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: Including PMKID in M1 (16)
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: [0000] 80 3a 20 8c 8f c2 4c 18 7d 4c 28 e7 7f 10 11 03
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: M1 - Key Data: (22)
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: [0000] dd 14 00 0f ac 04 80 3a 20 8c 8f c2 4c 18 7d 4c
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979: [0016] 28 e7 7f 10 11 03
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.979:
```

08:74:02:77:13:45 Starting key exchange to mobile 08:74:02:77:13:45, data packets will be dropped

```
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.980:
```

08:74:02:77:13:45 Sending EAPOL-Key Message to mobile 08:74:02:77:13:45

state INITPMK (message 1)

```
, replay counter 00.00.00.00.00.00.00.00
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.980: 08:74:02:77:13:45 Reusing allocated memory for EAP Pkt for re
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.980: 08:74:02:77:13:45 Entering Backend Auth Success state (id=70)
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.980: 08:74:02:77:13:45 Received Auth Success while in Authenticati
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.980: 08:74:02:77:13:45 dot1x - moving mobile 08:74:02:77:13:45 int
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.983: 08:74:02:77:13:45 Received EAPOL-Key from mobile 08:74:02:77:
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.983:
```

08:74:02:77:13:45 Received EAPOL-key in PTK_START state (message 2) from mobile 08:74:02:77:13:45

```
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.983: 08:74:02:77:13:45 Successfully computed PTK from PMK!!!
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.983: 08:74:02:77:13:45 Received valid MIC in EAPOL Key Message M2!
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 00000000: 30 14 01 00 00 0f ac 04 01 00 00 0f ac 04 01 00 0..
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 00000010: 00 0f ac 01 0c 00 ......
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 00000000: 01 00 00 0f ac 04 01 00 00 0f ac 04 01 00 00 0f ...
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 00000010: ac 01 0c 00 ....
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 08:74:02:77:13:45 PMK: Sending cache add
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 08:74:02:77:13:45 Stopping retransmission timer for mobile 08
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984:
```

08:74:02:77:13:45 Sending EAPOL-Key Message to mobile 08:74:02:77:13:45

state PTKINITNEGOTIATING (message 3),

```
replay counter 00.00.00.00.00.00.00.01
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.984: 08:74:02:77:13:45 Reusing allocated memory for EAP Pkt for re
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988:
```

08:74:02:77:13:45 Received EAPOL-key in PTKINITNEGOTIATING state (message 4) from mobile 08:74:02:77:13:

```
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Stopping retransmission timer for mobile 08
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988:
```

```
08:74:02:77:13:45 0.0.0.0 8021X_REQD (3) Change state to L2AUTHCOMPLETE (4) last state 8021X_REQD (3)


*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Mobility query, PEM State: L2AUTHCOMPLETE
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Building Mobile Announce :
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Building Client Payload:
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Client Ip: 0.0.0.0
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Client Vlan Ip: 172.16.0.136, Vlan mask : 2
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Client Vap Security: 16384
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Virtual Ip: 192.0.2.1
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 ssid: ise-ssid
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Building VlanIpPayload.
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 0.0.0.0 L2AUTHCOMPLETE (4) DHCP required on
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 Not Using WMM Compliance code qosCap 00
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 0.0.0.0 L2AUTHCOMPLETE (4) Plumbed mobile LW
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988:
```

```
08:74:02:77:13:45 0.0.0.0 L2AUTHCOMPLETE (4) Change state to DHCP_REQD (7) last state L2AUTHCOMPLETE (4)


*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) pemAdvanceState2 6623
*Dot1x_NW_MsgTask_0: Nov 25 16:36:25.988: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) Adding Fast Path rule
 type = Airespace AP - Learn IP address
 on AP 38:ed:18:c6:7b:40, slot 1, interface = 1, QOS = 0
 IPv4 ACL ID = 255, IPv
*apfReceiveTask: Nov 25 16:36:25.989: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) mobility role update requ
 Peer = 0.0.0.0, Old Anchor = 0.0.0.0, New Anchor = 172.16.0.136
*apfReceiveTask: Nov 25 16:36:25.989: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) State Update from Mobility
*apfReceiveTask: Nov 25 16:36:25.989: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) pemAdvanceState2 6261, Ad
*apfReceiveTask: Nov 25 16:36:25.989: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) Replacing Fast Path rule
 type = Airespace AP - Learn IP address
 on AP 38:ed:18:c6:7b:40, slot 1, interface = 1, QOS = 0
 IPv4 ACL ID = 255,
*apfReceiveTask: Nov 25 16:36:25.989: 08:74:02:77:13:45 0.0.0.0 DHCP_REQD (7) Successfully plumbed mobi
*pemReceiveTask: Nov 25 16:36:25.990: 08:74:02:77:13:45 0.0.0.0 Added NPU entry of type 9, dtlFlags 0x0
*pemReceiveTask: Nov 25 16:36:25.990: 08:74:02:77:13:45 0.0.0.0 Added NPU entry of type 9, dtlFlags 0x0
*apfReceiveTask: Nov 25 16:36:27.835: 08:74:02:77:13:45 WcdbClientUpdate: IP Binding from WCDB ip_learn
*apfReceiveTask: Nov 25 16:36:27.835: 08:74:02:77:13:45 IPv4 Addr: 0:0:0:0
*apfReceiveTask: Nov 25 16:36:27.835: 08:74:02:77:13:45 In apfRegisterIpAddrOnMscb_debug: regType=1 Inv
*apfReceiveTask: Nov 25 16:36:27.835: 08:74:02:77:13:45 IPv4 Addr: 0:0:0:0
*apfReceiveTask: Nov 25 16:36:27.840: 08:74:02:77:13:45 WcdbClientUpdate: IP Binding from WCDB ip_learn
*apfReceiveTask: Nov 25 16:36:27.841:
```


```
08:74:02:77:13:45 172.16.0.16 DHCP_REQD (7) Change state to RUN (20) last state DHCP_REQD (7)
```

For an easy way to read debug client outputs, use the *Wireless debug analyzer* tool:

Wireless Debug Analyzer

Authentication process on ISE

Navigate to **Operations > RADIUS > Live Logs** in order to see which authentication policy, authorization policy and authorization profile assigned to the user.

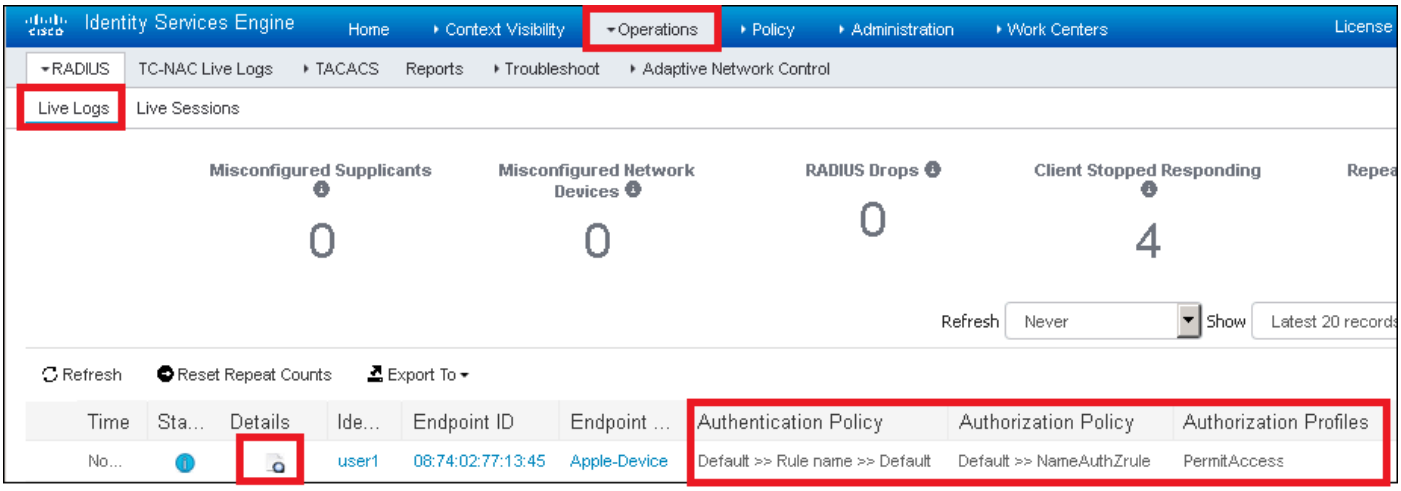

For more information click on **Details** to see a more detailed authentication process.