Release Notes for Cisco Routed PON, Cisco IOS XR Release 24.1.1, 24.1.2

First Published: 2024-03-14

Last Modified: 2024-06-14

Cisco Routed PON Solution on Cisco IOS XR Release 24.1.1, 24.1.2

This consolidated release note covers the new features and updates for Cisco Routed PON in Cisco IOS XR release 24.1.1 and 24.1.2.

For more details on the Cisco IOS XR release model and associated support, see Guidelines for Cisco IOS XR Software.

Cisco Routed PON Overview

With the advancements in broadband technology, the customer demands have expanded to high-resolution audio and video playback, seamless audio and video streaming, immersive Virtual Reality (VR) experiences, and responsive gaming. These technologies require high bandwidth with low latency to function smoothly. Today this is achieved with the help of a large Optical Line Terminal (OLT) chassis that connects at the access layer within the network infrastructure.

Cisco Routed PON Solution is a transformational approach that condenses the OLT chassis into a pluggable form factor. The solution becomes a part of the access router by plugging the Cisco PON SFP+ into 10G ports of NCS540, NCS5500, and NCS5700 series routers. You have the option to use a scalable model based on your bandwidth requirements, choosing between PON pluggable optics or Ethernet optics for your requirements.

The Cisco Routed PON eliminates the dedicated PON chassis, which removes vendor lock-in due to proprietary hardware and software. The OLT tranceiver SFP not only costs less than the PON chassis, but also doesn’t require additional power supply and rack space. This solution enables you to adopt a scalable 'pay-as-you-grow' approach, allowing you to incrementally select and add the necessary hardware enhancements to accommodate your increasing bandwidth requirements over time. Some other benefits of the Cisco Routed PON solution are:

- Compatible with non-proprietary ONTs
- Enhanced income generation through a network focused on service delivery
- Accelerated deployment of new services to the marketplace
- Maximized efficiency in fiber bandwidth usage


The Cisco IOSXR Release 24.1.1 supports the PON Controller on the following Cisco router variants:

- N540-24Z8Q2C-SYS
- N540-ACC-SYS
- N540X-16Z4G8Q2C-A, N540X-16Z4G8Q2C-D

- N540-28Z4C-SYS-A, N540-28Z4C-SYS-D
- N540-24Q8L2DD-SYS
- NCS-55A1-24Q6H-SS
- NCS-55A2-MOD-S
- NCS-57C1-48Q6D

Cisco Routed PON Architecture

Figure 1: Cisco Routed PON Architecture

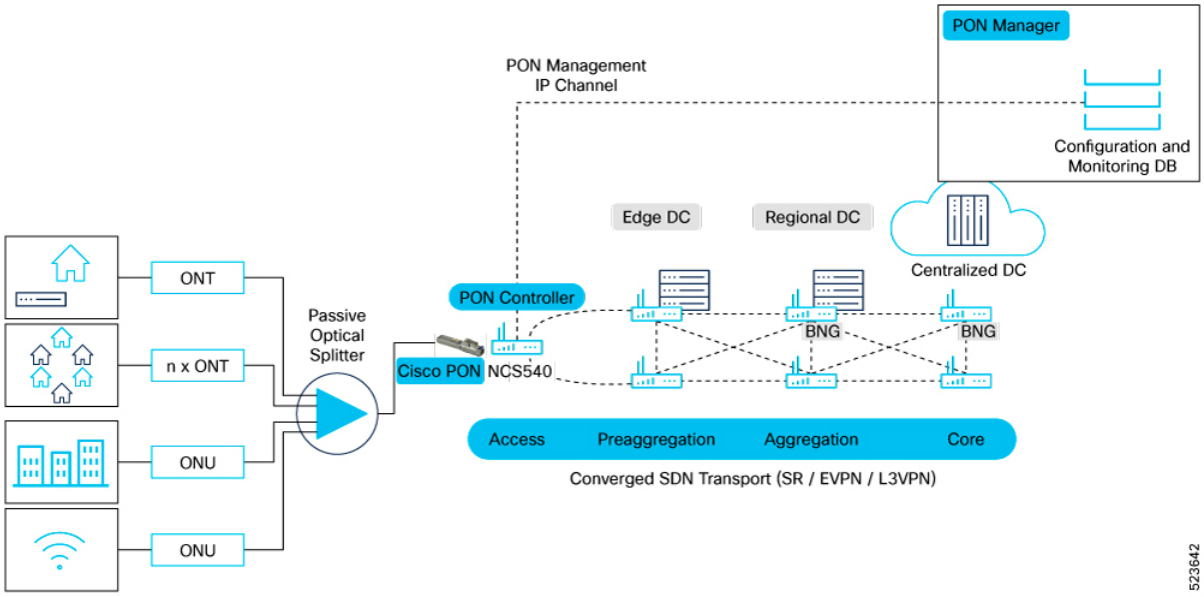

As shown in the illustration, the Cisco PON pluggable OLT is inserted into the SFP+ ports on the routers. The PON Manager is a Graphical User Interface (GUI) web page used to provide a user-friendly interface for monitoring and managing the network. The PON controller provides a secure communication channel between the PON manager and the OLTs and ONUs. These three components of the solution are discussed in detail below.

Components of the Cisco Routed PON Solution

The various components of the Cicso Routed PON solution are:

Cisco PON pluggable OLT - The Cisco PON pluggable OLT is designed for software-defined broadband network deployment and comes in a hot-pluggable SFP+ form factor. This module is equipped with an integrated chip that enables connection from a PON network to a point-to-point Ethernet SFP+ port located on routers. It supports symmetric 10G upstream and downstream rates.

Cisco PON Controller - The Cisco PON controller serves as a device driver and management application that is stateless, tasked with the configuration and supervision of endpoints within a PON network. This lightweight application is deployable as a Docker container and is compatible with the NCS540, NCS5500, and NCS5700 series routers.

Cisco PON Manager - The Cisco PON manager consists of a web-based application along with an associated REST API, which together offers a graphical user interface to oversee the PON network. The REST API is designed to facilitate access to MongoDB, enabling the management of both PON users and the PON network.

MongoDB database - The MongoDB database stores and manages the configuration and operational state of the PON network. MongoDB acts as a middle layer between the PON Manager and the PON Controller. The REST API provided by the PON Manager is designed to facilitate access to the operational state maintained in MongoDB, thus enabling the management of both the PON subscribers and the PON network.

What's New in Cisco Routed PON for Cisco IOS XR 24.1.2

Software Features Introduced

In Cisco IOS XR Release 24.1.2 release for Cisco NCS 540 Series routers, there are no new software features introduced.

Hardware Introduced

In Cisco IOS XR Release 24.1.2 release for Cisco NCS 540 Series routers, there is no new hardware introduced.

What's New in Cisco Routed PON for Cisco IOS XR 24.1.1

Software Features Introduced

This is the first release of Cisco Routed PON for Cisco IOS XR Release 24.1.1 release.

For more details on the features of Cisco Routed PON, see Cisco Routed PON Overview, on page 1.

Hardware Introduced

Table 1: Hardware Introduced with Cisco IOS XR 24.1.1 Release

Hardware	Release	Description
Cisco PON OLT SFP	24.1.1	This release supports configuration and management of the **Cisco PON OLT SFP** transceiver on the following Cisco NCS 540, 5500, and 5700 Series Routers: • N540-24Z8Q2C-SYS • N540-ACC-SYS • N540X-16Z4G8Q2C-A, N540X-16Z4G8Q2C-D • N540-28Z4C-SYS-A, N540-28Z4C-SYS-D • N540-24Q8L2DD-SYS • NCS-55A1-24Q6H-SS • NCS-55A2-MOD-S • NCS-57C1-48Q6D The transceiver module plugs into the 10G port on the Router. The combination of the transceiver, PON Manager, PON Controller, and the MongoDB creates a network management solution for monitoring and managing OLTs and ONU devices in the network. With the help of the transceiver, the router functions as an OLT, this removes the requirement of a separate OLT Chassis.

Restrictions and Limitations on the Cisco Routed PON Solution

- IEEE 802.1X (Dot1x) authentication is not supported for the Cisco OLT interface.

Caveats

Caveats on Cisco IOS XR Release 24.1.2

Resolved Caveats

Bug ID	Headline
CSCwj26208	PON ONU's may not get detected post software activation

Open Caveats

There are no open caveats in this release.

Caveats on Cisco IOS XR Release 24.1.1

Resolved Caveats

As this is the first release on Cisco Routed PON there are no resolved caveats in this release.

Open Caveats

Bug ID	Headline
CSCwj26208	PON ONU's may not get detected post software activation

Related Documentation

The documentation related to installation and management of the Cisco Routed PON Solution is as follows:

Document Name	Description
Cisco Routed PON Deployment Guide	Refer to this document understand and deploy the Cisco Routed PON solution.
Cisco Routed PON Installation Guide	Refer to this document to install the various components of the Cisco Routed PON solution such as the PON Manager, the MongoDB database, and the PON Controller. This document also contains various sizing requirements for the components along with the complete steps to install the components.
Cisco Routed PON Manager User Guide	Refer to this document to understand the configuration, security features, and usage information for the PON Manager.
Cisco Routed PON REST API Developer Guide	Refer to this document to understand the architecture and design of the Application Programming Interface (API), the structure of the REST endpoints, request, and response formats, and reference and usage information for the REST API.
Cisco Routed PON Whitepaper	Refer to this document to understand Cisco's approach to the Routed PON Solution.
Cisco 10G Routed PON Modules Data Sheet	Refer to this document for the product specifications, dimensions, and warranty information of the Cisco Routed PON.

Document Name	Description
Cisco Routed Passive Optical Network Controller Vulnerabilities	Refer to this document for information on vulnerabilities related to the Cisco Routed PON Controller.

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED “AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: https://www.cisco.com/c/en/us/about/legal/trademarks.html. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2024 Cisco Systems, Inc. All rights reserved.