

Monitor Faults


This chapter describes the tasks to view alarms and create alarm profiles.

- Fault Monitoring, on page 1
- View rack, chassis, or card alarms, on page 2
- View all alarms and conditions, on page 3
- View rack, chassis, or card transient conditions, on page 4
- View alarms history, on page 4
- Alarm profiles, on page 5

Fault Monitoring

The Fault Monitoring panel displays a summary of all encountered alarms and conditions. It displays the number of Critical (CR), Major (MJ), Minor (MN), Warnings (W), and Non-applicable (NA) alarms. It displays the alarms, transient conditions, and historical alarms that are related to chassis, passive devices, pluggables, line cards, amplifier cards, and control cards. You can also create custom alarm profiles and apply them on the node using this pane.

Figure 1: Fault Monitoring

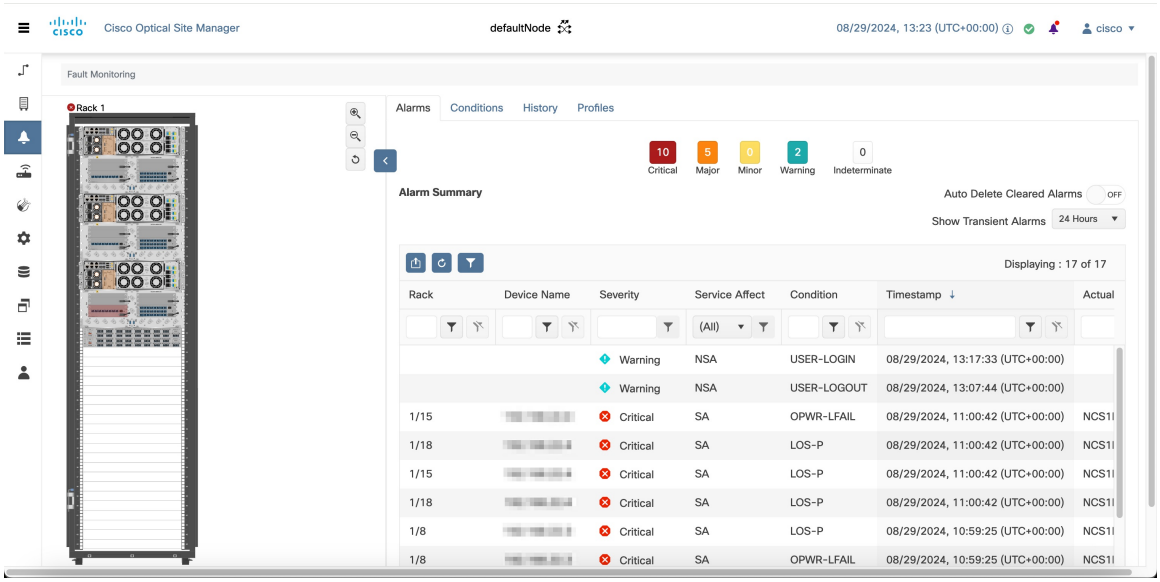

Note The Cisco Optical Site Manager UI begins capturing XR alarms only after the Cisco Optical Site Manager package is activated. As a result, any alarms generated on the device before this activation are not synchronized with the Cisco Optical Site Manager UI. This leads to a discrepancy where the IOS-XR CLI may show a more complete set of alarms compared to what is available in the Cisco Optical Site Manager UI.

View rack, chassis, or card alarms

You can view the alarms raised on a rack, chassis, or card from the Alarms tab.

Follow these steps to view the alarms raised on a rack, chassis, or card.

Before you begin

Log into Cisco Optical Site Manager

Procedure

Step 1 Click **Topology** in the left panel.
The **Topology** page appears.

Step 2 Perform one of the following steps to view alarms for a rack, chassis or card:

- Click the rack name from the Rack view to view alarms for a rack.
- Right-click the chassis screws from the Rack view and select **Open** to view alarms for a chassis.
- Right-click the card from the Rack view and select **Open** to view alarms for a card.

The **Alarms** tab displays alarms with various severities, each indicated by a different color:

- Critical
- Major
- Minor
- Warning
- Intermediate

Step 3 (Optional) Select a sepcific time slot from the **Show Transient Alarms** drop-down list to view alarms for a specific time slot.

Step 4 (Optional) Click the **Auto Delete Cleared Alarms** toggle button to automatically delete the cleared alarms.

Step 5 (Optional) Click the **Excel Export** button to export and download the alarms to an Excel sheet.

You can view, filter, manage, and export alarms by severity for specific racks, chassis, or cards.

View all alarms and conditions

Use this task to display, filter, and export alarms and transient conditions in Cisco Optical Site Manager (COSM). This task helps you identify system issues and confirm component health across the managed site.

- Inspect active alarms and transient conditions for system components.
- Export alarms for reporting or archival purposes.
- Enable or disable automatic deletion of cleared alarms as required.

Note Cisco Optical Site Manager relies on the default IOS XR syslog format for alarm, event, and notification processing. To ensure proper network monitoring and management, RFC 5424 syslog formatting must not be enabled on devices managed by Cisco Optical Site Manager.

The alarms view aggregates notifications from racks, chassis, cards, and ports. Use it to monitor severity, age, and history of alarmed conditions across the site.

Before you begin

- Log into Cisco Optical Site Manager

Follow these steps to view all alarms and transient conditions:

Procedure

Step 1 Click **Fault Monitoring** in the left panel.

Alternatively, click the bell icon in the top-right corner to open the alarms view.

Step 2 Click the **Alarms** tab to view all active alarms.

Alarms are shown with severities such as Critical, Major, Minor, Warning, and Intermediate. Each severity is indicated by a distinct color.

Step 3 Click the **Conditions** tab to view transient conditions.

Step 4 Click the **History** tab to review historical alarm events and cleared alarms.

Step 5 (Optional) Toggle **Auto Delete Cleared Alarms** to automatically remove cleared alarms from the list.

When enabled, cleared alarms are removed automatically according to the UI setting; when disabled, cleared alarms remain visible in the History view for manual review.

Step 6 (Optional) Click **Excel Export** to export the currently displayed alarms to an Excel file.

Use the exported sheet for reporting or offline analysis.

The Alarms tab lists active alarms with details such as severity, timestamp, source component, and a brief description. The Conditions tab lists transient conditions and the History tab shows historical alarm events and cleared alarms.

Use exported alarm data for diagnostics, reporting, or to correlate events with device-side logs.

View rack, chassis, or card transient conditions

View transient conditions on network components such as racks, chassis, and cards. You can download these conditions to an Excel report for further analysis.

Follow these steps to view transient conditions that include standing or transient notifications on the network, node, or card.

Before you begin

Log into Cisco Optical Site Manager

Procedure

Step 1 Click **Topology** in the left panel.
The Topology page appears.

Step 2 Perform one of the following steps to view the transient conditions:

If you want to view the ...	then
transient conditions for a rack	click the rack name.
transient conditions for a chassis	right-click the chassis screws and select **Open**.
transient conditions for a card	right-click the card and select **Open**.

Step 3 Click the **Conditions** tab.

Step 4 Select a time slot from the **Show Transient Alarms In** drop-down list to view transient conditions for a specific time slot.

Step 5 (Optional) Click the **Excel Export** button to export the transient conditions to an Excel sheet.

View alarms history

View the alarms history to track and analyze past network issues for effective troubleshooting and trend identification.

Follow these steps to display the alarms history raised on a rack, chassis, or card.

Procedure

Step 1 Click **COSM Topology** in the left panel.
The COSM Topology page appears.

Step 2 Perform one of the following steps to view the alarms history:

If you want to ...	then
view alarms history for a rack	click the rack name from the rack view.
view alarms history for a chassis	right-click the chassis screws from the rack view and select **Open**.
view alarms history for a card	right-click the card from the Rack view and select **Open**.

Step 3 Click the **History** tab.

The alarms are displayed with various severities, each indicated by a different color:

- Critical
- Major
- Minor
- Warning
- Intermediate

Step 4 (Optional) Click the **Excel Export** button to export the alarms hisyory to an Excel sheet.

Alarm profiles

An alarm profile enables you to customize alarm severities by creating unique profiles for individual components such as ports, cards, chassis, passive units, optical cross-connects, and optical interfaces.

Cisco Optical Site Manager includes two predefined alarm profiles:

- Default profile
- All suppressed alarms profile

Default profile

The *Default* profile serves as the baseline for alarm severities and provides a standardized configuration for all alarms:

- The default alarm profile is preprovisioned on the node and contains all alarms.


- It sets alarm severities according to standard Telcordia GR-474-CORE guidelines, which cannot be changed.
- Default severities are applied to all alarms and conditions until a new custom profile is created and applied.
- Example of inheritance: A card with an inherited alarm profile adopts the severities applied at the node level.
- Different profiles can be applied at various levels (e.g., node, card, port). You could use the Default profile on a node, cards, and ports, but apply a custom profile to downgrade alarms on a specific card.

All suppressed alarms Profile

The *all-suppressed-alarms* profile focuses on alarms that are intentionally excluded from monitoring and management:

- The profile includes all alarms that are suppressed.
- It is helpful for troubleshooting by excluding non-critical alerts.
- When applied, the profile ensures that suppressed alarms do not affect the monitoring process.

Figure 2: Alarm Profiles

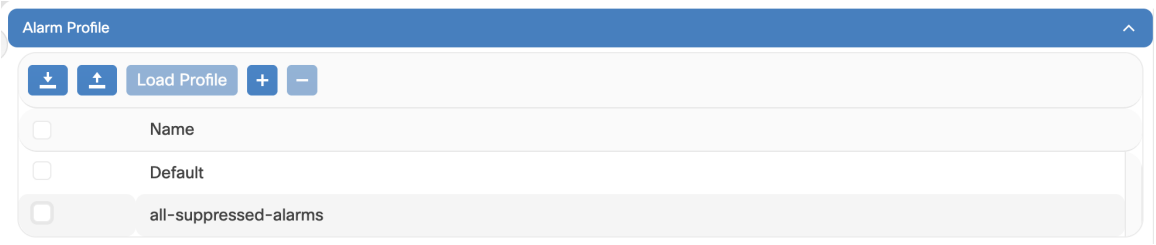

Customizing alarm profiles

Alarm profiles offer flexibility by allowing users to apply different profiles at various levels of the network hierarchy, enabling tailored alarm management.

- **Default Behavior:** Default severities remain active for all alarms and conditions until a new profile is created and applied.
- **Flexible Application:** Alarm profiles can be applied at different levels of the network hierarchy, providing flexibility in alarm management. For example, the default profile can be used for the node, cards, and ports, while a custom profile may be applied to downgrade alarms on a specific card.
- **Severity Modification:** When modifying an alarm profile, all Critical (CR) or Major (MJ) severity settings—whether default or user-defined—are demoted to Minor (MN) in Non-Service-Affecting (NSA) settings, and vice versa, as per Telcordia GR-474 standards.

Create and load alarm profiles

Using alarm profiles helps streamline fault monitoring and reduce alarm noise, making it easier to focus on critical issues in the network.

Follow these steps to create and load alarm profiles a node.

Before you begin

Log into Cisco Optical Site Manager

Procedure

Step 1 Click **Fault Monitoring** in the left panel.

Step 2 Click the **Profiles** tab.

Step 3 Click **Alarm Profile** to expand the section.
The default profile **all-suppressed alarms** is displayed along with the list of alarms.

Step 4 Click the + button to create an alarm profile.

The **Alarm Profile** dialog box appears.

Step 5 Enter the name of the custom alarm profile in the **Name** field.

Step 6 (Optional) Choose the resources such as card, ecu, and fan-tray from the **Resources** drop-down list.

You can select multiple resouces from the list.

Step 7 Click **Apply**.

The alarm profile is created and displayed in the list along with the default alarm profile.

Step 8 Select the check-box corresponding to the alarm profile and click **Load Profile** to load the alarm profile on the node.

The alarms that belong to the selected alarm profile appear in the **Alarms for Profile** sub-section.

Associate alarm profiles

Log into Cisco Optical Site Manager

Associate custom alarm profiles with the resources, such as ports, cards, chassis, passive units, optical cross-connects, and optical interfaces, to customize alarm severities.

Follow these steps to associate alarm profiles with resources: ports, cards, chassis, passive units, optical cross-connects, and optical interfaces.

Procedure

Step 1 Click **Fault Monitoring** in the left panel.

Step 2 In the **Profiles** tab, click **Profile Association** to expand the section.

Step 3 Follow these steps to create a profile association:

a) Click the + button.
The **Profile Association** dialog box appears.

b) Type the name of the profile association in the **Association** field.

c) Select the alarm profile from the **Profile** drop-down list and click **Apply**.
The association name and profile are displayed in the table.

Step 4 Click the + button to expand the association name.

Step 5 Follow these steps to create a resource type:

a) Click the + button above the *Resource Type* column to create a resource type.

The **Resource** dialog box appears.

b) Select a resource from the **Resource Type** drop-down list:

The **Resource Type** drop-down list contains all the resources to which the alarm profile can be associated. Multiple resources can be associated with the same alarm profile.

c) Select any of these options from the **Inherited** drop-down list.

- **true** - To indicate if the association should be applied to all the children of this resource.
- **false** - To indicate if the association should not be applied.

d) Select the desired values from the other drop-down lists and click **Apply**.

When the alarm profile is associated with the resources, all the outstanding and new alarms matching these resources are immediately set with the new alarm severities.