

Open Ports


- Information About Open Ports (Wireless), on page 1

Information About Open Ports (Wireless)

This chapter lists the connector ports that need to be open for the proper functioning of various services or protocols.


These ports need to be opened to allow for the basic functionality of Cisco Spaces.

Figure 1: Basic Functionality

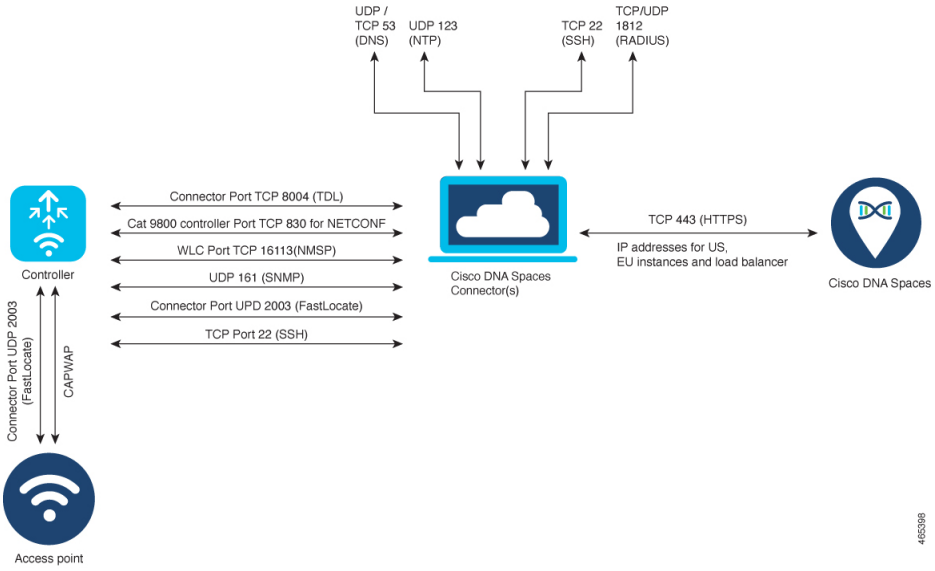

In addition to basic functionality, additional ports need to be opened for other additional functionality like guest onboarding and IoT Services.

Figure 2: Guest Onboarding

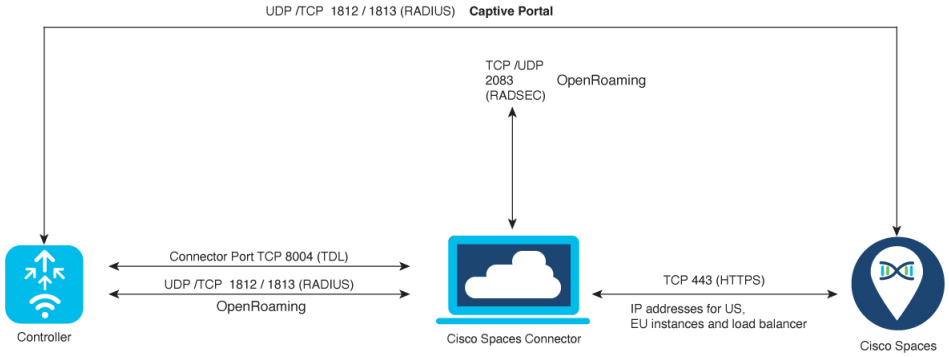

These ports need to be opened for configuring IoT Services (wireless). To configure IoT Services (wired), refer to Open Ports (Wired).

Figure 3: IoT Services

