

# Secure Group Tag-based Access Control


- Feature Summary and Revision History, on page 1
- Feature Description, on page 2
- How it Works, on page 4
- Viewing Fastpath Stream Details, on page 4
- User Access Control through SGACL, on page 5
- How SGACL for ISE Integration Works, on page 7
- Secondary ISE server integration on UPF, on page 11
- SGACL Configuration for ISE Integration, on page 14
- Monitoring and Troubleshooting, on page 18


# Feature Summary and Revision History

## Summary Data

***Table 1: Summary Data***

| | |
|---|---|
| Applicable Products or Functional Area | 5G-UPF |
| Applicable Platforms | VPC-SI |
| Feature Default Setting | Enabled–Always-on |
| Related Changes in this Release | Not Applicable |

## Revision History

| Revision Details | Release |
|---|---|
| First introduced. | 2023.02.0 |

# Feature Description

*Table 2: Feature History*

| Feature Name | Release Information | Description |
|---|---|---|
| Security Group Tag for Cisco Identity Service Engine (ISE) Integration on UPF | 2023.03 | To support the additional RADIUS attributes, UPF supports ISE integration for handling the Security Group Tag (SGT) received from SMF. The SMF receives the SGT from the RADIUS server. Then, the SMF sends the SGT over the Sx or N4 interface to UPF during Session Establishment Request.<br><br>The creation of SGT is according to the static policy on Cisco ISE or SMF and the UPF requires inserting the SGT into the CMD header on uplink packets.<br><br>**Default Setting**: Not Applicable |
| User Access Control through Secure Group Tag-based Access Control List (SGACL) | 2024.03.0 | UPF supports Cisco ISE integration for SGACL enforcement on the downlink packets.<br><br>UPF fetches the SGACL matrix from ISE through an API query based on the Destination SGT (D-SGT). The D-SGT is received over Sx or N4 interface from SMF. Then, UPF applies the SGACLs based on the the D-SGT and Source SGT (S-SGT) mapping on the downlink packets. Hence, the policy enforcement from Cisco ISE is enabled.<br><br>Cisco ISE, as a centralized policy engine, provides a unified policy management experience for the other Cisco packet core elements.<br><br>This feature introduces the new CLI commands **ise-server-profile** *profile_name* to define the ISE server profile and **associate ise-server-profile name***server_profile_name* to associate the ISE server profile within a UPF service.<br><br>**Default Setting**: Disabled – Configuration Required to Enable |

The Security Group Tag (SGT) specifies the privileges of a traffic source within a trusted network. Security Group Access, which is a feature of both Cisco TrustSec and Cisco ISE, automatically generates the SGT when a user adds a security group in TrustSec or ISE.

**Note** Security Group Tag (SGT) is also referred to as Scalable Group Tag.

The Identity Services Engine (ISE) sends SGT values over the RADIUS interface, that are propagated over the N6 interface. The SGT value needs to be checkpointed for both session recovery and ICSR/GR scenarios for availability to the peer session manager.

# Cisco ISE

Cisco Identity Services Engine (ISE) is a centralized policy management platform that provides secure network access to end users and devices. The Cisco ISE server enables the creation and enforcement of security and access policies for endpoint devices that are connected to the routers and switches of an enterprise.

Having Cisco ISE as a centralized policy engine helps in unified policy management experience for the other Cisco packet core elements.

- VLAN segmentation—VLAN segmentation is beneficial in the following aspects:
  - Security—Security Groups that have sensitive data are separated from the rest of the network, decreasing the chances of confidential information breaches.
  - Cost reduction—Cost savings result from the reduced need for expensive network upgrades and more efficient use of the existing network bandwidth.
  - Improved network performance—Dividing Layer 2 networks into multiple logical workgroups reduces unnecessary traffic on the network and boosts performance. VLANs enable the implementation of access and security policies according to specific groupings of users.

# Security Group Tag

The Security Group Tag (SGT), also referred to as the Scalable Group Tag, specifies the privileges of a traffic source within a trusted network. Security Group Access, which is a feature of both Cisco TrustSec and Cisco ISE, automatically generates SGT when you add a security group in TrustSec or ISE.

To support SGT for ISE integration:

- SMF receives the SGT from the ISE server.
- SMF updates the SGT towards the UPF using the N4 extensions.
- UPF identifies the device packets and applies the corresponding SGT to the N6 packets.

The SGT has the following values as the Security Group Tag-based Access Control List (SGACL) enforcement is done for the downlink traffic:

- Destination SGT (D-SGT)—The SGT value that UPF receives per subscriber session over the Sx or N4 interface from SMF in the Session Establishment Request. The SMF fetches this information from ISE server over the RADIUS interface.
- Source SGT (S-SGT)—The SGT value that is received in the CMD header of a downlink packet. A wireless LAN controller (WLC) or an access switch inserts this value.

The Identity Services Engine (ISE) sends D-SGT values over the RADIUS interface that are propagated over the N6 interface. The D-SGT value needs to be checkpointed for session recovery and ICSR based recovery.

When the user access control through the SGACL feature is enabled and a subscriber session receives a D-SGT, the SGACL is applied to the downlink packets. The SGACL is applied based on the D-SGT and S-SGT mapping.



**Note** In this case, the APN ACL isn't applied to these sessions.

## Security Group Tag-based Access Control List

Security Group Tag-based Access Control List (SGACL) is an Access Control List (ACL) that controls and manages the authorization of the security group members. SGACLs create SGACL policies, which are represented through an SGT matrix.

## Security Group Tag Matrix

SGACLs create SGACL policies. Security Group Tag matrix (SGT matrix), also referred to as permissions matrix, represent these policies in the TrustSec domain. This SGT matrix includes the security group numbers and destination security group numbers. This matrix describes how two endpoints communicate. The applicable policies are Permit and Deny. The contents of SGT matrix and SGACLs are downloaded from ISE server using the REST API.

UPF inserts the D-SGT value for the outgoing uplink packets sent over the N6 interface. UPF receives the S-SGT value for the downlink packets over the N6 interface. This S-SGT value is used for the matrix lookup and is removed while sending the outgoing downlink packets over the N3 interface.

Based on the mapping between the Destination SGT (D-SGT) and Source SGT (S-SGT), the policies are enforced at UPF and an appropriate SGACL is enforced on the downlink packets.

## Fastpath Stream

The SGT value that is received in the Session Establishment Request is carried with Outer Header Removal (OHR) option for the uplink stream. This operation enables VPP to add SGT in the corresponding uplink packets towards the N6 interface. The per stream SGT is provisioned in fastpath as part of the **remove-outer-header** operation.

# How it Works

# Viewing Fastpath Stream Details

You can view the fastpath stream details using the **fastpath stream list allinfo** CLI command.

The following is a sample output of this command:

```
vpp# fastpath stream list allinfo

p ~odc qta teid immediate=0xd, 2817:r104354:d14069, 2831:r51892:d51892) Policer,
(Next: V6:254, V4254), (2829:r753755:d753755, 2828:r753755:d753755) Policer,
(Next: V6: 24, V4 25), (2829:r753758:d753758, 2828:r753758:d753758) hcfUL,
(Next: V6: 22, V4 23), (2827:r9964:d9964, 2830:r189893:d189893,
2831:r51892:d51892) remOuterHdr, (Next: V6: 7, V4 7),
(2817:r104354:d14069, immediate=0x2d000120) L1:Sx35b93
holding queue: Empty  x3-index: 0 dep-id: 0 dup-x3-index: 0 dup-dep-id: 0
```

# User Access Control through SGACL

***Table 3: Feature History***

| Feature Name | Release Information | Description |
|---|---|---|
| User Access Control through Secure Group Tag-based Access Control List (SGACL) | 2024.03.0 | UPF supports Cisco ISE integration for SGACL enforcement on the downlink packets. SGACL is an Access Control List (ACL) that controls and manages the authorization of the security group members.<br><br>UPF fetches the SGACL matrix from ISE through an API query based on the Destination SGT (D-SGT). The D-SGT is received over the Sx or N4 interface from SMF. Then, UPF applies the SGACLs based on the D-SGT and Source SGT (S-SGT) mapping on the downlink packets. Hence, the policy enforcement from Cisco ISE is enabled.<br><br>This feature introduces the new CLI commands **ise-server-profile** *profile_name* to define the ISE server profile and **associate ise-server-profile name** *server_profile_name* to associate the ISE server profile within a UPF service.<br><br>**Default Setting**: Disabled – Configuration Required to Enable |

| Feature Name | Release Information | Description |
|---|---|---|
| Security Group Tag (SGT) for Cisco Identity Service Engine (ISE) Integration on UPF | 2023.03 | To support the additional RADIUS attributes, UPF supports ISE integration for handling the SGT received from SMF. The SMF receives the SGT from the RADIUS server. Then, the SMF sends the SGT over the Sx or N4 interface to UPF during Session Establishment Request.<br>The creation of SGT is according to the static policy on Cisco ISE or SMF and the UPF requires inserting the SGT into the Cisco Meta Data (CMD) header on uplink packets.<br>**Default Setting**: Not Applicable |

The Security Group Tag (SGT), also referred to as the Scalable Group Tag, specifies the privileges of a traffic source within a trusted network. Security Group Access automatically generates SGT when you add a security group in TrustSec or ISE. Cisco ISE, as a centralized policy engine, provides a unified policy management experience for the other Cisco packet core elements.

The S-SGT is a 16-bit value that is transmitted in the Cisco Meta Data (CMD) field of a Layer 2 Ethernet Frame. The CMD header is inserted after the ".1Q" tag, if available. If the ".1Q" tag is unavailable, the CMD immediately follows the MAC Source Address.

To support SGT for ISE integration:

- SMF receives the D-SGT from the ISE server.
- SMF updates the D-SGT towards the UPF using the N4 extensions.
- UPF identifies the packets and applies the D-SGT and S-SGT combination to N6 DL packets.

Security Group Tag-based Access Control List (SGACL) is an Access Control List (ACL) that controls and manages the authorization of the security group members. SGACLs create SGACL policies, which are represented through a Security Group Tag matrix (SGT matrix).

The SGT matrix, also referred to as the permissions matrix, represents the SGACL policies in the TrustSec domain. This matrix comprises the security group numbers and destination security group numbers, and describes how the two endpoints communicate. The applicable policies are Permit and Deny. The contents of an SGT matrix and the SGACLs are downloaded from the ISE server using the REST API.

UPF inserts the D-SGT value for the outgoing uplink packets sent over the N6 interface. UPF receives the S-SGT value for the downlink packets over the N6 interface. This S-SGT value is used for the matrix lookup and is removed while sending the outgoing downlink packets over the N3 interface.

Based on the mapping between the Destination SGT (D-SGT) and Source SGT (S-SGT), the policies are enforced at UPF and an appropriate SGACL is enforced on the downlink packets.

UPF supports ISE integration for SGACL enforcement for the downlink packets through the following SGT values:

- Destination SGT (D-SGT)—UPF receives this value per subscriber session over the N4 interface from SMF in the Session Establishment Request. SMF receives the D-SGT from ISE in the RADIUS Access Accept message. For this feature, the SMF must send the SGT to UPF in a proprietary IE on the N4 interface.

- Source SGT (S-SGT)—Is received in the CMD header of a downlink packet. A wireless LAN controller (WLC) or an access switch inserts this value.

The Identity Services Engine (ISE) sends D-SGT values over the RADIUS interface that are propagated over the N6 interface. The D-SGT value needs to be checkpointed for session recovery and ICSR-based recovery.

With the ISE integration for SGACL enforcement feature, the same policy is applied on downlink packets for subscribers with the use of ISE. The communication policies among various source and destination endpoints are managed through Cisco ISE and enforced through UPF.

The policies are enforced at UPF through the Secure Group Tag (SGT) value. UPF inserts the D-SGT value for the outgoing uplink packets. UPF receives the S-SGT value for the downlink packets. This value is used for the matrix lookup and is removed for the outgoing downlink packets. Based on the mapping between S-SGT and D-SGT for a specific downlink packet, an appropriate SGACL is enforced.



**Note**

- SMF receives the D-SGT from ISE in the Access Accept message. For this feature, the SMF must send the SGT to UPF in a proprietary IE on the N4 interface.
- When you enable the user access control through SGACL and a subscriber session receives a D-SGT, then the SGACL is applied to the downlink packets. In this case, the APN ACL isn't applicable to these subscriber sessions.
- When you don't enable the user access control through SGACL or the UPF doesn't receive the D-SGT during the N4 Session Establishment Request, then the APN ACL is applicable as per the existing configuration.

You can define the ISE server profile through the **ise-server-profile** *profile_name* CLI command and associate the ISE server profile within a UPF service through the **associate ise-server-profile name** *server_profile_name* CLI command.


# How SGACL for ISE Integration Works

This section describes how SGACL for ISE integration works.

- SMF fetches the corresponding SGT value from ISE over RADIUS and sent on N4 interface to the UPF.
- Each UPF is registered as a Network Access Device (NAD) in ISE server.
- UPF downloads the SGT Matrix and corresponding SGACLs from ISE server using the REST API. UPF applies the SGACL for flow based on the D-SGT to S-SGT mapping.
- A non-real time update is available through periodic or trigger-based pull from UPF.
- The D-SGT value needs to be checkpointed for session recovery and ICSR-based recovery.


## Call Flow

The following figure illustrates the SGT fetch and SGACL enforcement call flow.

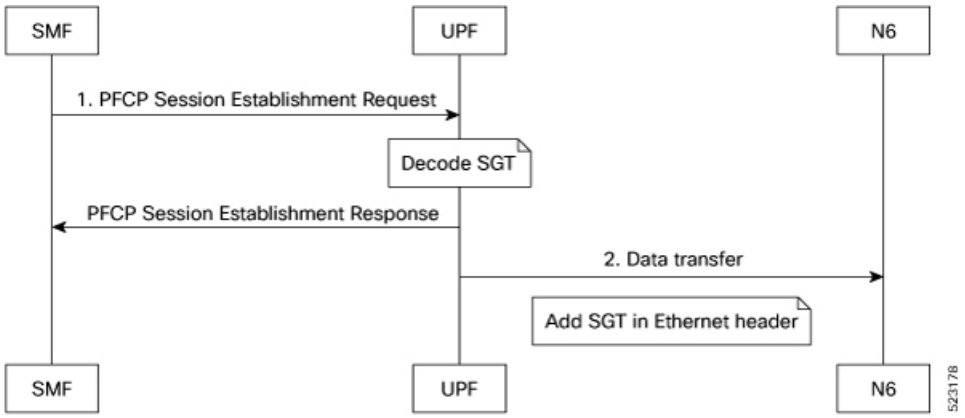


| Step | Description |
|---|---|
| 1 | SMF sends the SGT value in PFCP Session Establishment Request to UPF. |
| 2 | UPF decodes the SGT value and adds this value as part of the Cisco Meta Data (CMD) in Ethernet header for all packets sent over the N6 interface. |

*Figure 1: SGT Fetch and SGACL Enforcement Call Flow*

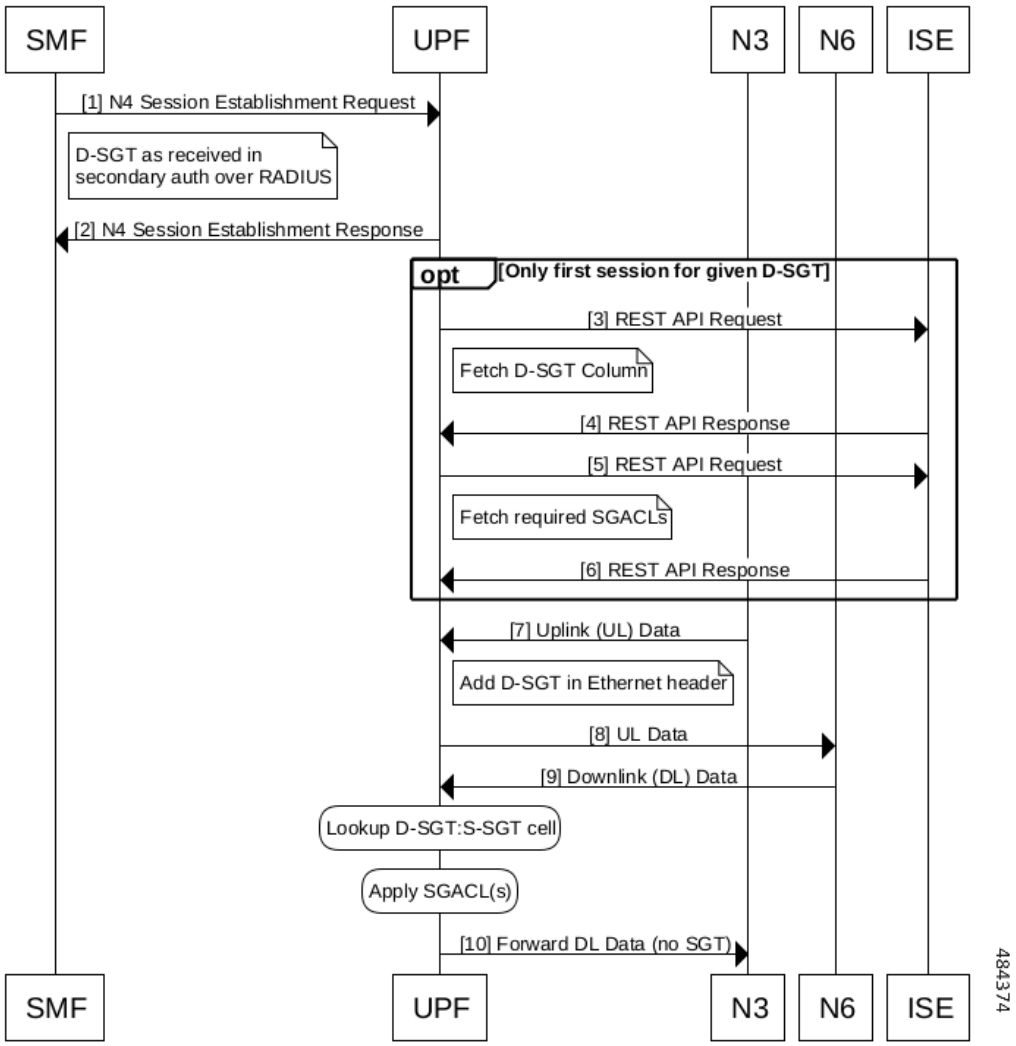


| Step | Description |
|---|---|
| 1 | SMF sends N4 Session Establishment Request to UPF. As part of this request, the UPF receives the D-SGT value from SMF. |
| 2 | UPF sends N4 Session Establishment Response to SMF. |
| 3 | For the first session of a specific D-SGT, UPF sends the REST API Request to the ISE server to fetch the D-SGT column values. |
| 4 | ISE sends the REST API Response to UPF. This response includes the mapped S-SGT values for the D-SGT and the SGACL matrix information containing the SGACL names along with the refresh timer.<br>The SGT matrix cell entries and SGACLs are stored on UPF. Each D-SGT column has a refresh timer that is configured in ISE. |

| Step | Description |
|---|---|
| 5 | UPF sends the REST API Request to the ISE server to fetch the required SGACLs.<br>ISE sends the REST API Response to UPF with the SGACL definitions. |
| 6 | N3 sends the uplink (UL) data to UPF. |
| 7 | UPF adds D-SGT in Ethernet header and sends the UL data to the N6 interface. |
| 8 | N6 sends the downlink (DL) data to the N3 interface. |
| 9 | The UPF checks the D-SGT and S-SGT mapping and applies the SGACLs. |
| 10 | UPF forwards the DL data, with no SGT, to the N3 interface. |

# Limitations

This feature has the following known limitations:

- The PFCP Session Establishment Request must send the D-SGT value over the N4 interface. The D-SGT cannot be changed, but S-SGT can change.
- UPF does not support SGT traffic in the downlink direction.
- As the ACLs can be stacked for a specific SGT-Pair combination, the SGACLs are applied as per the order of ACLs received for a specific SGT-Pair.
- The maximum number of recommended matrix combinations is 150 D-SGT Columns * 150 S-SGT rows, with 255 distinct SGACLs, including the default SGACL.
- The maximum number of SGACLs in a single cell is limited to 16.
- UPF can store only one default SGACL at a time. Hence, when the Default SGACL changes, only the updated SGACLs information is stored on UPF.

# Secondary ISE server integration on UPF

*Table 4: Feature History*

| Feature name | Release information | Description |
|---|---|---|
| Secondary ISE server support on UPF | 2025.03.0 | |

| Feature name | Release information | Description |
|---|---|---|
| | | This feature allows the network operator to integrate a secondary ISE server on UPF.<br><br>The secondary ISE server integration provides a failure mechanism to ensure seamless enforcement of SGACLs when the primary ISE server goes down.<br><br>**Commands enhanced:**<br><br>• **[ secondary-server { ipv4_address** *ipv4_address* **\| ipv6-address** *ipv6_address* **} ]** : This CLI configures the secondary server IP address.<br><br>• **[ secondary username** *user_name* **password** *password* **]** : This CLI configures the secondary username and password.<br><br>• **[ secondary-certificate** *certificate_path* **]**: This CLI configures the secondary certificate path.<br><br>• **[ secondary-ca-certificate** *ca_certificate_path* **]**: This CLI configures the secondary CA certificate.<br><br>• **[ secondary-key** *key_path* **]**: This CLI configures the secondary key path.<br><br>**Commands introduced:**<br><br>• **max-retransmissions** *max_retrans_count* : This CLI configures the maximum number of retries.<br><br>• **retransmission-timeout** *timeout_duration*: This CLI configures the retransmission timeout.<br><br>• **backoff-period** *backoff_duration*: This CLI configures the Backoff period. |

| Feature name | Release information | Description |
|---|---|---|
| | | **Default Settings:**<br>Disabled—Configuration to Enable |

The ISE server is responsible for enforcing policies on UPF. However, at times, the UPF fails to update or refresh the policy due to a service failure on the ISE server, a failure in reaching the ISE server, or ISE server being down.

Integrating a secondary ISE server allows the UPF to maintain the operational state of the policies and ensure seamless policy enforcement.

# How secondary ISE server integration works

### Workflow

These stages outline the process of secondary ISE server support on UPF:

1. UPF marks the primary ISE server as "Active". The active primary ISE server receives all the REST API requests.
2. When the UPF tries to connect with the primary ISE server, however, when the primary ISE server fails to respond, the UPF tries to reconnect as per the configured number of retransmissions and the retransmission timeout.
3. UPF marks the current "Active" server as "Inactive", if the reconnect attempts fail. UPF then marks the secondary ISE server as "Active" as per the configuration. To configure the secondary ISE server, see the Configure ISE Server profile section.

   The network operator can select the active ISE server manually using a CLI.

   For more details on the manual configuration, see the Manual switching to active ISE server section.
4. The currently marked "Active" starts receiving the same REST API requests.
5. UPF applies the default policy or policy unavailable treatment, when it is yet to receive the policies from the ISE server.
6. UPF ensures that the secondary ISE server is not marked "Inactive" recently, before marking a server as "Active". It prevents UPF from a looping issue when both servers are unreachable.

   After detecting failure at the Primary ISE server, if the UPF also detects failure at the Secondary ISE server, or vice versa, the UPF should not retry again to the alternative server. This prevents UPF from trying to reach the ISE servers in a loop.

   UPF controls this behavior using the configured Backoff period.

### Backoff period

While switching from the primary to the secondary ISE server, or vice versa, the UPF gets into a loop, when both the servers are unreachable. To avoid this, the Backoff period is used as a waiting period before UPF tries to connect with the primary or the secondary ISE server.

The Backoff period prevents excessive network traffic and resource usage caused by continuous retry attempts.

The backoff-period is configurable under the ISE server profile.

## Limitations of secondary ISE server integration

These are the known limitations of secondary ISE server integration on UPF:

- ISE server failure is detected only on the next REST API call.
- There is no active monitoring for the health of the primary or secondary ISE server.
- For REST APIs during failover, added latency includes failure detection time (based on retransmission attempts) and connection or reply time from the active ISE server.
- The authentication failures are not expected to trigger a switchover to the secondary ISE server.
- The database synchronization for SGT or SGACLs between primary and secondary ISE servers is assumed, as a switchover can occur between related REST APIs.
- UPF is not responsible for detecting any database version mismatch between the peer servers.
- The periodic or CLI-triggered refresh happens with the current active server, assuming that it is in-sync with the earlier fetched policies.
- UPF will not re-learn existing SGACLs or policies, once the switchover to the active ISE server happens.

  The re-learning adds latency and thus impacts the throughput, since all the flows need to be on-boarded.

# SGACL Configuration for ISE Integration

This section describes the procedures to configure SGACL for ISE integration.

## Enable API Manager

API manager is a facility that enables API request and response integration through REST APIs.



**Note** Enabling the API manager is a prerequisite for SGACL integration.

**Procedure**

**Step 1** Log in to the configuration mode.

**Step 2** Enter the **require apimgr** command.

**Example:**

```
config
   require apimgr
end
```

This CLI command is part of the boot configuration to spawn the new procedure.

### What to do next

1. Configure ISE Server profile
2. Associate ISE Server Profile

# Configure ISE Server profile

These steps help you configure the ISE server profile.

### Before you begin

Before configuring the ISE server profile, you must enable the API manager. To know more about configuring the API manager, see the Enable API manager section.

### Procedure

**Step 1** Use the CLI **[ no ] ise-server-profile** *profile_name* to create an instance of the ISE server profile under the Context EPC mode.

**Example:**

```
[local]UPF1(config)# context EPC
[local]UPF1(config-ctx)# ise-server-profile ise_1
[local]UPF1(config-ctx)#
```

**Step 2** Use the CLI **bind { ipv4-address** *ipv4_address* **| ipv6-address** *ipv6_address***}** to specify the bind IPv4 or IPv6 address.

**Example:**

```
[local]UPF1(config-ctx)# bind ipv4-address 192.0.2.1
[local]UPF1(config-ctx)#
```

**Step 3** Use the CLI **server { ipv4-address** *ipv4_address* **| ipv6-address** *ipv6_address* **} [ secondary-server { ipv4-address** *ipv4_address* **| ipv6-address** *ipv6_address* **} ]** to configure primary ISE server and secondary ISE server.

**Example:**

```
[local]UPF1(config-ctx)# server ipv4-address 192.0.2.254 secondary-server ipv4-address
 198.51.100.1
```

**Step 4** Use the CLI **username** *user_name* **encrypted | password** *password* **[ secondary username** *user_name* **password** *password* **]** to configure the username and password for the primary ISE server and secondary ISE server.

**Example:**

```
[local]UPF1(config-ctx)# username ise1 password cisco1
cisco2secondary username ise2 password  cisco2
[local]UPF1(config-ctx)#
```

**Note**
In the show configuration output, the password will be displayed in the encrypted format.

**Step 5** Configure the certificate, CA certificate, and key for the primary and secondary ISE servers.

a) Use the CLIs **certificate** *certificate_path* **[ secondary-certificate** *certificate_path* **]** to configure the certificate.

**Example:**

```
[local]UPF1(config-ctx)# certificate /root/certificate/client/client.cert.pem
secondary-certificate /root/certificate/client/client2.cert.pem
[local]UPF1(config-ctx)#
```

b) Use the CLIs **ca-certificate** *ca_certificate_path* and **[ secondary-ca-certificate** *ca_certificate_path* **]** to configure the CA certificate.

**Example:**

```
[local]UPF1(config-ctx)# ca-certificate /root/certificate/ca.cert.pem
secondary-ca-certificate /root/certificate/ca.cert2.pem
[local]UPF1(config-ctx)#
```

c) Use the CLIs **key** *key_path* **[ secondary-key** *key_path* **]** to configure keys.

**Example:**

```
[local]UPF1(config-ctx)# key /root/certificate/client/client.key.pem
secondary-key /root/certificate/client/client2.key.pem
[local]UPF1(config-ctx)#
```

**Step 6** Use the CLI **policy-unavailable-treatment [ drop | pass ]** to specify the traffic treatment when the SGACL matrix is unavailable for a particular D-SGT.

**Example:**

```
[local]UPF1(config-ctx)# policy-unavailable-treatment drop
[local]UPF1(config-ctx)#
```

**Step 7** Configure maximum retransmissions, retransmission timeout, and backoff period.

a) Use the CLI **max-retransmissions** *max_retrans_count* to configure maximum retransmissions when a server is unresponsive.

**Example:**

```
[local]UPF1(config-ctx)# max-retransmissions 6
[local]UPF1(config-ctx)#
```

The CLI **max-retransmissions** *max_retrans_count* configures the maximum number of retries from 0 to 15. The default value is 3.

b) Use the CLIs **retransmission-timeout** *timeout_duration* to configure retransmission timeout.

**Example:**

```
[local]UPF1(config-ctx)# retransmission-timeout 4000
[local]UPF1(config-ctx)#
```

The **retransmission-timeout** *timeout_duration* configures the timeout duration before retransmitting the request to ISE server from 1 to 300 seconds. The default value is 3 seconds.

c) Use the CLI **backoff-period** *backoff_duration* to configure the Backoff-period. Save and exit from the current configuration mode.

**Example:**

```
[local]UPF1(config-ctx)# backoff-period 400
[local]UPF1(config-ctx)# exit
```

The CLI **backoff-period** *backoff_duration* configures the duration during which, the retries to the ISE server are held back. The default value is 200 seconds.

### What to do next

After configuring the ISE server profile, you must associate it with an existing user plane service. For more details, see the Associate ISE server profile section.

# Manually switch to active ISE server

These steps allow you to manually switch to the currently active ISE server:

### Before you begin

Before manually switching to the currently active ISE server, configure the Secondary ISE server under the ISE server profile. See Configure ISE Server profile section.

### Procedure

Execute the CLI **select ise-server { primary | secondary}** in the Execution mode to manually switch to the active ISE server.

**Example:**

```
[local]laas-si-setup# select ise-server secondary
```

- Post manual switching, if the UPF receives any outstanding REST API responses from the old active ISE server, UPF processes them.
- All the pending retries go to the ISE server, which received the retry requests.
- The command **select** is a hidden keyword.

# Associate ISE Server Profile

Once defined, associate the ISE server profile with an existing UPF service configuration.

### Before you begin

Configure ISE server profile

### Procedure

**Step 1** Enter the User Plane Service configuration mode.

**Step 2** Associate the defined ISE server profile with an existing UPF service configuration.

**Example:**

```
user-plane-service UPlane1
      associate ise-server-profile name ise_1
  #exit
```

# Refresh D-SGT Column

Each D-SGT column has a refresh timer that is configured in ISE. Based on the refresh timer configuration or through the UPF CLI trigger, the D-SGT column value is fetched from the ISE server again through the REST API query. Based on the API response from ISE, if the version of SGT matrix or SGACL is changed, UPF updates the respective matrix cell or SGACL information locally. The corresponding SGACLs are downloaded after the refresh, as required.

**Before you begin**

1. Configure ISE Server profile
2. Associate ISE Server profile

**Procedure**

**Step 1** Enter the Exec Mode.

**Step 2** Enter the **refresh-sgt-column** *d_sgt* command to trigger the refresh of a D-SGT column by fetching the column values from the ISE server.

**Example:**

```
refresh-sgt-column d-sgt
```

**Note**
Although the CLI returns immediately, the policy download in the background takes some time and hence the refresh completion may also take some time.

The following is an example output of the **refresh-sgt-column** *d_sgt* CLI command where the *d_sgt* value is configured as *65535*.

```
refresh-sgt-column 65535
```

# Monitoring and Troubleshooting

## Verify SGACL with SGT Integration

This section provides information about show commands and their outputs for the SGACL with SGT Integration feature.

### show subscriber user-plane-only full all

The output of this command is enhanced to include the following field:

- **SGT Value**: Displays the SGT value.

### Fastpath Stream

The SGT value received in Establishment Request is carried with OHR (Outer Header Removal) option for the Uplink stream. This operation enables VPP to add SGT in the corresponding Uplink packets towards N6. The per stream SGT is provisioned in fastpath as part of the remove-outer-header operation.

The following is a sample output of the **fastpath stream** command:

```
vpp# fastpath stream list allinfo

p ~odc qta teid immediate=0xd, 2817:r104354:d14069, 2831:r51892:d51892) Policer,
(Next: V6:254, V4254), (2829:r753755:d753755, 2828:r753755:d753755) Policer,
(Next: V6: 24, V4 25), (2829:r753758:d753758, 2828:r753758:d753758) hcfUL,
(Next: V6: 22, V4 23), (2827:r9964:d9964, 2830:r189893:d189893,
2831:r51892:d51892) remOuterHdr, (Next: V6: 7, V4 7),
(2817:r104354:d14069, immediate=0x2d000120) L1:Sx35b93
holding queue: Empty  x3-index: 0 dep-id: 0 dup-x3-index: 0 dup-dep-id: 0
```

## show subscribers user-plane-only full callid *callid_value*

The output of this CLI command is enhanced with the **SGT Value** field for displaying information related to D-SGT for ISE integration on UPF and **SGACL match stats** field for displaying information related to User Access Control through SGACL.

```
show subscribers user-plane-only full callid 00004e3a
   Local SEID      : [0x0004000000000003] 1125899906842627
  Remote SEID     : [0x00000436b7616206] 4633051357702
  State           : Connected

....

  input pkts: 20                                  output pkts: 16
  input bytes: 9246                               output bytes: 11248
  input bytes dropped: 0                          output bytes dropped: 5624
  input pkts dropped: 0                           output pkts dropped: 8

....

  SGT Value: 0x001a

....

QoS-Group Statistics:
QGR Name             Pkts-Down  Bytes-Down Pkts-Up    Bytes-Up   Hits       Match-Bypassed
  FP-Down(Pkts/Bytes)  FP-Up(Pkts/Bytes)
-------------------- ---------- ---------- ---------- ---------- ---------- --------------
  -------------------  -----------------

SGACL Match stats:
ACL Name             Pkts-Down  Bytes-Down Pkts-Up    Bytes-Up   Pkts dropped
-------------------- ---------- ---------- ---------- ---------- -------------
ACL2611                       4       1432          0          0             2
ACL2612                       4       4112          0          0             2
ACL2621                       8       5704          0          0             4
....
```

```
Total subscribers matching specified criteria: 1
```

## show subscribers user-plane-only callid *callid_value* flows full

The output of this CLI command is enhanced with the **Uplink SGT**, **Downlink SGT**, and **Matched SGACL** fields for displaying information related to User Access Control through SGACL.

```
show subscribers user-plane-only callid 00004e21 flows full
  Callid: 00004e21
  Interface Type: Sxab
  IP address: n/a

  Flow ID: 1:1
  Uplink pkts: 1                    Downlink pkts: 1
  Uplink bytes: 1040                Downlink bytes: 40
…
  Downlink Sfp Id: NA
  Uplink SGT: 0xA1
  Downlink SGT: 0xB5
  Matched SGACL: ACL_123
```

## show user-plane-service sgt-column summary

The output of this CLI command shows the summary of all the available D-SGT values on UPF along with their refresh timers as received from the ISE server.

The following example output shows the D-SGT values of **D-SGT Columns fetched** and **D-SGT Version** fields.

```
show user-plane-service sgt-column summary
 D-SGT Columns fetched:
 D-SGT      Version
 ---------------------------------------
 65535         0
   7           0
 Total D-SGT column(s) found: 2
```

## show user-plane-service sgt-column dsgt

The output of this CLI command shows the summary of the SGACL matrix per D-SGT with the respective SGACL mapping per D-SGT and S-SGT, which are received from ISE during the D-SGT query.

The following example output shows the **D-SGT**, **Refresh TimeS-SGT**, **SGACL Name**, **Version**, and **Total SGT column(s) found** fields.

```
show user-plane-service sgt-column dsgt 26

    D-SGT: 26            Refresh Time: 86400
    S-SGT: 1
    SGACL Name           Version
    ---------------------------------------
    ACL2611                              0
    ACL2612                              0

    S-SGT: 2
    SGACL Name                      Version
    ---------------------------------------
    ACL2621                              0

  Total SGT column(s) found: 1
```

## show user-plane-service sgacl name

The output of this CLI command shows the specific SGACLs definition rule lines as received from ISE during the SGACL query.

```
show user-plane-service sgacl name AACL2
 SGACL Name: AACL2
 permit ip
 Total SGACL(s) found: 1
```

## show user-plane-service statistics sgacl all

The output of this CLI command shows the packet match statistics as per SGACL.

```
show user-plane-service statistics sgacl all

ACL Name              Pkts-Down  Bytes-Down Pkts-Up    Bytes-Up   Pkts dropped
--------------------- ---------- ---------- ---------- ---------- -------------
SGACL1-REFRESH2          6           1156       0          0          2
SGACL1-REFRESH1         13           9344       0          0          6
Allow All                0              0       0          0          0

Total SGACL(s) : 3
```

## show user-plane-service statistics drop-counter

The output of this CLI command is enhanced to shows the dropped packets due to the SGACL application.

```
show user-plane-service statistics drop-counter
Packet Drop Data Statistics:
        ------------------------------------------------
...
        FastPath Misc Drops:
            Overload Protection:                    0
            Invalid Client:                         0
            Stream ID 0:                            0
            Invalid Stream ID:                      0
        OHR Mismatch Packet Drops:                  0
       SGACL Packet Drops:                      8
        SGACL No Policy Packet Drops:              2
        No Default SGT cell Packet Drops:          0
```

**Note**

- **No Default SGT cell Packet Drops** is an obsolete counter. The existing design allows packets to be passed only if no default ACL is available.
- The statistics for ISE server REST API request and response are supported.

## show apimgr statistics ise-server

The **show apimgr statistics ise-server** displays the status for ISE servers statistics.

```
[local]qvpc-si# show apimgr statistics ise-server

Ise-Server Connection Statistics:

Server: 10.10.10.30           Current state: Active
Last Inactive Time:          0000:00:00:00:00:00
```

```
Request sent:                          5
Response Success:                      4
Response Fail:                         1

Server: 10.10.10.40           Current state: Inactive
Last Inactive Time:            2025:01:16:12:30:11
Request sent:                          0
Response Success:                      0
Response Fail:                         0
```

# SNMP trap

The trap **ISEServerSwitchoverOccured** is generated every time the UPF switches to another ISE server.

# OAM Support

### Statistics

Following new bulk statistics are supported for the user access control through SGACL feature.

| **SCHEMA: UPF** | |
|---|---|
| **Statistics** | **Description** |
| show user-plane-service statistics sgacl all | The count of the packet match statistics as per SGACL. |
| show user-plane-service statistics drop-counter | The count of the dropped packets due to the SGACL application. |
| show apimgr statistics ise-server | The count of UPFs API interaction with ISE server. |

### Bulk Statistics

Following new bulk statistics are supported for the user access control through SGACL feature.

| **SCHEMA: UPF** | |
|---|---|
| **Statistics** | **Description** |
| downlink-total-pkts-sgacl-matched | Total downlink packets matched against SGACL |
| downlink-total-bytes-sgacl-matched | Total downlink bytes matched against SGACL |
| downlink-total-pkts-sgacl-dropped | Total downlink packets dropped due to SGACL match |
| downlink-total-bytes-sgacl-dropped | Total downlink bytes dropped due to SGACL match |