

Profiles configuration

- Set an Active Discovery profile, on page 1

Set an Active Discovery profile

Set an Active Discovery profile by adding a policy, targetting IP addresses and arranging a schedule.

Procedure


Step 1 On , navigate to Admin > Active Discovery > Profiles.

Step 2 Click the **Create profile** button.

A form to create an Active Discovery profile pops up.


Step 3 Give the profile a name.

Step 4 Select a policy to base the profile on.

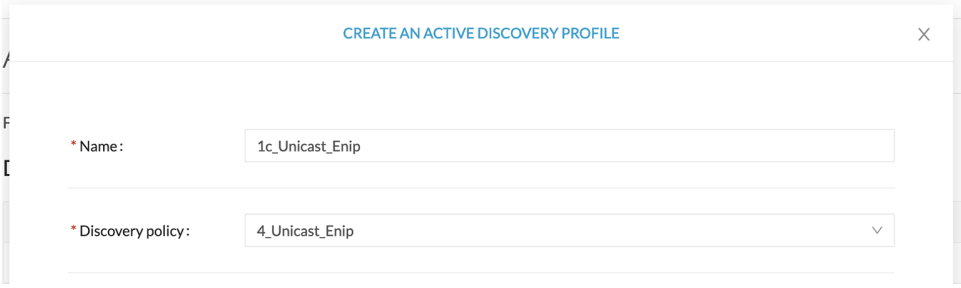

Step 5 Set target IP addresses: different options are available, such as:

- selecting a preset: the preset's device list will be used to list the IP addresses to be queried. In other words, the Active Discovery engine will use the IPv4 inside a component list to build its own list of components to check. You can use default and custom presets.
- setting IP targets: you can directly add the IP adresses, IP ranges and subnets you want to be queried.
- selecting sensors: all IP adresses detected by a sensor will be queried. You can also tick the **Use all sensors available** option.

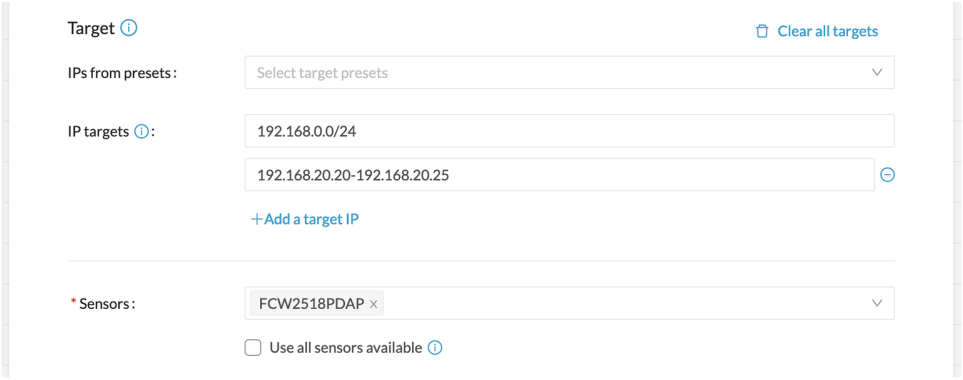

Step 6 Optionally, you can arrange a schedule for Active Discovery to be launched. To do so:


a) Toggle ON the **Schedule periodic discoveries** button.

Additional options to setup appear:

b) Set a time range by selecting a start and end date and time.

The end date and time is optional. If you don't set it, Active Discovery will be launched endlessly.

c) Set a frequency. You can set it to hourly, daily, weekly and monthly.

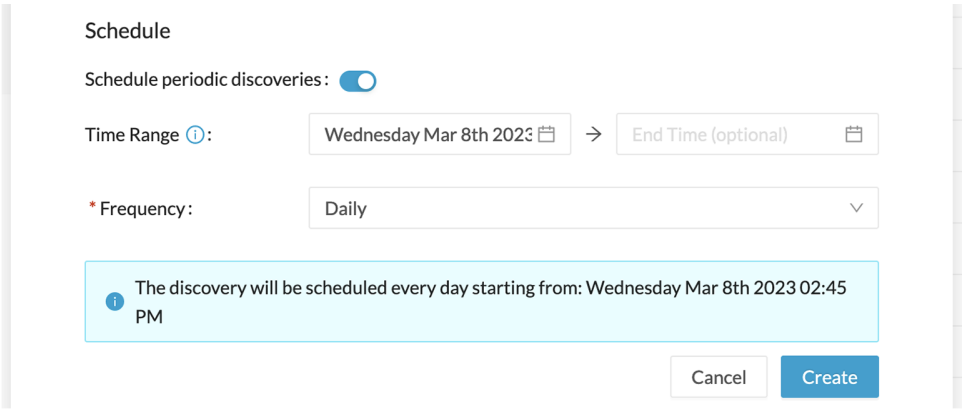

Step 7 Click **Create**.

The profile is added to the list and discovery is enabled by default if scheduling is set.