Comment extraire un email de mbox d'archives ouvre une session l'appliance de sécurité du courrier électronique ?

Contenu

[Introduction](#)
[Comment extraire un email de mbox d'archives ouvre une session l'ESA ?](#)
[Informations connexes](#)

Introduction

Ce document décrit comment extraire un email des logs d'archives créés par l'appliance de sécurité du courrier électronique (ESA).

Comment extraire un email de mbox d'archives ouvre une session l'ESA ?

1. Récupérez le log de mbox d'archives que vous extrairiez l'email de. Comment récupérer le mbox d'archives est disponible dans l'*article* fourni. (https://www.cisco.com/c/en/us/support/docs/security/email-security-appliance/118315-technote-esa-00.html)
2. Ouvrez le fichier d'archivage utilisant l'éditeur de texte. Les exemples ci-dessous sont affichés utilisant *Notepad++*.
3. Identifiez l'email que vous voudriez extraire hors du log d'archives. Chaque email dans les archives commencera par du <address>.
4. Copiez le contenu d'un email simple sur un nouveau fichier texte et sauvegardez-le comme extension **.eml**.
5. Ouvrez l'email extrait dans votre client mail, tel qu'Outlook pour visualiser le contenu.

Note: Un log de mbox d'archives peut contenir de plusieurs emails.

Source d'email témoin dans le log d'archives :

```
From test1@cisco.com Mon Jan 15 08:31:54 2018
X-IronPort-RCPT-TO: test2@cisco.com
Authentication-Results: ironport.example.com; spf=None
smtp.pra=test1@cisco.com; spf=SoftFail smtp.mailfrom=test1
@cisco.com; spf=None smtp.helo=postmaster@LIBIVARG-6622F
Received-SPF: None (ironport.example.com: no sender authenticity
  information available from domain of test1@cisco.com)
  identity=pra; client-ip=10.196.112.18;
  receiver=ironport.example.com;
  envelope-from="test1@cisco.com"; x-sender="test1@cisco.com";
  x-conformance=sidf_compatible
Received-SPF: SoftFail (ironport.example.com: domain of
  test1@cisco.com is inclined to not designate 10.196.112.18 as
  permitted sender) identity=mailfrom; client-ip=10.196.112.18;
  receiver=ironport.example.com;
  envelope-from="test1@cisco.com"; x-sender="test1@cisco.com";
  x-conformance=sidf_compatible; x-record-type="v=spf1"
Received-SPF: None (ironport.example.com: no sender authenticity
  information available from domain of
  postmaster@LIBIVARG-6622F) identity=helo;
  client-ip=10.196.112.18; receiver=ironport.example.com;
  envelope-from="test1@cisco.com";
  x-sender="postmaster@LIBIVARG-6622F";
  x-conformance=sidf_compatible
Received: from unknown (HELO LIBIVARG-6622F) ([10.196.112.18])
  by ironport.example.com with ESMTP; 15 Jan 2018 08:31:54 +0530
MIME-Version: 1.0
From: test1@cisco.com
To: test2@cisco.com
Date: 15 Jan 2018 11:16:23 +0530
Subject: Test archive filter
Content-Type: multipart/mixed; boundary="--boundary_0_
05c6bfa8-119c-40df-b0e9-917b1ffc110e

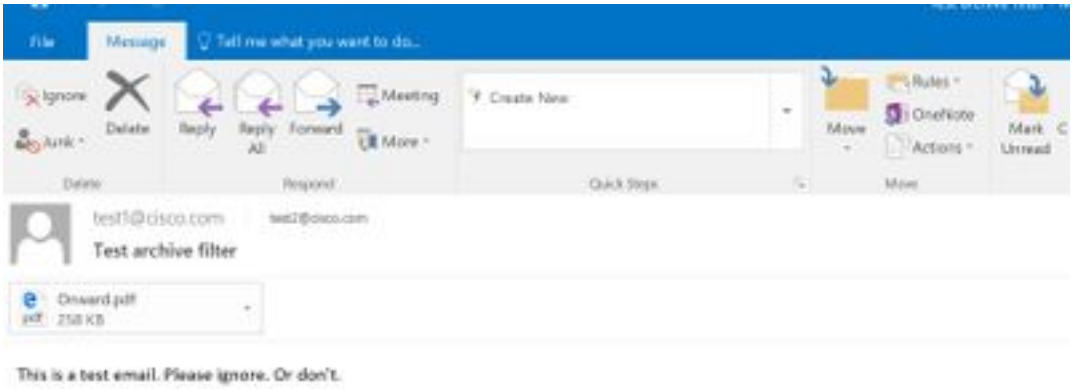

----boundary_0_05c6bfa8-119c-40df-b0e9-917b1ffc110e
Content-Type: text/plain; charset=us-ascii
Content-Transfer-Encoding: quoted-printable

This is a test email. Please ignore. Or don't.
----boundary_0_05c6bfa8-119c-40df-b0e9-917b1ffc110e
Content-Type: application/octet-stream; name=Onward.pdf
Content-Transfer-Encoding: base64

Q29udGVudC1UeXBlOiBtdWx0aXBhcnQvcmVsYXRlZDsNCiBib3VuZGFyeT0iLS0tLT1
fTmV4
dFBhcnRfODcwOTcxMC40MzU4MjUxMDI2NTI1DQpYLUJlZzJNaW11OiBUcnVlDQpYLU1
zZzJN
aWIlUXNaWVudC17dWJtaXQtVG1tZTogTW9uLCAwOCBKYW4gMjAxOCAxNzoyMDowNSA
tMDUw
```



Email témoin extrait et ouvert dans Outlook :



Informations connexes

- Appliance de sécurité du courrier électronique de Cisco - Guides d'utilisateur
- Support et documentation techniques - Cisco Systems
- Quel est format de mbox UNIX (boîte aux lettres) ?
- Où des logs sont enregistrés sur l'appliance de sécurité du courrier électronique de Cisco (ESA) et comment je les accèdent à ?

- Comment archiver des emails sur l'appliance de sécurité du courrier électronique (ESA)