Spec Sheet

UCS C885A M8 Rack Server

A printed version of this document is only a copy and not necessarily the latest version. Refer to the following link for the latest released version:

https://www.cisco.com/c/en/us/products/servers-unified-computing/ucs-c-series-rack-servers/datasheet-listing.html



CISCO SYSTEMS
170 WEST TASMAN DR
SAN JOSE, CA, 95134
WWW.CISCO.COM

PUBLICATION HISTORY

REV A.14 JULY 12, 2026

OVERVIEW 3
DETAILED VIEWS 4
Cisco UCS C885A M8 Rack Server Front View 4
Cisco UCS C885A M8 Rack Server Rear View 5
CPU Tray 6
DC-SCM Module 6
Server Components 7
STANDARD CAPABILITIES and FEATURES 8
CONFIGURING the SERVER (User Selectable) 9
STEP 1 VERIFY SERVER SKU 10
UCSC-885A-M8-M352 11
UCSC-885A-M8-M353 12
UCSC-885A-M8-M354 13
UCSC-885A-M8-M355 14
UCSC-885A-M8-M356 15
Components included in CPU Sled PIDs 16
STEP 2 SELECT INPUT POWER CORD(s) (REQUIRED) 17
STEP 3 SELECT ADDITIONAL DRIVES (OPTIONAL) 18
STEP 4 SELECT NICS AND DPUS (OPTIONAL) 19
STEP 5 SELECT CISCO INTERSIGHT (REQUIRED) 20
STEP 6 SELECT NVIDIA AIE ESSENTIAL LICENSE (OPTIONAL) 21
STEP 7 SELECT OPTICS OPTIONS 22
SPARE PARTS 24
Manufacturer Part Numbers (MPN) 26
Network Cards 26
RAID Controller 26
Drives 26
TECHNICAL SPECIFICATIONS 27
Dimensions and Weight 27
Environmental Specifications 27
System Rating 28
DISCONTINUED EOL PRODUCTS 29

OVERVIEW

The Cisco UCS C885A M8 Rack Server is a dense GPU server designed to deliver scalable accelerated compute capabilities to address the most demanding AI workloads, including deep learning/Large Language Model (LLM) training, model fine-tuning, large model inferencing, and Retrieval-Augmented Generation (RAG).

The Cisco UCS C885A M8 Rack Server offers a choice of 8 AMD MI350X OAM GPUs to deliver massive accelerated compute performance in a single server, as well as one NVIDIA ConnectX-7 NIC or Pollara or BlueField-3 B3140H SuperNIC per GPU to scale AI model training across a cluster of dense-GPU servers.


The server is managed by Cisco Intersight, which can help reduce your Total Cost of Ownership (TCO) and increase your business agility.

NOTE: Initially, the local server management interface will handle configuration and management, while Cisco Intersight will provide inventory capabilities through an integrated Device Connector. Full management operations and configurations through Cisco Intersight will be introduced shortly thereafter in a subsequent phase


The server is offered in fixed configurations with resources optimized for intensive AI and HPC workloads.

Figure 1 Front and Rear views of Cisco UCS C885A M8 Rack Server

Front View

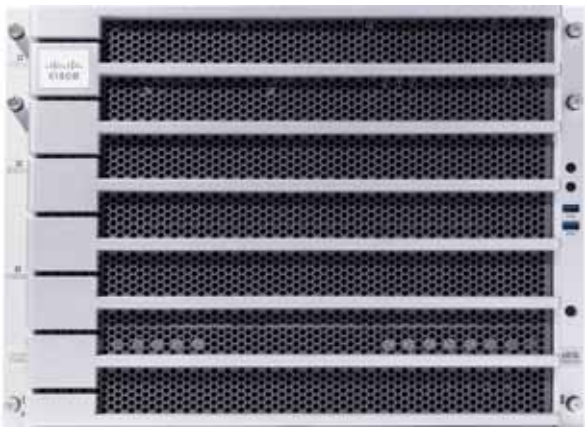

Rear View

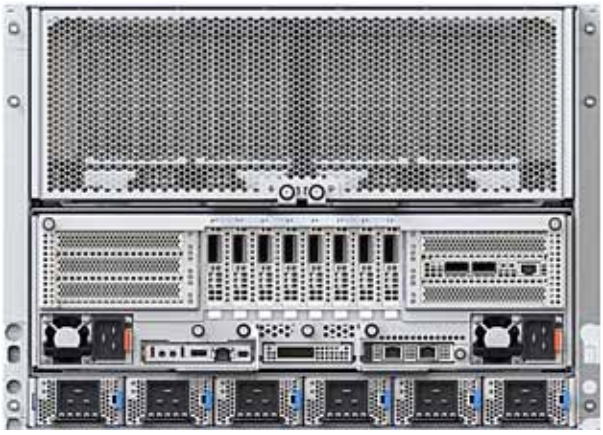


DETAILED VIEWS

Cisco UCS C885A M8 Rack Server Front View

Figure 2 is a front view of the Cisco UCS C885A M8 Rack Server.

Figure 2 Cisco UCS C885A M8 Rack Server Front View

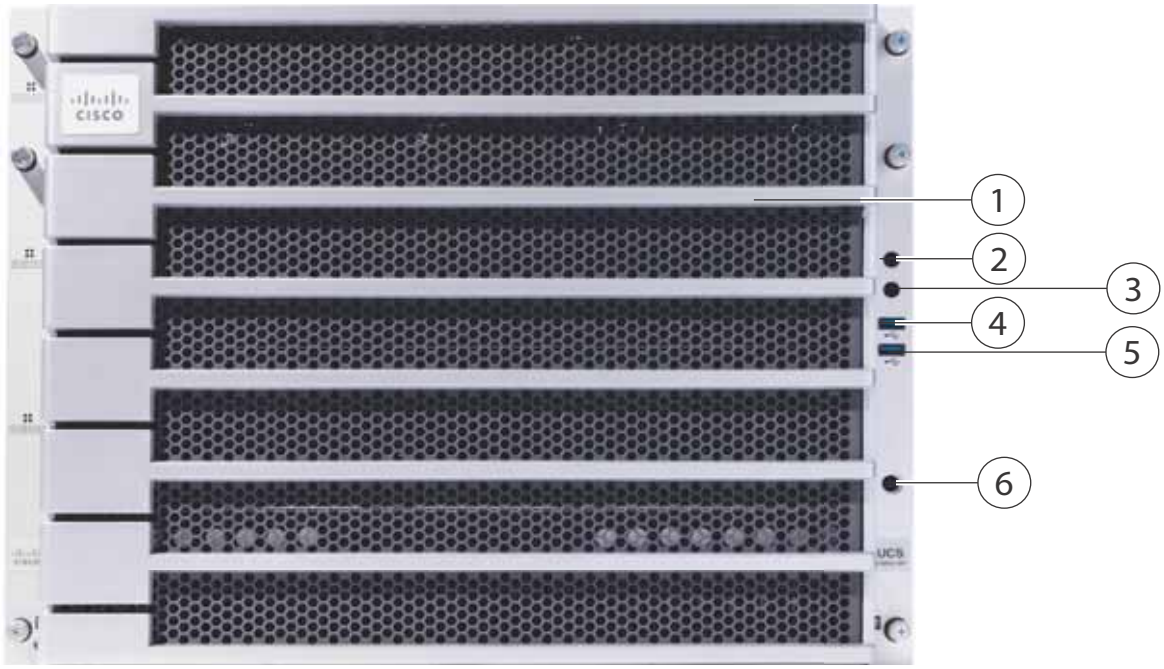


1	Front Bezel	4	USB 2.0 port
2	Power Button with Power/Fault LED	5	USB 2.0 port
3	UID Button with UID LED	6	Thermal Sensor

Cisco UCS C885A M8 Rack Server Rear View

Figure 2 is a front view of the Cisco UCS C885A M8 Rack Server.

Figure 3 Cisco UCS C885A M8 Rack Server Front View

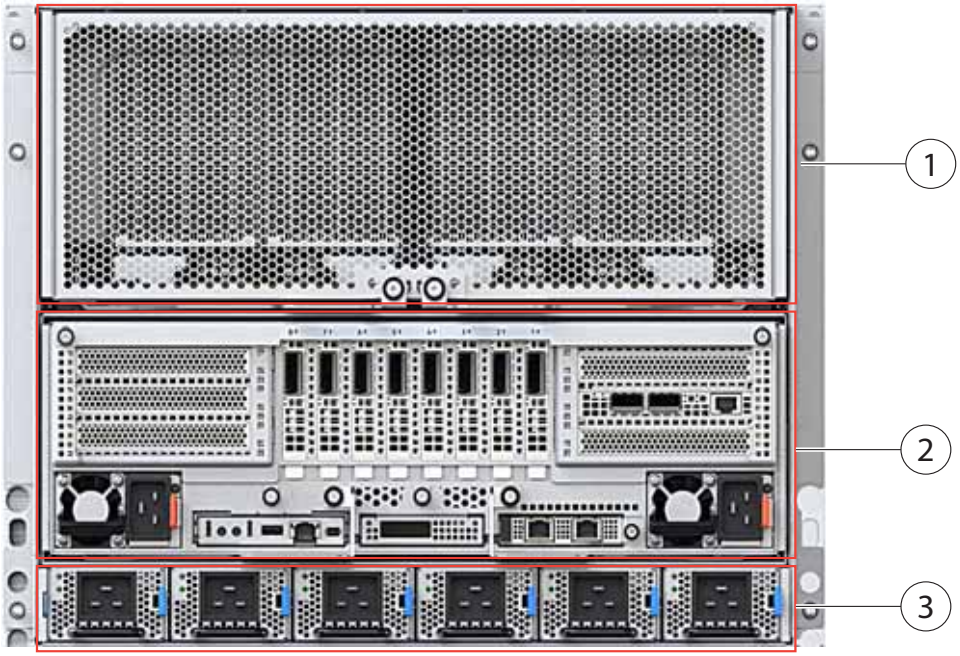


1	HGBB Tray	3	Redundant Power Supply Units
2	CPU Tray (Refer the *Figure 4* for complete details)	-	-

CPU Tray

Figure 4 is a front view of the CPU Tray.

Figure 4 CPU Tray

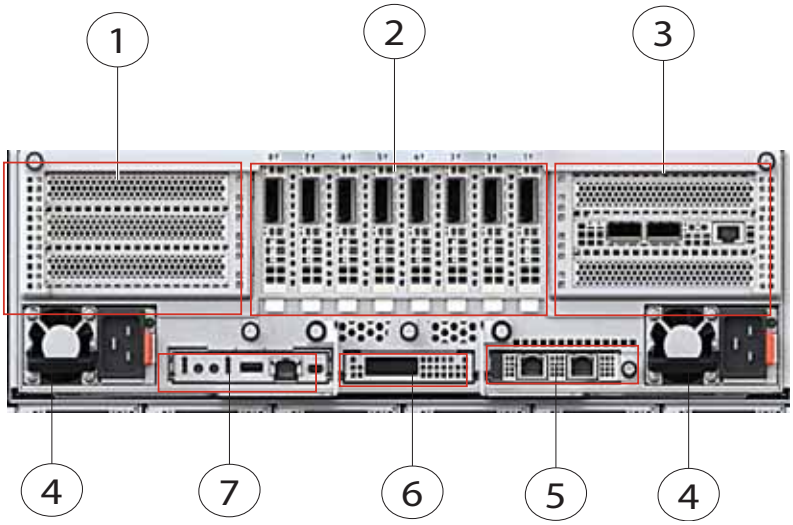


1	2 Slot x16 Full Height Half Length (FHHL) Network Adapter	5	OCP NIC 3.0
2	8 Slot x16 Half Height Half Length (HHHL) Network Adapter	6	OCP 3.0 to M.2 adapter card
3	3 Slot x16 Full Height Half Length (FHHL) Network Adapter	7	DC-SCM Module (Refer the *Figure 5* for complete details)
4	CPU Tray Redundant Power Supply Units	-	-

DC-SCM Module

Figure 5 DC-SCM Module

Figure 5 DC-SCM Module

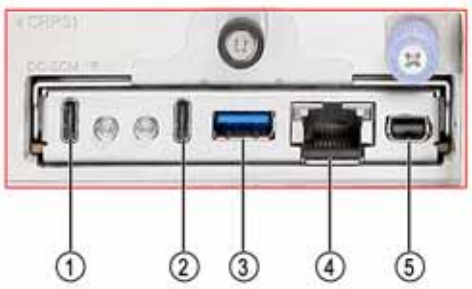

1	USB Type C debug port	4	RJ45 for management Ethernet port
2	USB 3.2 Gen1x1 Type C port	5	Mini Display Port[1]
3	USB 3.2 Gen1x1 Type A port	-	-


Notes:

1. We recommend connecting AST DP with native DP monitor for optimum performance. If an external adaptor is needed (ex. DP to VGA, DP to HDMI, or DP to DVI) please use active type adaptor only. This module does not support DP++ type adapter.

Server Components

Figure 6 shows server components

Figure 6 Server components

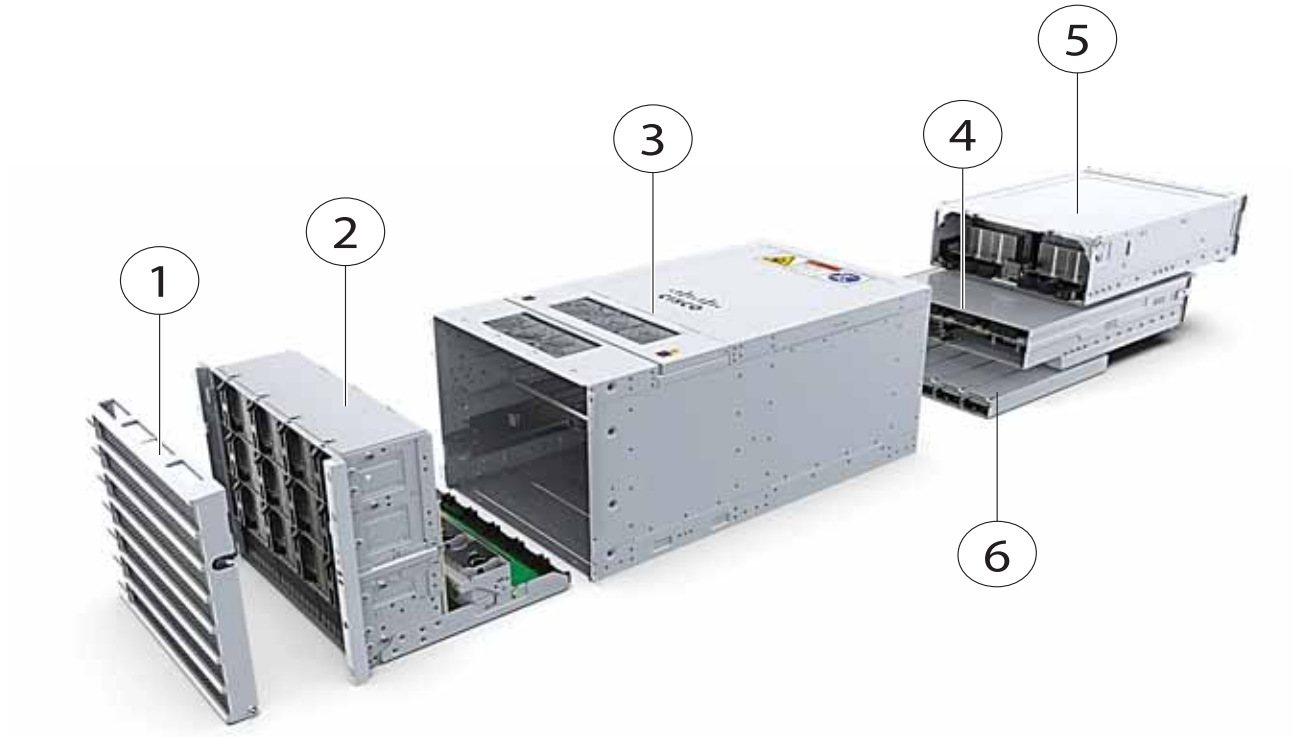

1	Front Cage	4	CPU 3RU Chassis
2	System Fans: ■ 12 hot swappable fans ■ N+1 Redundancy	5	GPU 4RU Chassis
3	Main 8 RU Chassis: ■ Depth 800 mm ■ Width 447 mm ■ Height 353 mm ■ 125Kg/256 lb	6	Power Supply

STANDARD CAPABILITIES and FEATURES

NOTE: The UCS C885A M8 Rack Server comes with some components pre-configured/automatically included, while others require the user to make a selection

Table 1 lists the capabilities and features of the base Cisco UCS C885A M8 Rack Server.

Table 1 Capabilities and Features

Capability/Feature	Description
Chassis	8RU Rack Server
GPU	■ 8x AMD MI350X OAM
GPU Memory	Up to 1.5 TB of Capacity
CPU	Two socket 5th Gen.**or** 4th Gen. AMD EPYC™ Processors
Memory	■ Up to 24 DDDR5-6400 MT/s DIMM slots ■ Up to 3 TB of Capacity (24x 128GB DIMMs)
Networking Cards	■ 8 PCIe Gen5 x16 HHHL for East-West Network, NVIDIA ConnectX-7 NIC or Pollara or BlueField-3 B3140H SuperNIC ■ 5 PCIe Gen5 x16 FHHL for North-South Network ■ 2 OCP 3.0 SFF
LAN	1x OCP 3.0 SFF PCIe Gen5 x8 NIC (CPU1) with 2x 10GbE RJ-45 Ethernet
Management	Host baseboard management controller through DC-SCM with RJ45, IPMI 2.0, KVM with Dedicated LAN, Watchdog
Storage	■ Up to 2X PCIe3 x4 960 GB M.2 NVMe (Boot Device) ■ Up to 16 PCIe5 x4 2.5” U.2 NVMe SSD (Data Cache)
System Cooling	■ 12x 80105 Hot-swappable (N+1) For System Cooling, ■ 4x 6056 Fans For SSDs Cooling
Front IO	2 USB 2.0, 1 ID Button, 1 Power Button
Rear IO	1 USB 3.0 A, 1 USB 3.0 C, mDP, 1 ID Button, 1 Power Button, 1 USB 2.0 C (for debugging), 1 RJ45 (mgmt.)
Power	■ 2x 12V 2700W (N+1) PSUs ■ 6x 54V 3000W (N+2) PSUs
System Power Consumption	Up to 12.5KW
System BIOS	AMI® BIOS

CONFIGURING the SERVER (User Selectable)

Follow these steps to configure the UCS C885A M8 Rack Server:

- *STEP 1 VERIFY SERVER SKU, page 10*
- *STEP 2 SELECT INPUT POWER CORD(s) (REQUIRED), page 17*
- *STEP 3 SELECT ADDITIONAL DRIVES (OPTIONAL), page 18*
- *STEP 4 SELECT NICS AND DPUS (OPTIONAL), page 19*
- *STEP 5 SELECT CISCO INTERSIGHT (REQUIRED), page 20*
- *STEP 6 SELECT NVIDIA AIE ESSENTIAL LICENSE (OPTIONAL), page 21*
- *STEP 7 SELECT OPTICS OPTIONS, page 22*

STEP 1 VERIFY SERVER SKU

NOTE: The UCS C885A M8 Rack Server comes with some components pre-configured/automatically included, while others require the user to make a selection.

- **Auto Included:** ***Table 3.1*** to ***Table 3.5*** shows the auto included components with the respective nodes.
- **User Selectable:** ***STEP 2*** to ***STEP 7***, please select the components that you want to include with your selected node.

Table 2 PID of Major Line Bundle (MLB)

Product ID (PID)	Description
UCS-DGPUM8-MLB	UCS M8 Dense GPU Server MLB This major line bundle (MLB) consists of the GPU server, Intersight, NVIDIA NVAIE S/Ws, and recommended Cisco optics PIDs.

Select one of the product ID (PID) from *Table 3*.0

Table 3.0 PIDs of the UCS C885A M8 Rack Server

Product ID (PID)	Description
UCSC C885A M8 with MI350X GPU	
UCSC-885A-M8-M352[1]	UCS C885A M8 Rack - MI350X GPU, 8x Pollara, 2x CX-7, 2.3TB Mem
UCSC-885A-M8-M353[2]	UCS C885A M8 Rack - MI350X GPU, 8x CX-7, 2x CX-7, 2.3TB Mem
UCSC-885A-M8-M354[3]	UCS C885A M8 Rack - MI350X GPU, 8x Pollara, 2x CX-7, 3TB Mem
UCSC-885A-M8-M355[4]	UCS C885A M8 Rack - MI350X GPU, 8x CX-7, 2x CX-7, 3TB Mem
UCSC-885A-M8-M356[5]	UCS C885A M8 Rack - MI350X GPU, 8x CX-7, 4x CX-7, 3TB Mem

Notes:

1. Refer to the ***Table 3.1*** for auto included PIDs/Components with the selection of ***UCSC-885A-M8-M352*** server
2. Refer to the ***Table 3.2*** for auto included PIDs/Components with the selection of ***UCSC-885A-M8-M353*** server
3. Refer to the ***Table 3.3*** for auto included PIDs/Components with the selection of ***UCSC-885A-M8-M354*** server
4. Refer to the ***Table 3.4*** for auto included PIDs/Components with the selection of ***UCSC-885A-M8-M355*** server
5. Refer to the ***Table 3.5*** for auto included PIDs/Components with the selection of ***UCSC-885A-M8-M356*** server



NOTE: Use the ***STEP 2*** to ***STEP 7*** on the following pages to configure the server with the components that you want to include.

UCSC-885A-M8-M352

Table 3.1 lists auto included components with the **UCSC-885A-M8-M352** Server Node.

Table 3.1 Auto Included Components with UCSC-885A-M8-M352

Product ID (PID)	PID Description	QTY
Base Server		
UCSC-885A-M8-M352	UCS C885A M8 Rack - MI350X GPU, 8x Pollara, 2x CX-7, 2.3TB Mem	
GPU Sled		
C885A-M8-MI35-SLD	UCS C885A M8 GPU SLED MI350X	1
CPU Sled		
C885A-M8-CC-SLD20	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 Pollara CX-7	1
PCIe Card		
C885A-O-ID10GC	UCS C885A M8 OCP INTEL X710 T2L	1
Power Supply		
C885A-PSU-2700W	UCS C885A M8 PSU 2700W 12V AC/DC TITANIUM	2
DC-SCM Card		
C885A-M8-DCSCMAA	UCS C885A M8 DC-SCM Card AMD	1
Storage		
C885A-NV-C1T9KV	UCS C885A M8 SSD 1.92TB NVMe	2
Power Supply		
C885A-PSU-3000W	UCS C885A M8 PSU 3000W 54V	6
Chassis		
C885A-M8-CHASSIS	UCS C885A M8 L10 Chassis	1
BZL		
C885A-SEC-BZL	UCS C885A M8 Bezel	1

UCSC-885A-M8-M353

Table 3.2 lists auto included components with the **UCSC-885A-M8-M353** Server Node.

Table 3.2 Auto Included Components with UCSC-885A-M8-M353

Product ID (PID)	PID Description	QTY
Base Server		
UCSC-885A-M8-M353	UCS C885A M8 Rack - MI350X GPU, 8x CX-7, 2x CX-7, 2.3TB Mem	
GPU Sled		
C885A-M8-MI35-SLD	UCS C885A M8 GPU SLED MI350X	1
CPU Sled		
C885A-M8-CC-SLD13	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7s	1
PCIe Card		
C885A-O-ID10GC	UCS C885A M8 OCP INTEL X710 T2L	1
Power Supply		
C885A-PSU-2700W	UCS C885A M8 PSU 2700W 12V AC/DC TITANIUM	2
DC-SCM Card		
C885A-M8-DCSCMAA	UCS C885A M8 DC-SCM Card AMD	1
Storage		
C885A-NV-C1T9KV	UCS C885A M8 SSD 1.92TB NVMe	2
Power Supply		
C885A-PSU-3000W	UCS C885A M8 PSU 3000W 54V	6
Chassis		
C885A-M8-CHASSIS	UCS C885A M8 L10 Chassis	1
BZL		
C885A-SEC-BZL	UCS C885A M8 Bezel	1

UCSC-885A-M8-M354

Table 3.3 lists auto included components with the **UCSC-885A-M8-M354** Server Node.

Table 3.3 Auto Included Components with UCSC-885A-M8-M354

Product ID (PID)	PID Description	QTY
Base Server		
UCSC-885A-M8-M354	UCS C885A M8 Rack - MI350X GPU, 8x Pollara, 2x CX-7, 3TB Mem	
GPU Sled		
C885A-M8-MI35-SLD	UCS C885A M8 GPU SLED MI350X	1
CPU Sled		
C885A-M8-CC-SLD21	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 Pollara CX-7	1
PCIe Card		
C885A-O-ID10GC	UCS C885A M8 OCP INTEL X710 T2L	1
Power Supply		
C885A-PSU-2700W	UCS C885A M8 PSU 2700W 12V AC/DC TITANIUM	2
DC-SCM Card		
C885A-M8-DCSCMAA	UCS C885A M8 DC-SCM Card AMD	1
Storage		
C885A-NV-C1T9KV	UCS C885A M8 SSD 1.92TB NVMe	2
Power Supply		
C885A-PSU-3000W	UCS C885A M8 PSU 3000W 54V	6
Chassis		
C885A-M8-CHASSIS	UCS C885A M8 L10 Chassis	1
BZL		
C885A-SEC-BZL	UCS C885A M8 Bezel	1

UCSC-885A-M8-M355

Table 3.4 lists auto included components with the **UCSC-885A-M8-M355** Server Node.

Table 3.4 Auto Included Components with UCSC-885A-M8-M355

Product ID (PID)	PID Description	QTY
Base Server		
UCSC-885A-M8-M355	UCS C885A M8 Rack - MI350X GPU, 8x CX-7, 2x CX-7, 3TB Mem	
GPU Sled		
C885A-M8-MI35-SLD	UCS C885A M8 GPU SLED MI350X	1
CPU Sled		
C885A-M8-CC-SLD17	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7s	1
PCIe Card		
C885A-O-ID10GC	UCS C885A M8 OCP INTEL X710 T2L	1
Power Supply		
C885A-PSU-2700W	UCS C885A M8 PSU 2700W 12V AC/DC TITANIUM	2
DC-SCM Card		
C885A-M8-DCSCMAA	UCS C885A M8 DC-SCM Card AMD	1
Storage		
C885A-NV-C1T9KV	UCS C885A M8 SSD 1.92TB NVMe	2
Power Supply		
C885A-PSU-3000W	UCS C885A M8 PSU 3000W 54V	6
Chassis		
C885A-M8-CHASSIS	UCS C885A M8 L10 Chassis	1
BZL		
C885A-SEC-BZL	UCS C885A M8 Bezel	1

UCSC-885A-M8-M356

Table 3.5 lists auto included components with the **UCSC-885A-M8-M356** Server Node.

Table 3.5 Auto Included Components with UCSC-885A-M8-M356

Product ID (PID)	PID Description	QTY
Base Server		
UCSC-885A-M8-M356	UCS C885A M8 Rack - MI350X GPU, 8x CX-7, 4x CX-7, 3TB Mem	
GPU Sled		
C885A-M8-MI35-SLD	UCS C885A M8 GPU SLED MI350X	1
CPU Sled		
C885A-M8-CC-SLD22	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7	1
PCIe Card		
C885A-O-ID10GC	UCS C885A M8 OCP INTEL X710 T2L	1
Power Supply		
C885A-PSU-2700W	UCS C885A M8 PSU 2700W 12V AC/DC TITANIUM	2
DC-SCM Card		
C885A-M8-DCSCMAA	UCS C885A M8 DC-SCM Card AMD	1
Storage		
C885A-NV-C1T9KV	UCS C885A M8 SSD 1.92TB NVMe	2
Power Supply		
C885A-PSU-3000W	UCS C885A M8 PSU 3000W 54V	6
Chassis		
C885A-M8-CHASSIS	UCS C885A M8 L10 Chassis	1
BZL		
C885A-SEC-BZL	UCS C885A M8 Bezel	1

Components included in CPU Sled PIDs

Table 4 Components included in CPU Sled PIDs

Config[1]	CPU Sled[2]	CPU			DDR5 Memory			Network Cards							M.2	Boot Raid
								CX-7								
		AMD EPYC 9554	AMD EPYC 9535	AMD EPYC 9575F	64GB	96GB	128GB	1x400G (E-W)	2x200G (N-S)	4x25G (N-S)	Pollara (E-W)	B3220 (N-S)	B3140H (E-W)	X710-T2L OCP (Mgmt)	960GB	
H13	SLD09	2			24			8	2					1	2	Y
M3X4 M355	SLD17			2			24	8	2					1	2	Y
M352	SLD20			2		24			2		8			1	2	Y
M354	SLD21			2			24		2		8			1	2	Y
M356	SLD22			2			24	8	2	2				1	2	Y

Notes:

1. Configuration: the complete PID example is “UCSC-885A-M8-H11”
2. CPU Sled: the complete PID example is “C885A-M8-CC-SLD01”

STEP 2 SELECT INPUT POWER CORD(s) (REQUIRED)

Select the appropriate power cords option from the ***Table 7***.

Table 5 Available Power Cords

Product ID (PID)	PID Description
CAB-C13-CBN	CABASY,WIRE,JUMPER CORD, 27" L, C13/C14, 10A/250V
CAB-C19-C20-IND	Power Cord C19-C20 India
CAB-SABS-C19-IND	SABS 164-1 to IEC-C19 India
CAB-C19-C20-3M-JP	Power Cord C19-C20, 3M/10ft Japan PSE mark
CAB-AC-16A-AUS	Power Cord, 250VAC, 16A, Australia C19

STEP 3 SELECT ADDITIONAL DRIVES (OPTIONAL)

The Additional drives are listed in ***Table 6***

Table 6 Additional drives

Product ID (PID)	PID Description
C885A-NVD15TK1V	15.3TB 2.5in 15mm Kioxia CD8 Hg Perf Val End Gen5 1X NVMe
C885A-NVD3T8K1V	3.8TB 2.5in 15mm Kioxia CD8 Hg Perf Val End Gen5 1X NVMe
C885A-NVD7T6K1V	7.6TB 2.5in 15mm Kioxia CD8 Hg Perf Val End Gen5 1X NVMe

STEP 4 SELECT NICS AND DPUS (OPTIONAL)

The NICs and DPUs are listed in ***Table 7***.

Table 7 NICs and DPUs

Product ID (PID)	PID Description
C885A-P-N3220	UCS C885A M8 Nvidia OEM BlueField-3 B3220 DPU 2x200G

STEP 5 SELECT CISCO INTERSIGHT (REQUIRED)

Cisco Intersight™ is a Software-as-a-Service (SaaS) hybrid cloud operations platform which delivers intelligent automation, observability, and optimization to customers for traditional and cloud-native applications and infrastructure.

Product ID (PID)	
DC-MGT-SAAS	Cisco Intersight SaaS

Select Cisco Intersight option as desired from *Table 8*

Table 8 Cisco Intersight SaaS

Product ID (PID)	PID Description
Cisco Intersight - SaaS	
DC-MGT-IS-SAAS-ES	Infrastructure Services PVA - Advantage
DC-MGT-IS-SAAS-AD	Infrastructure Services PVA - Essentials
Cisco Intersight - Private Virtual Appliance	
DC-MGT-IS-PVAPP-ES	Infrastructure Services SaaS/CVA - Advantage
DC-MGT-IS-PVAPP-AD	Infrastructure Services SaaS/CVA - Essentials

STEP 6 SELECT NVIDIA AIE ESSENTIAL LICENSE (OPTIONAL)

Table 9 NVIDIA AIE Essential License

Product ID (PID)	PID Description
Software License	
NV-AIE-LIC=	NVIDIA AI Essential Software License Spare(Order QTY 1 only)
Standard License	
NV-AIE-P-5Y	24x7 Support Services for NVIDIA AIE Essentials per GPU,5 Yr
NV-AIE-24X7S-1Y	NVIDIA AIE Essential Subscription & 24x7 Supp per GPU, 1Y
NV-AIE-P-1Y	24x7 Support Services for NVIDIA AIE Essentials per GPU,1 Yr
NV-AIE-24X7S-3Y	NVIDIA AIE Essential Subscription & 24x7 Supp per GPU, 3Y
NV-AIE-P-3Y	24x7 Support Services for NVIDIA AIE Essentials per GPU,3 Yr
NV-AIE-24X7S-5Y	NVIDIA AIE Essential Subscription & 24x7 Supp per GPU, 5Y
NV-AIE-P-5Y	24x7 Support Services for NVIDIA AIE Essentials per GPU,5 Yr
NV-AIE-S-1Y	NVIDIA AI Enterprise Essentials Subscription per GPU, 1 Year
NV-AIE-S-3Y	NVIDIA AI Enterprise Essentials Subscription per GPU, 3 Year
NV-AIE-S-5Y	NVIDIA AI Enterprise Essentials Subscription per GPU, 5 Year
Education	
NV-AIE-EDP-5Y	24x7 Support Services for NVIDIA AIE Ess per GPU, EDU, 5 Yr
NV-AIE-24X7EDS-1Y	NVIDIA AIE Essential Subscription & 24x7 Supp per GPU EDU 1Y
NV-AIE-EDP-1Y	24x7 Support Services for NVIDIA AIE Ess per GPU, EDU, 1 Yr
NV-AIE-24X7EDS-3Y	NVIDIA AIE Essential Subscription & 24x7 Supp per GPU EDU 3Y
NV-AIE-EDP-3Y	24x7 Support Services for NVIDIA AIE Ess per GPU, EDU, 3 Yr
NV-AIE-24X7EDS-5Y	NVIDIA AIE Essential Subscription & 24x7 Supp per GPU EDU 5Y
NV-AIE-EDP-5Y	24x7 Support Services for NVIDIA AIE Ess per GPU, EDU, 5 Yr
NV-AIE-EDS-1Y	NVIDIA AIE Essentials Subscription per GPU, EDU, 1 Year
NV-AIE-EDS-3Y	NVIDIA AIE Essentials Subscription per GPU, EDU, 3 Years
NV-AIE-EDS-5Y	NVIDIA AIE Essentials Subscription per GPU, EDU, 5 Years

STEP 7 SELECT OPTICS OPTIONS

Choose Transceivers

The recommended Cisco Optics for the server are listed in ***Table 10***.

Table 10 Supported Optic Cables

Product ID (PID)	Description
Optics	
QSFP-200G-SL4	200GBASE SL4 QSFP56 Transceiver, MPO, 30m over OM4 MMF
QSFP-200G-SR4-S	200GBASE SR4 QSFP56 Transceiver, MPO, 100m over OM4 MMF
QSFP-400G-DR4	400G QSFP112 Transceiver, 400GBASE-DR4, MPO-12,500m parallel
QSFP-200G-FR4-S	200GBASE FR4 QSFP56 PAM4 1310nm LC Transceiver, 2Km over SMF
Single Mode Patch Cable	
CB-M12-M12-SMF10M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 10M
CB-M12-M12-SMF15M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 15M
CB-M12-M12-SMF1M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 1M
CB-M12-M12-SMF20M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 20M
CB-M12-M12-SMF25M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 25M
CB-M12-M12-SMF2M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 2M
CB-M12-M12-SMF30M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 30M
CB-M12-M12-SMF3M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 3M
CB-M12-M12-SMF5M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 5M
CB-M12-M12-SMF7M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, SMF, 7M
Multi-mode Patch Cable	
CB-M12-M12-MMF1.5	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 1.5M
CB-M12-M12-MMF10M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 10M
CB-M12-M12-MMF15M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 15M
CB-M12-M12-MMF1M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 1M
CB-M12-M12-MMF20M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 20M
CB-M12-M12-MMF25M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 25M
CB-M12-M12-MMF2M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 2M
CB-M12-M12-MMF30M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 30M
CB-M12-M12-MMF3M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 3M
CB-M12-M12-MMF4M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 4M
CB-M12-M12-MMF5M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 5M

Table 10 Supported Optic Cables

Product ID (PID)	Description
CB-M12-M12-MMF7M	CABLE, MPO12-MPO12, TRUNK CABLE, TYPE B, MMF, 7M

SPARE PARTS

This section lists the upgrade and service-related parts for the server. Some of these parts are configured with every server.



NOTE: Some spare parts you order may also require accessories for full functionality. The spares and their accessory parts are listed in ***Table 11***.

Table 11 Spare Parts

Product ID (PID)	PID Description
C885A-M8-CHASSIS=	UCS C885A M8 L10 Chassis
C885A-M8-DCSCMGN=	UCS C885A M8 DCDC-SCM Card Nvidia GPU, 4th Gen AMD EPYC CPU
C885A-M8-DCSCMAA=	UCS C885A M8 DC-SCM Card AMD GPU, 5th Gen AMD EPYC CPU
C885A-M8-FAN=	UCS C885A M8 Fan Module
C885A-NV-C1T9KV=	UCS C885A M8 SSD 1.92TB NVMe
C885A-O-ID10GC=	UCS C885A M8 OCP INTEL X710 T2L
C885A-PSU-2700W=	UCS C885A M8 PSU 2700W 12V AC/DC TITANIUM
C885A-PSU-3000W=	UCS C885A M8 PSU 3000W 54V
C885A-SEC-BZL=	UCS C885A M8 Bezel
NV-AIE-LIC=	NVIDIA AI Essential Software License Spare(Order QTY 1 only)
C885A-M8-CC-SLD13=	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7s
C885A-NVD15TK1V=	15.3TB 2.5in 15mm Kioxia CD8 Hg Perf Val End Gen5 1X NVMe
C885A-NVD3T8K1V=	3.8TB 2.5in 15mm Kioxia CD8 Hg Perf Val End Gen5 1X NVMe
C885A-NVD7T6K1V=	7.6TB 2.5in 15mm Kioxia CD8 Hg Perf Val End Gen5 1X NVMe
C885A-P-N3220=	UCS C885A M8 Nvidia OEM BlueField-3 B3220 DPU 2x200G
C885A-M8-SLD17=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7s
C885A-M8-CC-SLD20=	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 Pollara CX-7
C885A-M8-CC-SLD21=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 Pollara CX-7
C885A-M8-CC-SLD22=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7
C885A-M8-CC-SLD24=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 Pollara CX-7
C885A-M8-MI35-SLD=	UCS C885A M8 GPU SLED MI350X
UCSC-P-APS400GF=	AMD Pollara 1Q400P 1x 400GbE, QSFP112, PCIe Gen5.0 x16, HHHL

Manufacturer Part Numbers (MPN)

Below tables lists the Manufacturer Part Numbers for the NVIDIA NICs supported with Cisco UCS C885A M8 Rack Server

Network Cards

Table 12 Network Cards

Network Card	MPN	Legacy PN
NVIDIA ConnectX-7 (2x200G)	900-9X7AH-6278-DTZ or 900-9X7AH-0078-DTZ	MCX755106AS-HEAT
NVIDIA ConnectX-7 (1x400G)	900-9X7AH-0039-STZ or 900-9X7AH-6239-STZ	MCX715105AS-WEAT
NVIDIA BF3 B3140H	900-9D3D4-00NN-HA0	-
NVIDIA BF3 B3220	900-9D3B6-00SV-AA0	-
NVIDIA BF3 B3240	900-9D3B6-00SN-AB0	-
NVIDIA Connect-X (4x25G)	900-9X7AO-6203-ST0	MCX713104AS-ADAT
AMD Pensando Pollara 400 AI NIC	Pollara-400-1Q400P	

RAID Controller

Table 13 RAID controller

Raid Controller	MPN	Legacy PN
UCS-M2-NVRAID	03-50148-01	-

Drives

Table 14 Drives

Drives	MPN	Legacy PN
C885A-NV-C1T9KV	KCMY1RUG1T92	-
C885A-NV-D3T8K1V=	KCD81PUG3T84	-
C885A-NVD7T6K1V=	KCD81PUG7T68	-
C885A-NVD15TK1V=	KCD81PUG15T3	-

TECHNICAL SPECIFICATIONS

Dimensions and Weight

Table 15 Cisco UCS C885A M8 Rack Server Dimensions and Weight

Parameter	Value
Height	353 mm (13.9 in)
Width	447 mm (17.6 in)
Depth	800 mm (31.5 in)
Weight	120 kg (265 lb)

Environmental Specifications

Table 16 Cisco UCS C885A M8 Rack Server Environmental Specifications

Parameter	Value
Temperature range[1]	
Operating temperature	5°C to 35°C (45°F to 95°F)
Non-operating temperature	-40°C to 70°C (-40°F to 158°F)
Relative humidity (noncondensing)[2]	
Operating humidity	8% to 90%
Non-operating humidity	5% to 95%
Emissions Classification (EMC)[3]	
FCC Rating	Class A
Normative	CISPR 32; EN55032; CISPR 24; EN55024; AS/NZS CISPR 32; FCC CFR Title 47 Part 15 Subpart B; ICES-003
Standards	EN 61000-3-2; EN 61000-3-3

Notes:

1. All temperature ratings shown are for sea level. An altitude derating of 1°C per 304.8 m (1.8°F per 1,000 ft) to 3048 m (10,000 ft) is applicable. No direct sunlight allowed. Maximum rate of change is 20°C/hr (36°F/hr).
2. Storage maximum humidity of 95% is based on a maximum temperature of 38.7°C (101.7°F). Altitude maximum for storage corresponds to a pressure minimum of 70 KPa.
3. Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.



NOTE: The upper operating temperature limit and rate of change may be limited by the type and number of options installed. The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

System Rating

Table 17 Cisco UCS C885A M8 Rack Server System rating

Parameter	Value
Total Input	6x 3000W@54V PSUs (4+2 Redundant for all SKUs), 2x 2700W CRPS @12V (1+1 Redundant for EU SKUs); 80 PLUS Titanium
For CPU Tray	200-240Vac, 50-60Hz, 14.5A or 200-240Vac, 50-60Hz, 16A per PSU (x2 Max)
For System	200-240Vac, 50-60Hz, 16A per PSU (x6 Max)

DISCONTINUED EOL PRODUCTS

Below is the list of parts were previously available for this product and are no longer sold. Please refer to the EOL Bulletin Links via table below to determine if still supported.

Table 18 EOS

Product ID	Description	EOL/EOS link
C885A-M8-CC-SLD01	UCS C885A M8 CPU SLED AMD 9554 96GB 5600 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD01=	UCS C885A M8 CPU SLED AMD 9554 96GB 5600 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD02	UCS C885A M8 CPU SLED AMD9575F 96GB 6400DDR5 B3140H B3220 NG	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD02=	UCS C885A M8 CPU SLED AMD9575F 96GB 6400DDR5 B3140H B3220 NG	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD03	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD03=	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD05	UCS C885A M8 CPU SLED AMD9575F 96GB 6400DDR5 B3140H B3220 AG	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD05=	UCS C885A M8 CPU SLED AMD9575F 96GB 6400DDR5 B3140H B3220 AG	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD06	UCS C885A M8 CPU SLED AMD 9535F 64GB 6400 DDR5 CX-7	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD06=	UCS C885A M8 CPU SLED AMD 9535F 64GB 6400 DDR5 CX-7	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD07	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD07=	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD08	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD08=	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html

Table 18 EOS

C885A-M8-CC-SLD09	UCS C885A M8 CPU SLED AMD 9554 64GB 5600 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD09=	UCS C885A M8 CPU SLED AMD 9554 64GB 5600 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD10	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 B3140H B3240	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD10=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 B3140H B3240	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD11	UCS C885A M8 CPU SLED AMD9575F 96GB 6400DDR5 B3140H B3220 MB	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD11=	UCS C885A M8 CPU SLED AMD9575F 96GB 6400DDR5 B3140H B3220 MB	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD12	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD12=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD14	UCS C885A M8 CPU SLED AMD 9535F 64GB 6400 DDR5 CX-7	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD14=	UCS C885A M8 CPU SLED AMD 9535F 64GB 6400 DDR5 CX-7	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD15	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD15=	UCS C885A M8 CPU SLED AMD 9575F 96GB 6400 DDR5 CX-7 B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD16	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD16=	UCS C885A M8 CPU SLED AMD 9575F 128GB 6400 DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD18	UCS C885A M8 CPU SLED AMD 9575F 96GB DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD18=	UCS C885A M8 CPU SLED AMD 9575F 96GB DDR5 CX-7s	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD19	UCS C885A M8 CPU SLED AMD 9575F 96GB 8x B3140H, 1x B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html

Table 18 EOS

C885A-M8-CC-SLD19=	UCS C885A M8 CPU SLED AMD 9575F 96GB 8x B3140H, 1x B3220	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD23	UCS C885A M8 Rack - H200 GPU, 4x CX-7, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-CC-SLD23=	UCS C885A M8 Rack - H200 GPU, 4x CX-7, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-DCSCM	UCS C885A M8 DC-SCM Card Nvidia GPU, 5th Gen AMD EPYC CPU	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-DCSCM1	UCS C885A M8 DC-SCM Card AMD GPU, 5th Gen AMD EPYC CPU HAI	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-DCSCM1=	UCS C885A M8 DC-SCM Card AMD GPU, 5th Gen AMD EPYC CPU HAI	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-DCSCM=	UCS C885A M8 DC-SCM Card Nvidia GPU, 5th Gen AMD EPYC CPU	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-H2SX-SLD	UCS C885A M8 GPU SLED H200 NV 935-24287-0040-000	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-H2SX-SLD=	UCS C885A M8 GPU SLED H200 NV 935-24287-0040-000	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-H2SXSLD	UCS C885A M8 GPU SLED H200 NV 935-24287-0040-000	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-H2SXSLD=	UCS C885A M8 GPU SLED H200 NV 935-24287-0040-000	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-MI3X-SLD	UCS C885A M8 GPU SLED MI300X AMD 100-300000069H	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-MI3X-SLD=	UCS C885A M8 GPU SLED MI300X AMD 100-300000069H	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H20	UCS C885A M8 Rack - H200 GPU, 2x CX-7, 1.5TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H21	UCS C885A M8 Rack - H200 GPU, 8x CX-7, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H22	UCS C885A M8 Rack - H200 GPU, 8x B3140H, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H23	UCS C885A M8 Rack - H200 GPU, 8x CX-7, 2x CX-7, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html

Table 18 EOS

UCSC-885A-M8-H24	UCS C885A M8 Rack - H200 GPU, 8x 3140, 1x 3220 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H25	UCS C885A M8 Rack - H200 GPU, 8x CX-7, 2x CX-7, 3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H26	UCS C885A M8 Rack - H200 GPU, 8x CX-7, 2x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H27	UCS C885A M8 Rack - H200 GPU, 8x CX-7, 2x B3220, 3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H28	UCS C885A M8 Rack - H200 GPU, 8x B3140H, 2x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-H29	UCS C885A M8 Rack - H200 GPU, 12x 400GbE CX-7, 3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-HC1	UCS C885A M8 Rack - H200 GPU, 8x B3140H, 2x B3240, 3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X0	UCS C885A M8 Rack - MI300X GPU, 2x CX-7, 1.5TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X1	UCS C885A M8 Rack - MI300X GPU, 8x CX-7, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X2	UCS C885A M8 Rack-MI300X GPU, 8x B3140H, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X3	UCS C885A M8 Rack - MI300X GPU, 8x CX-7, 2x CX-7, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X4	UCS C885A M8 Rack - MI300X GPU, 10x CX-7, 3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X5	UCS C885A M8 Rack - MI300X GPU, 8x CX-7, 2x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
UCSC-885A-M8-M3X6	UCS C885A M8 Rack - MI300X GPU, 8x CX-7, 4x CX-7, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-c885a-m8-rs-nvidia-hgx-h200-gpus-eol.html
C885A-M8-H1SX-SLD	UCS C885A M8 GPU SLED H100 NV 935-24287-0000-000	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
C885A-M8-H1SX-SLD=	UCS C885A M8 GPU SLED H100 NV 935-24287-0000-000	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
C885A-M8-DCSCMGN	UCS C885A M8 DCSCM Card Nvidia GPU, 4th Gen AMD EPYC CPU	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html

Table 18 EOS

C885A-M8-DCSCMGN=	UCS C885A M8 DCSCM Card Nvidia GPU, 4th Gen AMD EPYC CPU	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
UCSC-885A-M8-H11	UCS C885A M8 Rack - H100 GPU, 8x CX-7, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
UCSC-885A-M8-H11=	UCS C885A M8 Rack - H100 GPU, 8x CX-7, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
UCSC-885A-M8-H12	UCS C885A M8 Rack - H100 GPU, 8x B3140H, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
UCSC-885A-M8-H12=	UCS C885A M8 Rack - H100 GPU, 8x B3140H, 1x B3220, 2.3TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
UCSC-885A-M8-H13	UCS C885A M8 Rack - H100 GPU, 8x CX-7, 2x CX-7, 1.5TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html
UCSC-885A-M8-H13=	UCS C885A M8 Rack - H100 GPU, 8x CX-7, 2x CX-7, 1.5TB Mem	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/nvidia-hgx-h100-gpus-eol.html

Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at **www.cisco.com/go/offices.**

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)