Track Task Routing Events in a CCE Environment Integrated with Webex Connect

Contents

Introduction

Prerequisites

- Requirements:
- Component Used:

Background

- Deployment Architecture

Logs

- Webex Connect Portal
- Cloud Connect - Digital Routing
- Router
- PG
- Browser Console

Related Information

Introduction

This document describes the message flow for a new task routed to an agent in a Contact Center Enterprise solution integrated with Webex Connect.

Prerequisites

Requirements:

Cisco recommends that you have knowledge of these topics:

- Cisco Packaged Contact Center Enterprise (PCCE)
- Cisco Unified Contact Center Enterprise (UCCE)
- Webex Connect

Component Used:

The information in this document is based on these software and hardware versions:

- ICM Version: 12.6(2)
- Finesse Version: 12.6(2)
- Webex Control Hub
- Webex Connect Portal
- Webex Engage Portal


The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure


that you understand the potential impact of any command.

Background


Webex Connect allows the Contact Center business and its customers to interact using digital channels such as email, chat, and SMS. The Contact Center Enterprise (CCE) solution integrates with Webex Connect to create a seamless omnichannel experience for customers. This integration helps customers to interact across voice and digital channels of communication. Webex Connect offers a rich self-service and bot integration to empower customers to get answers to some common questions. It provides a unified solution for integrated routing, Agent Desktop, and reporting service. Webex Connect provides a simplified framework that helps partners and customers interact through digital channels.

Deployment Architecture

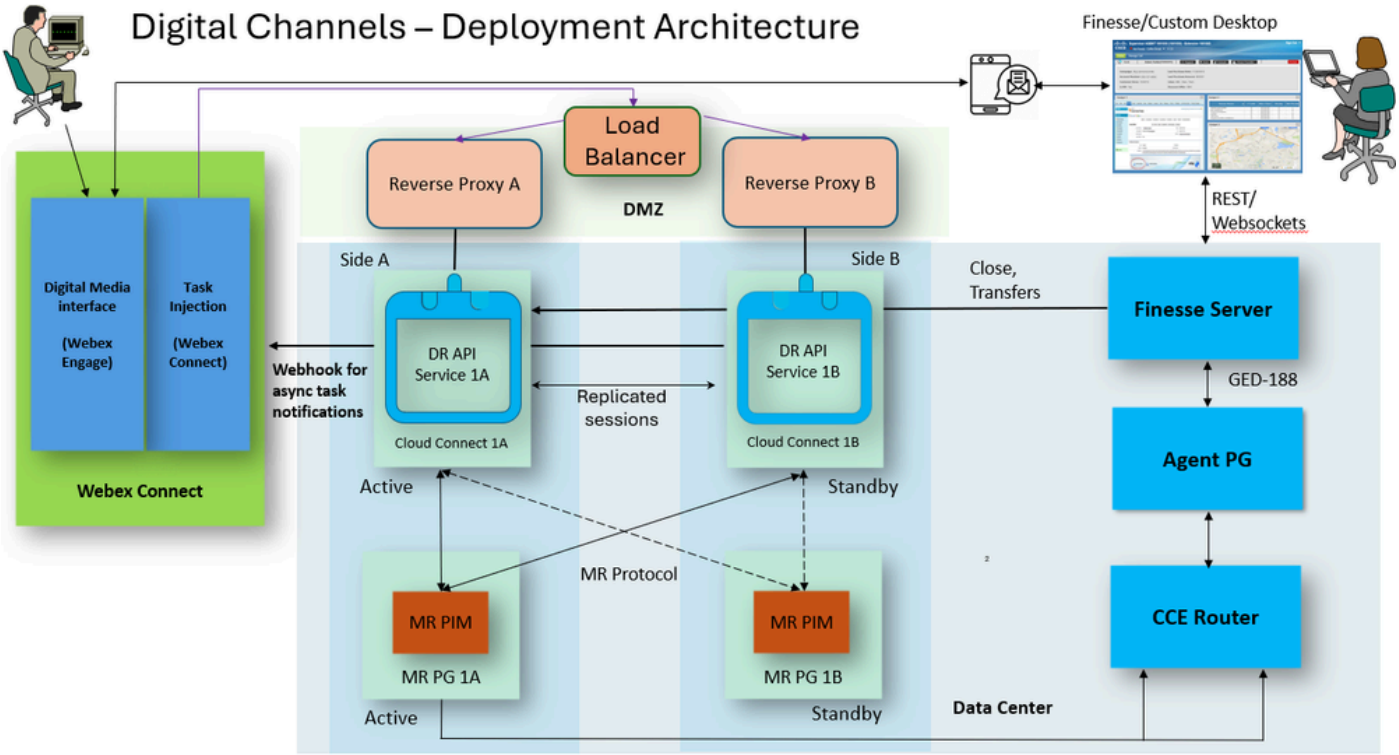

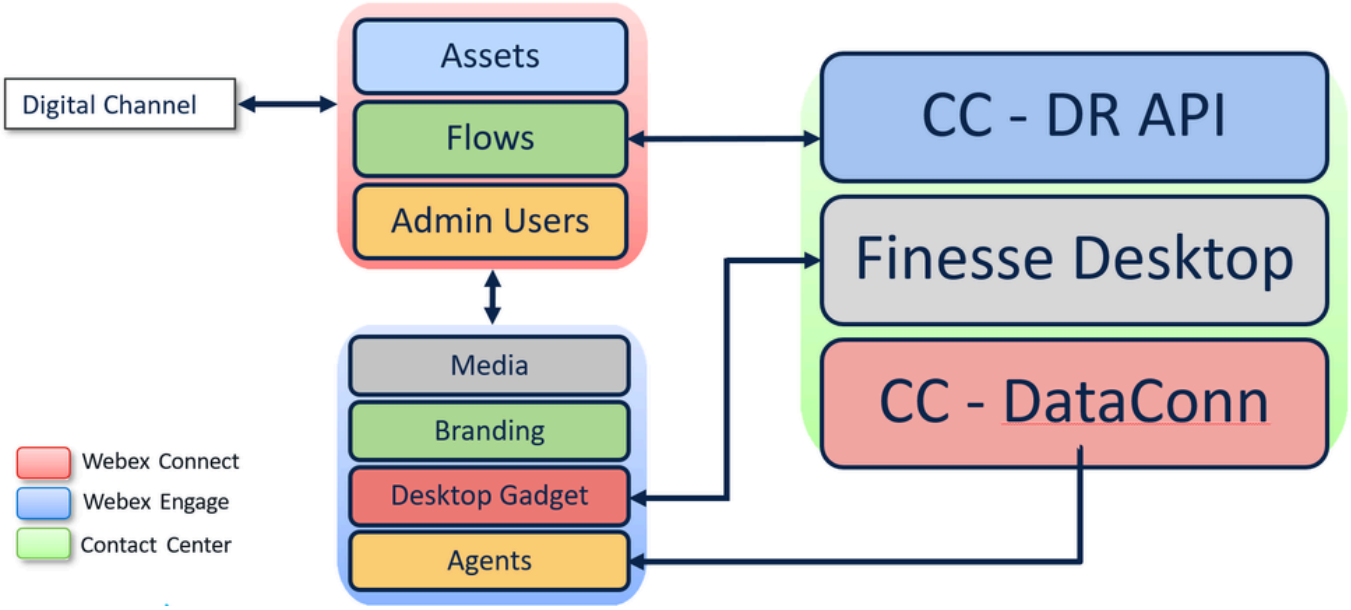

Activity Routing

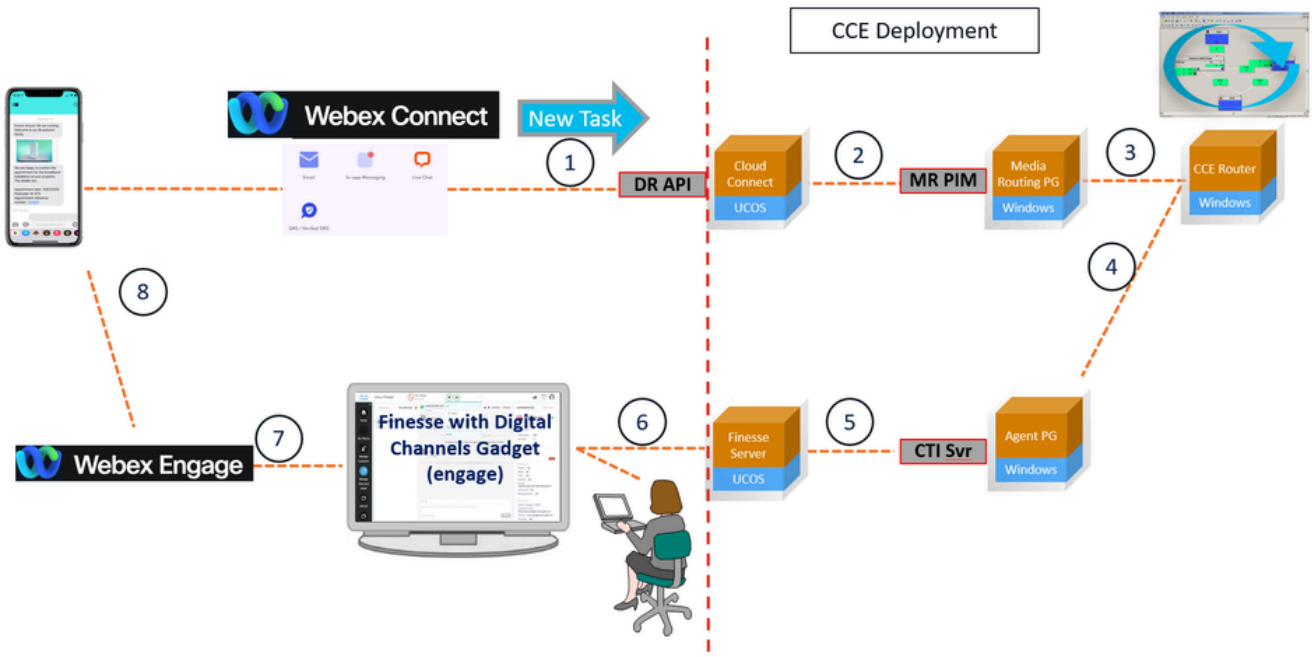


Logs

Webex Connect Portal


Node - Configure APP Event

- This node is the start point in the flow. The logs for this node show details such as the App Entry Point configured on the Webex Connect portal, the URL where the chat form was initiated from, and so on.

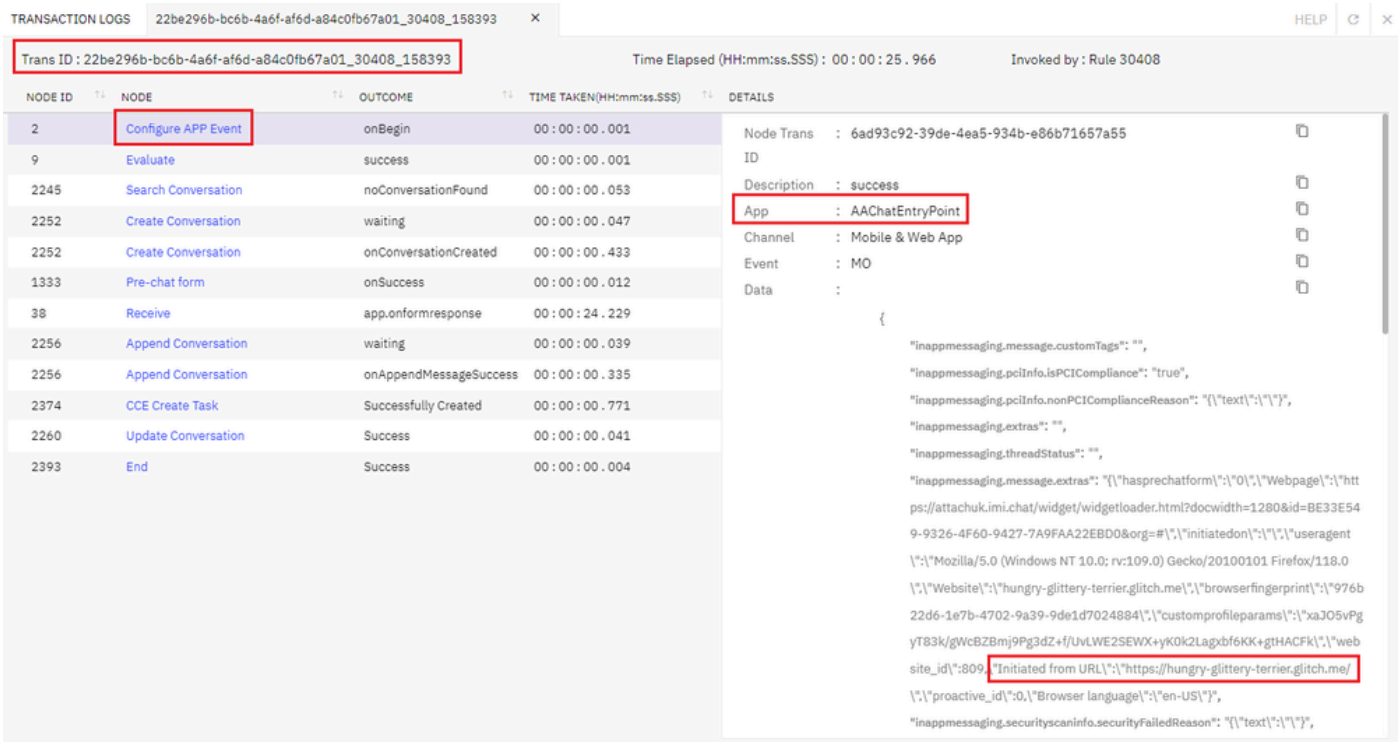


Node - Pre-chat form

- The logs for this node shows the questions loaded from the chat template created on the Webex Connect portal.

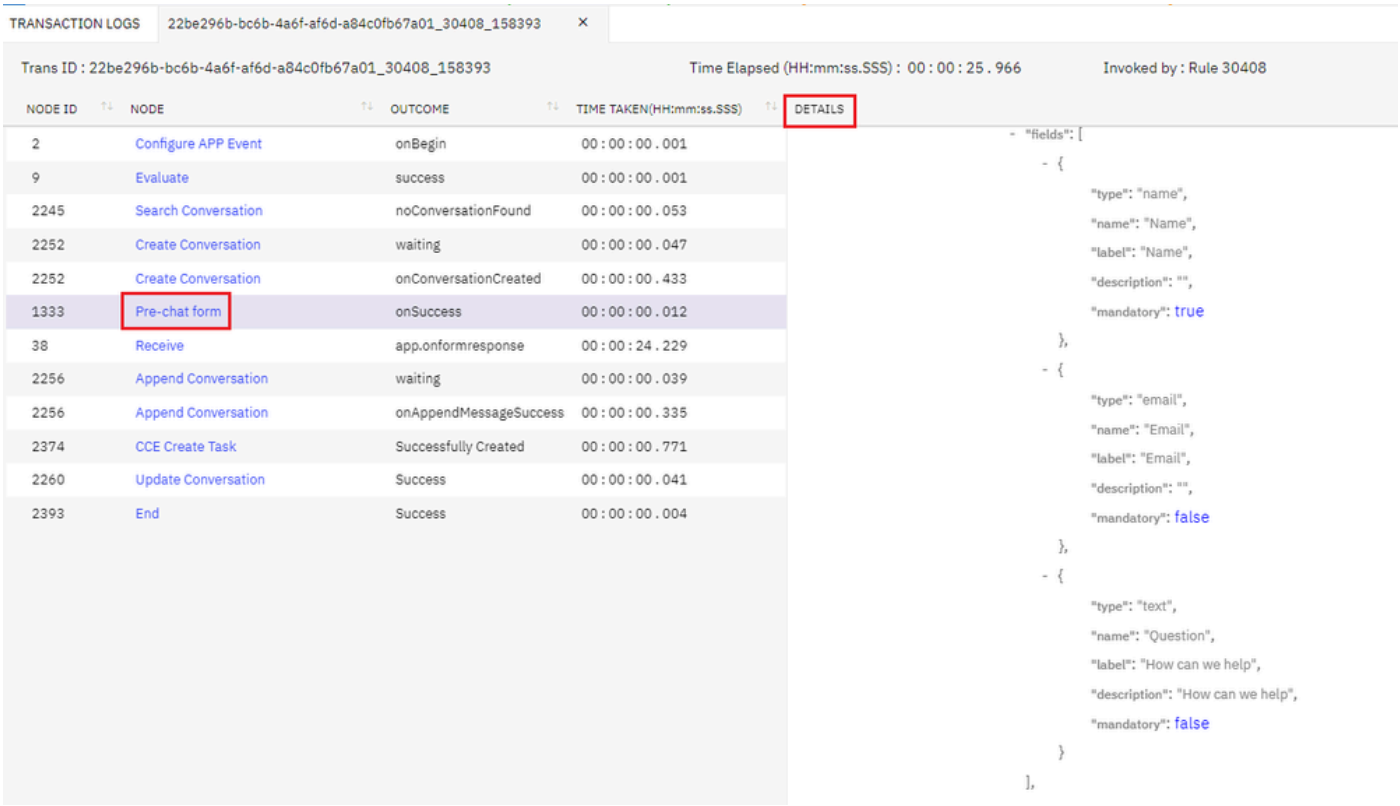


Node - Receive

- The logs for this node shows the responses provided to the questions loaded from the chat template.

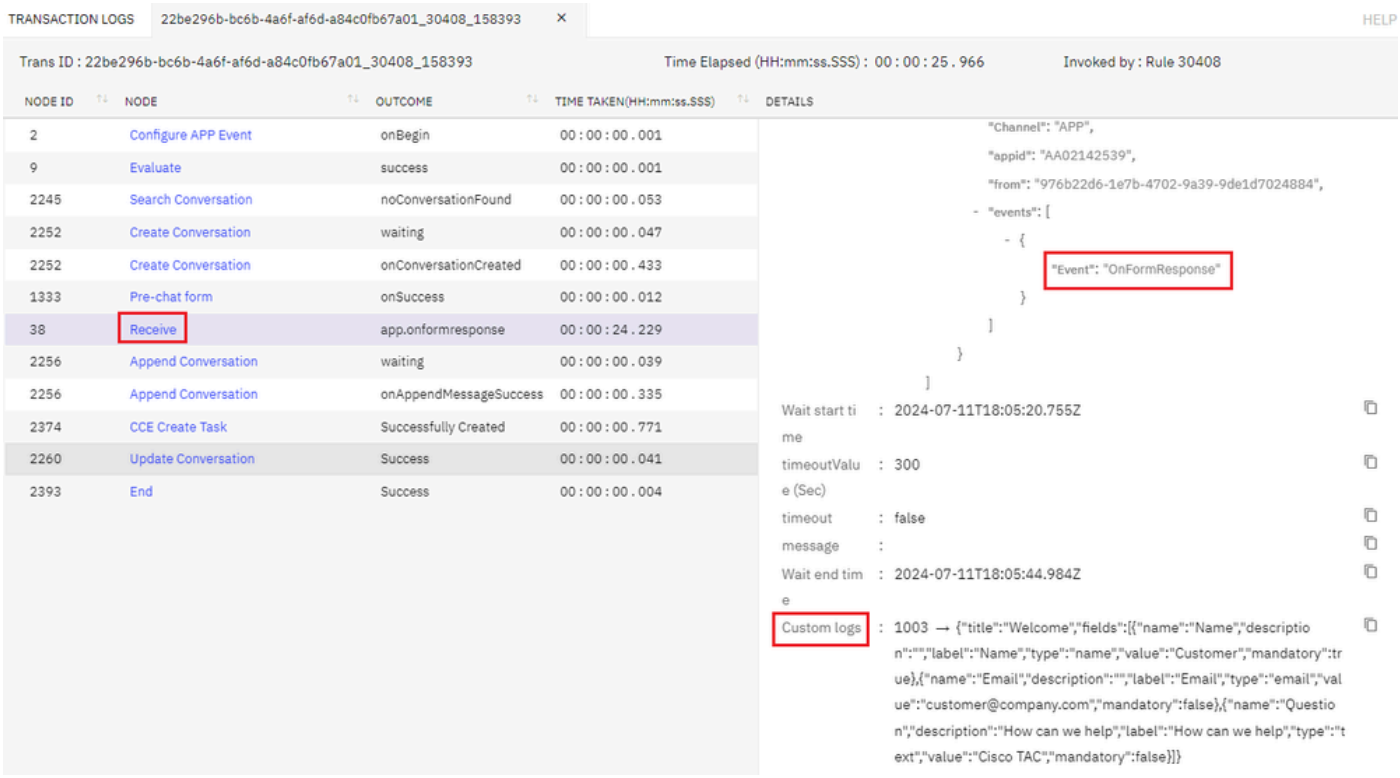

Node - CCE Create Task

- This node calls Contact Center Enterprise Task API to create a new Task. While configuring flows in Webex Connect, this node is needed for creating the task on Contact Center Enterprise.

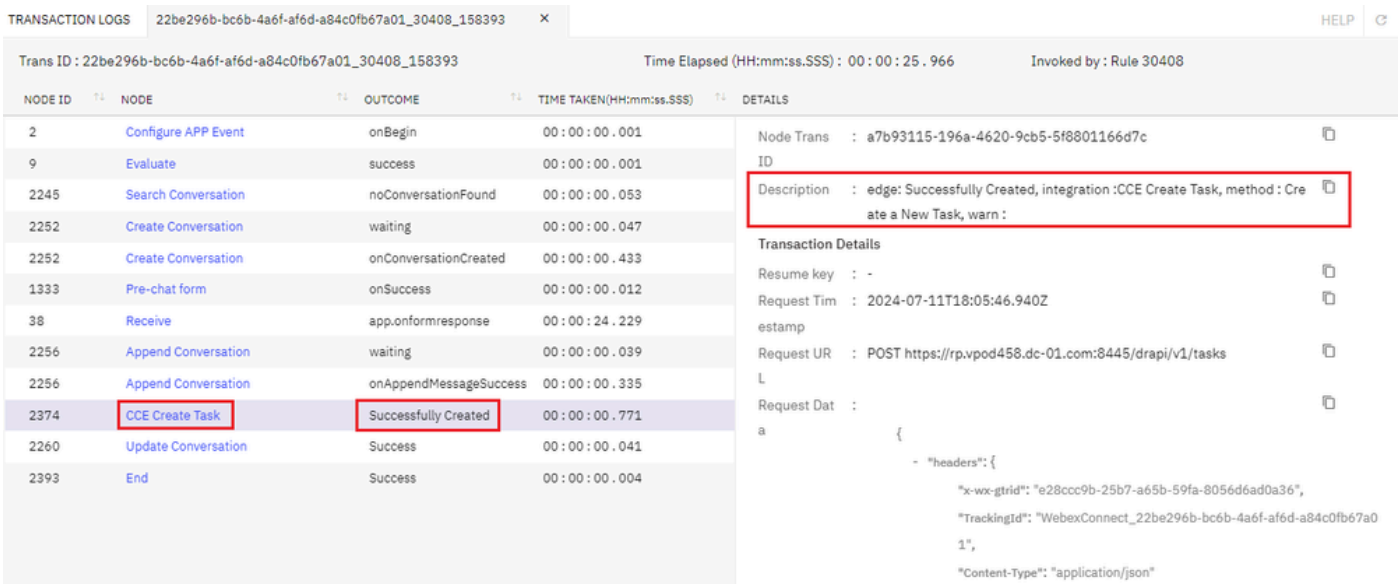

Cloud Connect - Digital Routing

<#root>

Incoming NEW_TASK request coming in from the 'CCE Create Task' node Webex Connect Flow:

```
[INFO ] 2024-07-11 14:05:45.989 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
[DEBUG] 2024-07-11 14:05:46.024 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
```

```
[DEBUG] 2024-07-11 14:05:46.025 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.025 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
[INFO ] 2024-07-11 14:05:46.031 [http-nio-127.0.0.1-8091-exec-9:60] [WebexConnect_22be296b-bc6b-4a6f-af
```

This NEW_TASK request is then sent to the MR-PIM:

```
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - NEW_TASK Reque
[INFO ] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent RequestMe
[DEBUG] 2024-07-11 14:05:46.038 [ApiRequestsProcessorThread:211] [] MrRequestProcessor - Sent NewTaskV5
```

Task state is queued and then routed:

```
[INFO ] 2024-07-11 14:05:46.044 [ApiRequestsProcessorThread:211] [] RedissonQueues - Enqueued Notificat
[INFO ] 2024-07-11 14:05:46.052 [MRProcessorThread:136] [] RedissonQueues - Enqueued Notification on qu
[DEBUG] 2024-07-11 14:05:46.055 [MRProcessorThread:136] [] ServiceCounterTrace - DrapiCountersCurrentIn
[INFO ] 2024-07-11 14:05:46.540 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.542 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.543 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[INFO ] 2024-07-11 14:05:46.656 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.658 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] TaskNotificationProcessor - Notifi
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.659 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:05:46.764 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:05:46.765 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
.
.
.
.
```

TASK is now ended successfully:

```
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.615 [http-nio-127.0.0.1-8091-exec-7:58] [] FilterChainProxy - Securing POST
[DEBUG] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.679 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[INFO ] 2024-07-11 14:07:37.701 [http-nio-127.0.0.1-8091-exec-7:58] [FINESSE_b8526c49-5dfc-43b4-ba55-1a
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:37.703 [TaskNotificationProcessor-3:153] [] NotificationRestClient - increment
[INFO ] 2024-07-11 14:07:38.171 [TaskNotificationProcessor-3:153] [] NotificationRestClient - Sending n
[DEBUG] 2024-07-11 14:07:38.173 [TaskNotificationProcessor-3:153] [] ServiceCounterTrace - DrapiCounter
```

Router

<#root>

NewCall request received from MR PG:

```
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) NewCall: CID=(154689,2448), DN=WxConnectChat1, ANI=, CED=, RC
14:05:46:019 ra-rtr Trace: RCKSeqNum=-1, NIC_DN= ServiceRequested=0 OrigRCCallID{PhyCtrlID=0, RCID=0, D
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName Scalar Customer
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID Scalar CSR4PMKEIFWI7EMX
```

```
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary Scalar 0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup Scalar 0
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName Scalar chat
```

RouteComplete:

```
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) RouteComplete:
14:05:46:019 ra-rtr Trace: Route: DN=WxConnectChat1, ANI=, CED=, Label=
14:05:46:019 ra-rtr Trace: Route: CID=(154689,2448), Labels=1
```

DeviceTargetPreCall message sent to the Agent PG with the ECC variables:

```
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) DeviceTargetPreCall_V15: CID=(154689,2448), PerID=5000, SGSTI
14:05:46:019 ra-rtr Trace: DN=WxConnectChat1, ANI=, CED=, CustDBProvidedDigits=, RouteID=5039, NetworkT
14:05:46:019 ra-rtr Trace: RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
14:05:46:019 ra-rtr Trace: CallGUID=, CustomerID=1 ServiceRequested=0
14:05:46:019 ra-rtr Trace: LocationParamPKID=, LocationParamName=, SIPHeader=
14:05:46:019 ra-rtr Trace: NIC_CalledPartyNumber=WxConnectChat1 ECCPayloadID=1
14:05:46:019 ra-rtr Trace: OrigRCCallID{PhyCtrlID=0, RCID=0, DlgID=0x0} OrigOperationType=0
14:05:46:019 ra-rtr Trace: PV1= PV2= PV3= PV4= PV5=
14:05:46:019 ra-rtr Trace: PV6= PV7= PV8= PV9= PV10=
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup             Scalar  0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName       Scalar  Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName   Scalar  chat
```

Connect Label sent to MR PG with the ECC variables:

```
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Connect: CID=(154689,2448), EventSelect=0x0, ServiceType=0, R
14:05:46:019 ra-rtr Trace: ID Name Type Index Value
14:05:46:019 ra-rtr Trace: 5038 user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
14:05:46:019 ra-rtr Trace: 5039 user_DR_Backup             Scalar  0
14:05:46:019 ra-rtr Trace: 5040 user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
14:05:46:019 ra-rtr Trace: 5041 user_DR_CustomerName       Scalar  Customer
14:05:46:019 ra-rtr Trace: 5042 user_DR_MediaChannelName   Scalar  chat
14:05:46:019 ra-rtr Trace: (14 x 0 : 0 0) Deleting Dialog.
```

PG

MR-PG PIM

<#root>

NEW_TASK request on mr pim:

```
14:05:46:132 PG2A-pim5 Trace: Application->PG:
Message = NEW_TASK; Length = 280 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
MRDomainID = (5016) Hex 00001398
PreviousTask = -1:-1:-1
```

```
PreferredAgent = Undefined
Service = Undefined
CiscoReserved = (0) Hex 00000000
ScriptSelector: WxConnectChat1
ApplicationString2: 22be296b-bc6b-4a6f-af6d-a84c0fb67a01
ServiceRequested = (0) Hex 00000000
QueueType = (0) Hex 00000000
QueueID = Undefined
```

NewCall request is now sent to the Router:

```
14:05:46:132 PG2A-pim5 Trace: Send INRCMSGNewCall to Router : :
NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey=5007 CRS(RtrDate=-1,RtrCID=-1) RCKSeq#=-1 NIC
```

Router responds back with the Connect label:

```
14:05:46:132 PG2A-pim5 Trace: MR_Peripheral::On_Router_Connect:
CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(RtrDate=154689,RtrCID=2448) RCKSeq#=0 ErrorCode=0 TR
```

DO_THIS_WITH_TASK message sent over to WxConnect:

```
14:05:46:132 PG2A-pim5 Trace: PG->Application:
Message = DO_THIS_WITH_TASK; Length = 250 bytes
DialogueID = (14) Hex 0000000e
SendSeqNo = (1) Hex 00000001
IcmTaskID = 154689:2448: 1
SkillGroup = (5239) Hex 00001477
Service = Undefined
Agent = (5172) Hex 00001434
AgentInfo: 5172
Label:
ApplicationString2:
MRDID = (5016) Hex 00001398
Interruptible = (0) Hex 00000000
PrecisionQueueID = (0) Hex 00000000
```

MR-PG OPC

<#root>

NEW_CALL request received from the digital routing service on the Cloud Connect server, with the ECC

```
14:05:46:132 PG2A-opc Trace: SendINRCMessage: NEW_CALL RCID=5007 PID=5001 DID=14 DIDRelSeq#=1 GrpDelKey
Name Type Index Value
user_DR_CustomerName       Scalar  Customer
user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
user_DR_Backup             Scalar  0
user_DR_MediaChannelName   Scalar  chat
14:05:46:132 PG2A-opc Trace: ProcessINRCMsgs - BEGIN Msg=8 src=48 dest=1 flag=2 size=444
```

CONNECT label received from router with the ECC variables:

```
14:05:46:132 PG2A-opc Trace: SendPIMINRCMessage: CONNECT RCID=5007 PID=5001 DID=14 DIDRelSeq#=0 CRS(Rtr
Name Type Index Value
user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
user_DR_Backup             Scalar  0
user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
user_DR_CustomerName       Scalar  Customer
user_DR_MediaChannelName   Scalar  chat
```

BuildClosedCallRecord after chat ends:

```
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord: CallObj=0x4473dc8 DateTime=07/11 18:05:45 IntervalDA
14:05:46:132 PG2A-opc Trace: PV1=(null) PV2=(null) PV3=(null) PV4=(null) PV5=(null) PV6=(null) PV7=(nul
14:05:46:132 PG2A-opc Trace: BuildClosedCallRecord:
Name Type Index Value
user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
user_DR_Backup             Scalar  0
user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
user_DR_CustomerName       Scalar  Customer
user_DR_MediaChannelName   Scalar  chat
```

Agent PG - OPC

<#root>

Agent PG receives the Device Precall Indicator message along with the ECC variables as agent '5172' i

```
14:05:46:132 PG3A-opc Trace: ProcessARMPreCallMsg - Precall received for Agent '5172' MRDomainID '5016'
14:05:46:132 PG3A-opc Trace: callVar1 '' callVar2 '' callVar3 '' callVar4 ''
callVar5 '' callVar6 '' callVar7 '' callVar8 ''
callVar9 '' callVar10 ''
ECCDataSize '85'
14:05:46:132 PG3A-opc Trace: Name Type Index Value
14:05:46:132 PG3A-opc Trace: user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
14:05:46:132 PG3A-opc Trace: user_DR_Backup             Scalar  0
14:05:46:132 PG3A-opc Trace: user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
14:05:46:132 PG3A-opc Trace: user_DR_CustomerName       Scalar  Customer
14:05:46:132 PG3A-opc Trace: user_DR_MediaChannelName   Scalar  chat
14:05:46:132 PG3A-opc Trace: MergeECCData Task ID 154689:2448:1, Payload ID 0, New Payload 1
```

OfferTaskInd >> StartTaskInd >> EndTaskInd:

```
14:05:51:321 PG3A-opc Trace: OfferTaskInd - InvokeID = 2375719, ClientInvokeID = 2375719, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:05:52:133 PG3A-opc Trace: StartTaskInd - InvokeID = 2375721, ClientInvokeID = 2375721, MRDID = 5016,
SkillGroupID = 5239, ServiceID = -1, SessionID = 2
14:07:35:168 PG3A-opc Trace: EndTaskInd - InvokeID = 2376024, ClientInvokeID = 2376024, TaskID = 154689,
WrapupData = , ApplicationData =
```

BuildTerminationRecordMsg:

```
14:07:35:168 PG3A-opc Trace: TaskObj::BuildTerminationRecordMsg - DateTime='07/11 18:07:34' Periph=5000
14:07:35:168 PG3A-opc Trace: Var1='(null)' Var2='(null)' Var3='(null)' Var4='(null)' Var5='(null)' Var6
```

```
14:07:35:168 PG3A-opc Trace: AgentSessionID=5172-133650295444320000 NetworkTargetID=-1 TrunkGroupID=-1
14:07:35:168 PG3A-opc Trace: Name Type Index Value
14:07:35:168 PG3A-opc Trace: user_DR_Primary            Scalar  0cloudconnect1.dcloud.cisco.com
14:07:35:168 PG3A-opc Trace: user_DR_Backup             Scalar  0
14:07:35:168 PG3A-opc Trace: user_DR_MediaResourceID    Scalar  CSR4PMKEIFWI7EMX
14:07:35:168 PG3A-opc Trace: user_DR_CustomerName       Scalar  Customer
14:07:35:168 PG3A-opc Trace: user_DR_MediaChannelName   Scalar  chat
```

Browser Console

<#root>

Agent is RESERVED:

```
14:05:57.964 2024-07-11T14:05:57.964 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.963 -040
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.966 2024-07-11T14:05:57.966 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.965 -040
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>RESERVED</state>
<stateChangeTime>2024-07-11T18:05:57.952Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:05:57.968 2024-07-11T14:05:57.968 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.967 -040
14:05:57.972 :: Media change a{_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, contex
14:05:57.972 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event rec
```

Agent is OFFERED the chat with the ACCEPT action available to the agent:

14:05:57.975 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5
14:05:57.975 2024-07-11T14:05:57.975 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.974 -040
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>

```
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.978 2024-07-11T14:05:57.978 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.977 -040
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialedNumber>WxConnectChat1</dialedNumber>
```

```
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
```

<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>ACCEPT</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>OFFERED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:05:57.955Z</stateChangeTime>
</Participant>
</participants>
<state>OFFERED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>POST</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -040
14:05:57.979 2024-07-11T14:05:57.979 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.978 -040
14:05:57.980 2024-07-11T14:05:57.980 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.979 -040
14:05:57.981 2024-07-11T14:05:57.981 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:05:57.980 -040
14:05:57.988 :: usemediasetup processTask- a{_id: '154689_2448_1', _restObj: undefined, autoSubscribe:
14:05:57.989 ::- MediaPopover _showPopOver before popover {taskId: {…}, id: '154689_2448_1', mediaPrope

Agent ACCEPT's the chat:

14:06:00.353 2024-07-11T14:06:00.353 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.352 -040
14:06:00.354 2024-07-11T14:06:00.354 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.353 -040
14:06:00.355 ::- MediaPopover popOverCallBack:Received popover callback with response {popoverId: '940a
14:06:00.356 ::- MediaPopover _handleMedia {popoverId: '940a0c56-c305-456f-90a6-9aaf8871fcee', source:
14:06:00.358 2024-07-11T14:06:00.357 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.356 -040
14:06:00.364 ::- MediaPopover dismissPopOver before dismiss a{_super: undefined, _id: '154689_2448_1',
14:06:00.365 2024-07-11T14:06:00.365 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.364 -040
14:06:00.367 ::- MediaPopover dismissPopOver after dismiss {} {} {}
14:06:00.371 2024-07-11T14:06:00.371 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.370 -040
14:06:00.427 2024-07-11T14:06:00.427 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.426 -040
14:06:00.428 success: Could move the task to ACCEPT state {status: 202, content: null, isUnsent: false,

Chat state is now ACCEPTED:

14:06:00.543 2024-07-11T14:06:00.543 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.542 -040
<data>
<dialog>

<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>

<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.546 2024-07-11T14:06:00.546 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.545 -040
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>

```
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
```

<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>START</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:57.955Z</startTime>
<state>ACCEPTED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:06:00.421Z</stateChangeTime>
</Participant>
</participants>
<state>ACCEPTED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -040
14:06:00.548 2024-07-11T14:06:00.548 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.547 -040
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -040
14:06:00.549 2024-07-11T14:06:00.549 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:06:00.548 -040
14:06:00.552 :: usemediasetup processTask- a{_super: undefined, _id: '154689_2448_1', _restObj: undefin

Chat session ended and agent is moved to the WORK_READY state:

14:07:32.910 moved to wrap-up state successfully
14:07:32.911 2024-07-11T14:07:32.911 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.955 -040
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>
<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.914 2024-07-11T14:07:32.914 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.958 -040
<data>
<media>
<description>WxConnect Chat</description>
<dialogLogoutAction>CLOSE</dialogLogoutAction>
<id>5016</id>

<interruptAction>IGNORE</interruptAction>
<interruptible>false</interruptible>
<maxDialogLimit>3</maxDialogLimit>
<name>WxConnectChat</name>
<routable>true</routable>
<state>WORK_READY</state>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
<uri>/finesse/api/User/1080/Media/5016</uri>
</media>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016</source>
</Update>
14:07:32.915 2024-07-11T14:07:32.915 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.959 -040
14:07:32.920 :: Media change a{_super: undefined, _id: '5016', _restObj: a, autoSubscribe: true, contex
14:07:32.920 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : media change event rec
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [handleMediaChange] : caching all mrd's
14:07:32.921 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : mediaListToBeCached : u
14:07:32.922 Finesse-IMI Gadget : [useDigitalChannel Hook] [cacheMediaStates] : final cached item : {"5

Chat activity is now in the WRAPPING_UP state:

14:07:32.924 2024-07-11T14:07:32.924 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.968 -040
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>

<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>

<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>
14:07:32.926 2024-07-11T14:07:32.926 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:32.970 -040
<data>
<dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>

<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
<action>PAUSE</action>
<action>UPDATE_CALL_DATA</action>
<action>TRANSFER</action>
<action>CLOSE</action>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>WRAPPING_UP</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:32.895Z</stateChangeTime>
</Participant>
</participants>
<state>WRAPPING_UP</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</dialog>
</data>
<event>PUT</event>
<requestId></requestId>
<source>/finesse/api/Dialog/154689_2448_1</source>
</Update>

Chat session is now CLOSED:

14:07:35.185 finesse.js:3766 2024-07-11T14:07:35.185 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1
<data>
<dialogs>
<Dialog>

<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>

```
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>
14:07:35.188 finesse.js:3766 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 1
<data>
<dialogs>
<Dialog>
<taskId>
<routerCallKeyDay>154689</routerCallKeyDay>
<routerCallKeyCallID>2448</routerCallKeyCallID>
<routerCallKeySequenceNum>1</routerCallKeySequenceNum>
</taskId>
<id>154689_2448_1</id>
<mediaProperties>
<mediaId>5016</mediaId>
<wrapUpReason></wrapUpReason>
<dialedNumber>WxConnectChat1</dialedNumber>
<callvariables>
<CallVariable>
<name>callVariable1</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable2</name>
```

<value></value>
</CallVariable>
<CallVariable>
<name>callVariable3</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable4</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable5</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable6</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable7</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable8</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable9</name>
<value></value>
</CallVariable>
<CallVariable>
<name>callVariable10</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_Primary</name>
<value>cloudconnect1.dcloud.cisco.com</value>
</CallVariable>
<CallVariable>
<name>user_DR_Backup</name>
<value></value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaResourceID</name>
<value>CSR4PMKEIFWI7EMX</value>
</CallVariable>
<CallVariable>
<name>user_DR_CustomerName</name>
<value>Customer</value>
</CallVariable>
<CallVariable>
<name>user_DR_MediaChannelName</name>
<value>chat</value>
</CallVariable>
</callvariables>
<queueNumber>11180119</queueNumber>
<queueName>WxConnectChat1</queueName>
<callKeyCallId>2448</callKeyCallId>
<callKeyPrefix>154689</callKeyPrefix>
<callKeySequenceNum>1</callKeySequenceNum>
</mediaProperties>
<mediaType>WxConnectChat</mediaType>

```
<mediaChannel>chat</mediaChannel>
<mediaClass>chat</mediaClass>
<participants>
<Participant>
<actions>
</actions>
<mediaAddress>1080</mediaAddress>
<mediaAddressType></mediaAddressType>
<startTime>2024-07-11T18:05:46.096Z</startTime>
<state>CLOSED</state>
<stateCause></stateCause>
<stateChangeTime>2024-07-11T18:07:35.124Z</stateChangeTime>
</Participant>
</participants>
<dispositionCode>CD_NORMAL_END_TASK</dispositionCode>
<state>CLOSED</state>
<uri>/finesse/api/Dialog/154689_2448_1</uri>
</Dialog>
</dialogs>
</data>
<event>DELETE</event>
<requestId></requestId>
<source>/finesse/api/User/1080/Media/5016/Dialogs</source>
</Update>

14:07:35.188 2024-07-11T14:07:35.188 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.232 -040
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -040
14:07:35.189 2024-07-11T14:07:35.189 -04:00: : finesse1.dcloud.cisco.com: Jul 11 2024 14:07:35.233 -040
```


Related Information

Features Guide - Digital Channels Integration Using Webex Connect:

- **UCCE:**
  https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/icm_enter
  guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html
- **PCCE:**
  https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/pcce/pcce_12_6_2/mainte
  guide-1262/rcct_m_digital-channels-integration-webexconnect_12-6-2.html

Cisco Contact Center Enterprise Manage Digital Channels Gadget User Guide:

- https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/finesse/finesse_1262/user
  digital-channels/rcct_m_1262_manage-digital-channels.html

Administration and Setup Guide for Webex Engage with Cisco Contact Center Enterprise:

- https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/icm_enterprise/wxer

- **Cisco Contact Center Enterprise (CCE) integration with Webex Connect**
  https://help.imiconnect.io/docs/cce_overview