

# Release Notes for Cisco ASR 900 Series Routers, Cisco IOS XE 17.15.x

**First Published:** 2026-04-02

**Americas Headquarters**
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
http://www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED “AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: https://www.cisco.com/c/en/us/about/legal/trademarks.html. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2026 Cisco Systems, Inc. All rights reserved.



# CONTENTS

CHAPTER 1


**Introduction** 1

Overview of Cisco ASR 900 Series Routers 1

Cisco ASR 902 Router 1

Cisco ASR 903 Router 2

Cisco ASR 907 Router 2

Cisco ASR 914 Router 2

Feature Navigator 2

Hardware Support 3

Cisco ASR 902 Supported Interface Modules 3

A900-RSP2-Supported Interface Modules (ASR 902 Router) 3

A900-RSP3C-200-S Supported Interface Modules (ASR 902 Router) 5

Cisco ASR 903 Supported Interface Modules 5

A900-RSP2 Supported Interface Modules 5

A900-RSP3C-400-S Supported Interface Modules 7

A900-RSP3C-200-S Supported Interface Modules 9

Cisco ASR 907 Supported Interface Modules 11

Supported Interface Modules 11

Cisco ASR 914 Supported Interface Modules 13

Feature Matrix 13

Software Licensing Overview 13

Determining the Software Version 14

Upgrading to a New Software Release 14

Supported FPGA, HoFPGA, and ROMMON Versions for Cisco IOS XE 17.15.x Release 15

MIB Support 19

MIB Documentation 22

Additional References 22


CHAPTER 2 What's New for Cisco IOS XE 17.15.x 25

What's New in Hardware for IOS XE 17.15.5 25
What's New in Software for IOS XE 17.15.5 25
What's New in Hardware for IOS XE 17.15.4 26
What's New in Software for IOS XE 17.15.4 26
What's New in Hardware for IOS XE 17.15.3b 27
What's New in Software for IOS XE 17.15.3b 27
What's New in Hardware for IOS XE 17.15.2 28
What's New in Software for IOS XE 17.15.2 28
What's New in Hardware for IOS XE 17.15.1b 29
What's New in Software for IOS XE 17.15.1b 29
What's New in Hardware for IOS XE 17.15.1 32
What's New in Software for IOS XE 17.15.1 32

CHAPTER 3 Caveats 35

Open Caveats - Cisco IOS XE 17.15.5 35
Resolved Caveats - Cisco IOS XE 17.15.5 36
Open Caveats - Cisco IOS XE 17.15.4 36
Resolved Caveats - Cisco IOS XE 17.15.4 36
Open Caveats - Cisco IOS XE 17.15.3b 37
Resolved Caveats - Cisco IOS XE 17.15.3b 37
Open Caveats - Cisco IOS XE 17.15.2 37
Resolved Caveats - Cisco IOS XE 17.15.2 38
Open Caveats - Cisco IOS XE 17.15.1b 38
Resolved Caveats - Cisco IOS XE 17.15.1b 38
Open Caveats - Cisco IOS XE 17.15.1 39
Resolved Caveats - Cisco IOS XE 17.15.1 39
Cisco Bug Search Tool 39

CHAPTER 4 Restrictions and Limitations 41

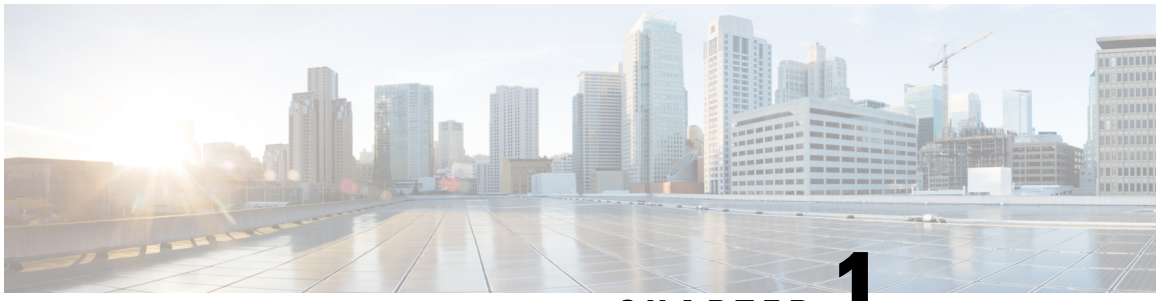

CHAPTER 1

# Introduction

The Cisco ASR 900 Series Routers are full-featured, modular aggregation platforms designed for the cost-effective delivery of converged mobile, residential, and business services. This document provides information about the IOS XE software release for the Cisco ASR 900 Series Routers.


- Overview of Cisco ASR 900 Series Routers , on page 1
- Feature Navigator, on page 2
- Hardware Support , on page 3
- Feature Matrix, on page 13
- Software Licensing Overview, on page 13
- Determining the Software Version , on page 14
- Upgrading to a New Software Release, on page 14
- Supported FPGA, HoFPGA, and ROMMON Versions for Cisco IOS XE 17.15.x Release, on page 15
- MIB Support, on page 19
- Additional References, on page 22


# Overview of Cisco ASR 900 Series Routers

The Cisco ASR 900 Series Router is a fully-featured routing platform designed for the cost-effective delivery of converged mobile and business services. With full redundancy, shallow depth, low power consumption and high service scale, this 3-rack-unit (3RU) router is optimized for small aggregation and remote point-of-presence (POP) applications. The Cisco ASR 900 Series Router provides a rich and scalable feature set of Legacy, Timing, Carrier Ethernet, Layer 2 VPN (L2VPN) and Layer 3 VPN (L3VPN) services in a compact package.

The Cisco ASR 900 Series Router is a fully modular platform with support for upto 6-Interface Modules (IMs), two Route Switch Processor (RSP) slots, two power supplies and redundant fans, based on the router model. Cisco offers a wide choice of LAN and WAN interfaces available in speeds ranging from nxDS0 to 10 Gigabit Ethernet. The design of the Cisco ASR 900 Series Router delivers in-box hardware redundancy for all hardware components and supports software redundancy with In Service Software Upgrade (ISSU) and Non-Stop Forwarding (NSF) support.

## Cisco ASR 902 Router

The Cisco ASR 902 Router is a full-featured aggregation platform designed for cost-effective delivery of converged mobile and business services. With shallow depth, low power consumption, and an extended

temperature range, this compact 2-rack unit (2RU) router provides high service scale and flexible hardware configuration.

## Cisco ASR 903 Router

The Cisco ASR 903 Series Aggregation Services Router is a Cisco aggregation router product. This router uses an innovative and powerful forwarding technology known as the Cisco Carrier Ethernet ASIC.

The Cisco ASR 903 Series Router is a 6-Interface Module (IM), 3-RU, hardware-redundant chassis with two Route Switch Processor (RSP) slots, and six IM slots. It supports fully redundant RSPs that allow for full RSP hardware redundancy, NSF, ISSU, and future RSP service upgrades.

## Cisco ASR 907 Router

The Cisco ASR 907 Router seven-rack (7RU) unit router that belongs to the Cisco ASR90x family of routers. This router complements Cisco's offerings for IP RAN solutions for the GSM, UMTS, LTE and CDMA. Given its form-factor, interface types and Gigabit Ethernet density the Cisco ASR 907 Router can also be positioned as a Carrier Ethernet aggregation platform.

The Cisco ASR 907 Router is a cost optimized, fully redundant, centralized forwarding, extended temperature, and flexible pre-aggregation router.

## Cisco ASR 914 Router

The Cisco ASR 914 Router is a 14-rack unit router that belongs to the Cisco ASR 900 family of routers. This router complements Cisco's offerings for IP RAN solutions for the GSM, UMTS, LTE, and CDMA. Given its form-factor, interface types and GigabitEthernet density the Cisco ASR 914 Router can also be positioned as a Carrier Ethernet aggregation platform.

The Cisco ASR 914 Router is a cost optimized, fully redundant, centralized forwarding, extended temperature, and flexible pre-aggregation router.

# Feature Navigator

You can use Cisco Feature Navigator to find information about feature, platform, and software image support. To access Cisco Feature Navigator, go to http://www.cisco.com/go/cfn. An account on cisco.com is not required.

# Hardware Support

## Cisco ASR 902 Supported Interface Modules

### A900-RSP2-Supported Interface Modules (ASR 902 Router)

*Table 1: A900-RSP2-Supported Interface Modules and Part Numbers*

| RSP | Interface Modules | Part Numbers | Slots |
|---|---|---|---|
| A900-RSP2A-128<br>A900U-RSP2A-128 | 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | All |
| | 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | |
| | 1-port 10-Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | |
| | 16-port T1/E1 Interface Module | A900-IMA16D | |
| | 4-port OC3/STM-1 (OC-3) or 1-port OC12/STM-4 (OC-12) Interface Module | A900-IMA4OS | |
| | SFP Combo IM—8-port Gigabit Ethernet (8x1GE) +<br>1-port 10-Gigabit Ethernet (1x10GE) | A900-IMA8S1Z | |
| | Copper Combo IM—8-port Gigabit Ethernet (8x1GE)<br>+ 1-port 10-Gigabit Ethernet Interface Module (1x10GE) | A900-IMA8T1Z | |
| | 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | |
| | 14-port Serial Interface Module | A900-IMASER14A/S | |

| RSP | Interface Modules | Part Numbers | Slots |
|---|---|---|---|
| | 4-port C37.94 Interface Module | A900-IMA4C3794 | |
| A900-RSP2A-64<br>A900U-RSP2A-64 | 1-port 10 Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | 0-2 |
| | 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | |
| | 4-port OC3/STM-1 (OC-3) or 1-port OC12/STM-4<br>(OC-12) Interface Module | A900-IMA4OS | |
| | 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | 0, 2 and 3 |
| | 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | |
| | 16-port T1/E1 Interface Module | A900-IMA16D | |
| | 32-port T1/E1 Interface Module | A900-IMA32D | |
| | 8-port T1/E1 Interface Module | A900-IMA8D | |
| | 6-port E & M Interface Module | A900-IMA6EM | |
| | 14-port Serial Interface Module | A900-IMASER14A/S | |
| | 4-port C37.94 Interface Module | A900-IMA4C3794 | |

## A900-RSP3C-200-S Supported Interface Modules (ASR 902 Router)

*Table 2: A900-RSP3C-200 Supported Interface Modules and Part Numbers*

| RSP Module | Supported Interface Modules | Part Numbers | Slot |
|---|---|---|---|
| A900-RSP3C-200-S | 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | All[1] |
| | 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | |
| | 1-port 10 Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | 0 and 1 |
| | SFP Combo IM—8-port Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet (1x10GE) | A900-IMA8S1Z | All |
| | Copper Combo IM—8-port Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet Interface Module (1x10GE) | A900-IMA8T1Z | |
| | 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | |
| | 8-port 10 Gigabit Ethernet Interface Module (8x10GE) | A900-IMA8Z | 0 |
| | 2-port 40 Gigabit Ethernet QSFP Interface Module (2x40GE) | A900-IMA2F | |

[1] There are restrictions using the interface modules in different slots with RSP3 module. Contact Cisco Sales/Support for the valid combinations..

# Cisco ASR 903 Supported Interface Modules

## A900-RSP2 Supported Interface Modules

A900-IMA2Z IM supports SFP+ and XFP on ports 0 and 1. Either SFP+ or XFP can be connected on each port. If both are connected on the same port, the port will go down.

The combination IMs (A900-IMA8S1Z, A900-IMA8T1Z) are not supported on the A900-RSP2-64 RSP module on the Cisco ASR 903 Router.

The table below is applicable for A900-RSP2A-128 and A900U-RSP2A-128 RSP modules.

*Table 3: A900-RSP2A-128 Supported Interface Modules and Part Numbers*

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| 1-port OC48/ STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-Port T1/E1 + 4-Port T3/E3 CEM Interface Module | A900-IMA3G-IMSG | 2,3,4,5 |
| 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | All |
| 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | |
| 1-port 10 Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | |
| 16-port T1/E1 Interface Module | A900-IMA16D | |
| 32-port T1/E1 Interface Module | A900-IMA32D | |
| 8-portT1/E1 Interface Module | A900-IMA8D | |
| 4-port OC3/STM-1 (OC-3) or 1-port OC12/STM-4 (OC-12) Interface Module | A900-IMA4OS | |
| SFP Combo IM—8-port SFP Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet (1x10GE) | A900-IMA8S1Z | |
| Copper Combo IM—8-port 10/100/1000 Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet Interface Module (1x10GE) | A900-IMA8T1Z | |
| 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | |
| 6-port E & M Interface Module | A900-IMA6EM | |
| 14-port Serial Interface Module | A900-IMASER14A/S | |
| 4-port C37.94 Interface Module | A900-IMA4C3794 | |

The table below is applicable for A900-RSP2A-64 and A900U-RSP2A-64 RSP modules.

*Table 4: A900-RSP2A-64 Supported Interface Modules and Part Numbers*

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| 1-port 10 Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | 0-2 |
| 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | |
| 4-port OC3/STM-1 (OC-3) or 1-port OC12/STM-4 (OC-12) Interface Module | A900-IMA4OS | |

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | 3-5 |
| 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | |
| 16-port T1/E1 Interface Module | A900-IMA16D | |
| 32-port T1/E1 Interface Module | A900-IMA32D | |
| 8-port T1/E1 Interface Module | A900-IMA8D | |
| 6-port E & M Interface Module | A900-IMA6EM | |
| 14-port Serial Interface Module | A900-IMASER14A/S | |
| 4-port C37.94 Interface Module | A900-IMA4C3794 | |

## A900-RSP3C-400-S Supported Interface Modules

The table below is applicable for A900-RSP3C-400-S RSP module.

**Note** If the **license feature service-offload enable** command is configured, then the following IMs are not supported in the router for RSP3:

- A900-IMA8S
- A900-IMA8T
- A900-IMA8S1Z
- A900-IMA8T1Z

**Note** There are certain restrictions in using the interface modules on different slots with RSP3 module. Contact Cisco Sales/Support for the valid combinations.

**Note** If there is any silicon oil leakage from the thermal pad of the RSP card, use a lint-free cloth moistened with IsoPropyl Alcohol (IPA) to thoroughly clean the affected area. Silicon oil leakage is an expected behaviour due to the material's properties. It is non-conductive, non-electrical, and poses no hazard to human health. The presence of silicon oil on the card is harmless and will not impact the card's functionality or system performance.

*Table 5: A900-RSP3C-400 Supported Interface Modules and Part Numbers*

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| 6-port E & M Interface Module | A900-IMA6EM | All |

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| 4-port C37.94 Interface Module | A900-IMA4C3794 | All |
| 14-port Serial Interface Module | A900-IMASER14A/S | All |
| 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | All |
| 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | All |
| 1-port 10 Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | All |
| SFP Combo IM—8-port SFP Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet (1x10GE) | A900-IMA8S1Z | All |
| Copper Combo IM—8-port 10/100/1000 Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet Interface Module (1x10GE) | A900-IMA8T1Z | All |
| 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | All |
| 8-port 10 Gigabit Ethernet Interface Module (8x10GE) | A900-IMA8Z | All |
| 1-port 100 Gigabit Ethernet Interface Module (1x100GE) | A900-IMA1C | 4 or 5 |
| 2-port 100 Gigabit Ethernet (QSFP) Interface Module (2x100GE) | N560-IMA2C/A900-IMA2C | 4 and 5[2] |
| 2-port 40 Gigabit Ethernet QSFP Interface Module (2x40GE) | A900-IMA2F | 4 or 5 |
| 8/16-port 1 Gigabit Ethernet (SFP/SFP) + 1-port 10 Gigabit Ethernet (SFP+) / 2-port 1 Gigabit Ethernet (CSFP) Interface Module | A900-IMA8CS1Z-M | 0,3,4 or 5 |
| 48-port T1/E1 Interface module | A900-IMA48D-C | All |
| 48-port T3/E3 Interface module | A900-IMA48T-C | All |
| 1-port OC-192 or 8-Port Low Rate CEM Interface Module | A900-IMA8S1Z-CX | 2,3,4,5 |
| 4-port OC-48/OC-12/OC-3 + 12-Port A900-IMA3G-IMSG T1/E1 + 4-Port T3/E3 CEM Interface Module | A900-IMA3G-IMSG | 2,3,4,5 |

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| ASR 900 1-Port OC-192 or 8-Port Low Rate CEM 20G Bandwidth Interface Module | A900-IMA1Z8S-CXMS | 2, 3, 4, 5[3]<br>**Note** To enable this IM on slot 0 or slot 1, do the following and reload the router:<br>`Router# configure t`<br>`Router(config)# license feature service-offload enable` |

[2] IM supports only one port of 100G with RSP3 as QSFP28 on Port 0 in both slots 4 and 5.
[3] These slots are supported on 10G or 20G mode.

## A900-RSP3C-200-S Supported Interface Modules

The table below is applicable for A900-RSP3C-200-S RSP module.

**Note** If the **license feature service-offload enable** command is configured, then the following IMs are not supported in the router for RSP3:

- A900-IMA8S
- A900-IMA8T
- A900-IMA8S1Z
- A900-IMA8T1Z

**Note** There are certain restrictions in using the interface modules on different slots with RSP3 module. Contact Cisco Sales/Support for the valid combinations.

**Note** FAN OIR is applicable every time the IM based fan speed profile is switched to the IMA1C and IMA2F interface modules. Even though the IMs remain in the Out-of-Service state, they are still considered as present in the chassis.

**Note** If there is any silicon oil leakage from the thermal pad of the RSP card, use a lint-free cloth moistened with IsoPropyl Alcohol (IPA) to thoroughly clean the affected area. Silicon oil leakage is an expected behaviour due to the material's properties. It is non-conductive, non-electrical, and poses no hazard to human health. The presence of silicon oil on the card is harmless and will not impact the card's functionality or system performance.

***Table 6: A900-RSP3C-200 Supported Interface Modules and Part Numbers***

| Supported Interface Modules | Part Numbers | Slot |
|---|---|---|
| 8-port Gigabit Ethernet SFP Interface Module (8x1GE) | A900-IMA8S | All |
| 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8x1GE) | A900-IMA8T | |
| 1-port 10 Gigabit Ethernet XFP Interface Module (1x10GE) | A900-IMA1X | 0, 2 or 4 |
| SFP Combo IM—8-port SFP Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet (1x10GE) | A900-IMA8S1Z | 1-5[4] |
| Copper Combo IM—8-port 10/100/1000 Gigabit Ethernet (8x1GE) + 1-port 10 Gigabit Ethernet Interface Module (1x10GE) | A900-IMA8T1Z | 0-4 |
| 2-port 10 Gigabit Ethernet Interface Module (2x10GE) | A900-IMA2Z | |
| 8-port 10 Gigabit Ethernet Interface Module (8x10GE) | A900-IMA8Z | 4 |
| 2-port 40 Gigabit Ethernet QSFP Interface Module (2x40GE) | A900-IMA2F | 4 |
| 4-port OC-48/OC-12/OC-3 + 12-Port A900-IMA3G-IMSG T1/E1 + 4-Port T3/E3 CEM Interface Module | A900-IMA3G-IMSG | 2-5[5] |
| 8-Port 10 Gigabit Ethernet (8x10GE) SFP+ Interface Module with Conformal Coating | [6]ASR900-IMA8Z-CC | 0 |

[4] If you have a 1-port 10G IM in slot 0, then SFP combo may not be supported in slot 5.
[5] If slot 0 has 8X10G IM and you want to insert IMA-3G-IMSG to slot 5, then insert 8X10G IM on slot 6, by using the **hw-module subslot 0/0 A900-IMA8Z mode 6-Port** command.
[6] Supported only from release XE-17.13.1 onwards.

# Cisco ASR 907 Supported Interface Modules

## Supported Interface Modules

**Note** If the **license feature service-offload enable** command is configured, then the following IMs are not supported in the router for RSP3:

- A900-IMA8S
- A900-IMA8T
- A900-IMA8S1Z
- A900-IMA8T1Z

**Note** There are certain restrictions in using the interface modules on different slots in the chassis. Contact Cisco Sales and Support for the valid combinations.

*Table 7: A900-RSP3 Supported Interface Modules and Part Numbers*

| RSP Module | Interface Modules | Part Number | Slot |
|---|---|---|---|
| A900-RSP3C-400-W | 8-port Gigabit Ethernet SFP Interface Module (8X1GE) | A900-IMA8S | 0,1,2,5,6,9,10,13,14,15 |
| | 8-port Gigabit Ethernet RJ45 (Copper) Interface Module (8X1GE) | A900-IMA8T | 0,1,2,5,6,9,10,13,14,15 |
| | 1-port 10 Gigabit Ethernet XFP Interface Module (1X10GE) | A900-IMA1X | Not Supported |
| | SFP Combo IM—8-port Gigabit Ethernet (8X1GE) + 1-port 10 Gigabit Ethernet (1X10GE) | ASR900-IMA8S1Z | 2,5,6,9,10,13,14,15 |
| | Copper Combo IM—8-port Gigabit Ethernet (8X1GE) + 1-port 10 Gigabit Ethernet Interface Module (1X10GE) | ASR900-IMA8T1Z | 2,5,6,9,10,13,14,15 |
| | 2-port 10 Gigabit Ethernet Interface Module (2X10GE) | ASR900-IMA2Z | 3,4,7,8,11,12 |
| | 16-port T1/E1 Interface Module | A900-IMA16D | Not Supported |
| | 14-port Serial Interface Module | A900-IMASER14A/S | 3,4,7,8,11,12[7] |
| | 8-port T1/E1 Interface Module | A900-IMA8D | Not Supported |

| RSP Module | Interface Modules | Part Number | Slot |
|---|---|---|---|
| | 32-port T1/E1 Interface Module | A900-IMA32D | Not Supported |
| | 1x100G Interface module | A900-IMA1C | 7 and 8 |
| | 2-port 100 Gigabit Ethernet (QSFP) Interface Module (2X100GE) | A900-IMA2C | 7 and 8[8] |
| | 2x40G Interface module | A900-IMA2F | 3,4,7,8,11,12 |
| | 8x10G Interface module | A900-IMA8Z[9] | 3,4,7,8,11,12 |
| | 8/16-port 1 Gigabit Ethernet (SFP/SFP) + 1-port 10 Gigabit Ethernet (SFP+) / 2-port 1 Gigabit Ethernet (CSFP) Interface Module | A900-IMA8CS1Z-M | 0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15 |
| | 1-port OC-192 or 8-Port Low Rate CEM Interface Module | A900-IMA8S1Z-CX | 3,4,7,8,11,12 (10 G Mode)<br>0,1,2,5,6,9,10,13,14,15 (5 G Mode) |
| | 48-port T1/E1 Interface module | A900-IMA48D-C | 2,3,4,5,6,7,8,9,10,11,12,13,14,15 |
| | 48-port T3/E3 Interface module | A900-IMA48T-C | 2,3,4,5,6,7,8,9,10,11,12,13,14,15 |
| | 1-port OC48/ STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-Port T1/E1 + 4-Port T3/E3 CEM Interface Module | A900-IMA3G-IMSG | 3,5,7,9,11,13,15 |
| | ASR 900 1-Port OC-192 or 8-Port Low Rate CEM 20G Bandwidth Interface Module | A900-IMA1Z8S-CXMS | 3, 7, 11[10]<br>4, 8, 12[11]<br>5, 9, 13, 15[12]<br>**Note** To enable this IM on slot 0 or slot 1, do the following and reload the router:<br>`Router# configure t`<br>`Router(config)# license feature service-offload enable` |
| | 6-port E&M Module | A900-IMA6EM | All slots |
| | 4-port C37.94 Interface Module | A900-IMA4C3794 | All slots |

[7] The serial IM will not work on slots 11 and 12, if the IMs A900-IMA8T or A900-IMA8S is inserted on any slot in the router.
[8] The IMs A900-IMA6EM, A900-IMASER14A/S, and A900-IMA4C3794 can be installed in slots 3, 4, 7, 8, 11, 12. Slots 3, 4 and 11, 12 have dependency with 1 Gigabit Ethernet IMs. These IMs can be placed in slots 3 only if Gigabit Ethernet IM is

not present in slot 5. These IMs can be placed in slots 4 only if Gigabit Ethernet IM is not present in slot 6. These IMs can be placed in slots 11 only if Gigabit Ethernet IM is not present in slots 1, 5, 9, 13, and 15. These IMs can be placed in slots 12 only if Gigabit Ethernet IM is not present in slots 0,2,6,10 and 14.

9 Six IM slots are supported with various combinations but only five IM slots are functional at a time.

10 These slots are supported on 10G or 20G mode.

11 These slots are supported on 10G or 20G mode, only if the adjacent odd slots are empty.

12 These slots are supported on 10G mode.

## Cisco ASR 914 Supported Interface Modules

For information in interface modules supported, see Cisco A900-RSP3C-400-W Supported Interface Modules.

# Feature Matrix

The feature matrix lists the features that are supported for each platform.

# Software Licensing Overview

The router offers the following base licenses:

- Metro Services
- Metro IP Services
- Metro Aggregation Services

**Note** Starting with Cisco IOS XE Cupertino 17.7.1, licenses are not enabled by default. We recommend that you move to Smart Licensing.

### Smart Licensing

Starting with Cisco IOS XE Cupertino 17.7.1, PAK licenses are no longer available. When you purchase the Cisco IOS XE Cupertino 17.7.1 release or later, Smart Licensing is enabled by default. We recommend that you move to Smart Licensing before upgrading to Cisco IOS XE Cupertino 17.7.1 or a higher release, for a seamless experience.

If you are using Cisco IOS XE Bengaluru 17.6.1 or an earlier release version, Smart Licensing is not enabled by default. To enable Smart Licensing, see Software Activation Configuration Guide (Cisco IOS XE ASR 900 Series).

*Table 8: Cisco ASR 900 Software Licenses Feature Set*

| Metro Services | Metro IP Services | Metro Aggregation Services |
|---|---|---|
| — | Includes all features in Metro Services | Includes all features in Metro IP Services |

| Metro Services | Metro IP Services | Metro Aggregation Services |
|---|---|---|
| QoS, with deep buffers and hierarchical QoS (HQOS) | IP routing (RIP, OSPF, EIGRP, BGP, IS-IS) | MPLS (LDP and VPN) |
| Layer 2: 802.1d, 802.1q | PIM (SM, DM, SSM), SSM mapping | MPLS TE and FRR |
| Ethernet Virtual Circuit (EVC) | BFD | MPLS OAM |
| Ethernet OAM (802.1ag, 802.3ah) | Multi-VRF CE (VRF lite) with service awareness (ARP, ping, SNMP, syslog, trace-route, FTP, TFTP) | MPLS-TP |
| Multiple Spanning Tree (MST) and Resilient Ethernet Protocol (REP) | IEEE 1588-2008 Ordinary Slave Clock and Transparent Clock | Pseudowire emulation (EoMPLS, CESoPSN, and SAToP) |
| Synchronous Ethernet | — | VPLS and HVPLS |
| IPv4 and IPv6 host connectivity | — | Pseudowire redundancy |
| — | — | MR-APS and mLACP |

The router offers the following additional feature licenses:

- ATM
- IEEE 1588-2008 Boundary Clock/Master Clock
- OCx-overview- Port License

**Note** These features require a software license to use.

# Determining the Software Version

You can use the following commands to verify your software version:

- Consolidated Package—**show version**
- Individual sub-packages—**show version installed** (lists all installed packages)

# Upgrading to a New Software Release

Only the latest consolidated packages can be downloaded from Cisco.com; users who want to run the router using individual subpackages must first download the image from Cisco.com and extract the individual subpackages from the consolidated package.

For information about upgrading to a new software release, see the Upgrading the Software on the Cisco ASR 900 Series Routers .

### Upgrading the FPD Firmware

FPD Firmware packages are bundled with the software package. FPD upgrade is automatically performed ont the router.

If you like to manually change the FPD Firmware software, use the **upgrade hw-module subslot 0/0 fpd bundle** to perform FPD frmware upgrade.

### ROMMON Version

We recommend you to upgrade the ROMMON version for RSP2 and RSP3 modules:

- 15.6(49r)S for RSP3-400S, RSP3-400W
- 15.6(48r)S for RSP2-128

For more information on the ROMMON package, see Cisco Software Download.

**Note** ROMMON upgrade is mandatory to boot RSP3 images.

# Supported FPGA, HoFPGA, and ROMMON Versions for Cisco IOS XE 17.15.x Release

Use the **show hw-module all fpd** command to display the IM FPGA version on the router.

The below table lists the FPGA version for the software releases.

**Note** If there is an FPGA upgrade during ISSU, it will cause traffic disruption. TDM interface modules get reset irrespective of FPGA upgrade during the ISSU.

***Table 9: IM FPGA Versions for Ethernet Phase 3 IM***

| Cisco IOS XE Release | IO FGPA | 8 x10 FPGA | 2x40 FPGA | 1x100 FPGA |
|---|---|---|---|---|
| 17.15.5 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.15.4 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.15.3b | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.15.2 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.15.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.15.1b | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.13.1 | 0x34 | 0.21 | 0.22 | 0.20 |

| Cisco IOS XE Release | IO FGPA | 8 x10 FPGA | 2x40 FPGA | 1x100 FPGA |
|---|---|---|---|---|
| 17.12.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.11.1a | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.10.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.9.2 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.9.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.8.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.7.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.6.1 | 0x34 | 0.21 | 0.22 | 0.20 |
| 17.5.1 | 0x34 | 0.21 | 0.22 | 0.20 |

*Table 10: CEM and IM FPGA Versions for ASR 903 RSP3 and ASR 907*

| Category | Release | 48-port T1/E1 CEM Interface Module FPGA (A900-IMA48D-C) | 48-port T3/E3 CEM Interface Module FPGA (A900-IMA48T-C) | 1-port OC-192 Interface Module + 8-port Low Rate Interface Module FPGA (A900-IMA8S1Z-CX) | 1-port OC-48/STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-port T1/E1 + 4-port T3/E3 CEM Interface Module (A900-IMA3G-IMSG) | ASR 900 1-Port OC-192 or 8-Port Low Rate CEM 20G Bandwidth Interface Module (A900-IMA1Z8S-CXMS) |
|---|---|---|---|---|---|---|
| IM FPGA | Cisco IOS XE 17.15.5 | 1.22 | 1.22 | 1.15 | 2.1 | 0.95 |
| CEM FPGA | | 70160070 | CAS: 72020072<br>Non-CAS: 56030056 | 5G mode:<br>10090065<br>10G mode:<br>10070079 | CAS: 10930095<br>Non-CAS: 11060093 | 20G CAS: 10330075<br>10G and 20G Non-CAS: 12290074 |
| IM FPGA | Cisco IOS XE 17.15.4 | 1.22 | 1.22 | 1.15 | 2.1 | 0.95 |
| CEM FPGA | | 70160070 | CAS: 72020072<br>Non-CAS: 56030056 | 5G mode:<br>10090065<br>10G mode:<br>10070079 | CAS: 10930095<br>Non-CAS: 11060093 | 20G CAS: 10330075<br>10G and 20G Non-CAS: 12290074 |

| Category | Release | 48-port T1/E1 CEM Interface Module FPGA (A900-IMA48D-C) | 48-port T3/E3 CEM Interface Module FPGA (A900-IMA48T-C) | 1-port OC-192 Interface Module + 8-port Low Rate Interface Module FPGA (A900-IMA8S1Z-CX) | 1-port OC-48/STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-port T1/E1 + 4-port T3/E3 CEM Interface Module (A900-IMA3G-IMSG) | ASR 900 1-Port OC-192 or 8-Port Low Rate CEM 20G Bandwidth Interface Module (A900-IMA1Z8S-CXMS) |
|---|---|---|---|---|---|---|
| IM FPGA | Cisco IOS XE 17.15.3b | 1.22 | 1.22 | 1.15 | 2.1 | 0.95 |
| CEM FPGA | | 70160070 | CAS: 72020072<br>Non-CAS: 56030056 | 5G mode: 10090065<br>10G mode: 10070079 | CAS: 10930095<br>Non-CAS: 11060093 | 20G CAS: 10330075<br>10G and 20G Non-CAS: 12290074 |
| IM FPGA | Cisco IOS XE 17.15.2 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 70160070 | CAS: 72020072<br>Non-CAS: 56030056 | 5G mode: 10090065<br>10G mode: 10070079 | CAS: 10930095<br>Non-CAS: 11060093 | 20G CAS: 10330075<br>10G and 20G Non-CAS: 12290074 |
| IM FPGA | Cisco IOS XE 17.15.1b | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 70160070 | CAS: 72020072<br>Non-CAS: 56030056 | 5G mode: 10090065<br>10G mode: 10070079 | CAS: 10930095<br>Non-CAS: 11060093 | 20G CAS: 10330075<br>10G and 20G Non-CAS: 12290074 |
| IM FPGA | Cisco IOS XE 17.15.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 70160070 | CAS: 72020072<br>Non-CAS: 56030056 | 5G mode: 10090065<br>10G mode: 10070079 | CAS: 10930095<br>Non-CAS: 11060093 | 20G CAS: 10330075<br>10G and 20G Non-CAS: 12290074 |
| IM FPGA | Cisco IOS XE 17.13.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 70140070 | CAS: 72010072<br>Non-CAS: 56020056 | 5G mode: 10090065<br>10G mode: 10070079 | CAS: 10810095<br>Non-CAS: 10950093 | 20G CAS: 10240075<br>10G and 20G Non-CAS: 11160074 |

| Category | Release | 48-port T1/E1 CEM Interface Module FPGA (A900-IMA48D-C) | 48-port T3/E3 CEM Interface Module FPGA (A900-IMA48T-C) | 1-port OC-192 Interface Module + 8-port Low Rate Interface Module FPGA (A900-IMA8S1Z-CX) | 1-port OC-48/STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-port T1/E1 + 4-port T3/E3 CEM Interface Module (A900-IMA3G-IMSG) | ASR 900 1-Port OC-192 or 8-Port Low Rate CEM 20G Bandwidth Interface Module (A900-IMA1Z8S-CXMS) |
|---|---|---|---|---|---|---|
| IM FPGA | Cisco IOS XE 17.12.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 7.0 | 7.2 | 5G mode: 6.5<br>10G mode: 7.9 | 9.3 | 10G mode: 7.4<br>20G mode: 7.5 |
| IM FPGA | Cisco IOS XE 17.11.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 7.0 | 5.6 | 5G mode: 6.5<br>10G mode: 7.9 | 9.3 | 10G mode: 7.4<br>20G mode: 7.5 |
| IM FPGA | Cisco IOS XE 17.10.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 6.0 | 5.2 | 5G mode: 6.5<br>10G mode: 7.9 | 9.3 | 10G mode: 7.3<br>20G mode: 7.3 |
| IM FPGA | Cisco IOS XE 17.9.2 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 6.0 | 5.2 | 5G mode: 6.5<br>10G mode: 7.9 | 9.1 | 10G mode: 7.2<br>20G mode: 7.2 |
| IM FPGA | Cisco IOS XE 17.9.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.95 |
| CEM FPGA | | 6.0 | 5.2 | 5G mode: 6.5<br>10G mode: 7.9 | 9.1 | 10G mode: 7.2<br>20G mode: 7.2 |
| IM FPGA | Cisco IOS XE 17.8.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.93 |
| CEM FPGA | | 6.0 | 5.2 | 5G mode: 6.5<br>10G mode: 7.9 | 9.0 | 10G mode: 7.0<br>20G mode: 6.0 |
| IM FPGA | Cisco IOS XE 17.7.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.93 |
| CEM FPGA | | 0x52110052 | 0x52510052 | 5G mode: 0x10090065<br>10G mode: 0x10070079 | 0x10030076 | 10G mode: 0x 10290051<br>20G mode: 0x 10290051 |

| Category | Release | 48-port T1/E1 CEM Interface Module FPGA (A900-IMA48D-C) | 48-port T3/E3 CEM Interface Module FPGA (A900-IMA48T-C) | 1-port OC-192 Interface Module + 8-port Low Rate Interface Module FPGA (A900-IMA8S1Z-CX) | 1-port OC-48/STM-16 or 4-port OC-12/OC-3 / STM-1/STM-4 + 12-port T1/E1 + 4-port T3/E3 CEM Interface Module (A900-IMA3G-IMSG) | ASR 900 1-Port OC-192 or 8-Port Low Rate CEM 20G Bandwidth Interface Module (A900-IMA1Z8S-CXMS) |
|---|---|---|---|---|---|---|
| IM FPGA | Cisco IOS XE 17.6.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.93 |
| CEM FPGA | | 0x52110052 | 0x52520052 | 5G mode: 0x10090065<br>10G mode: 0x10070079 | 0x10030076 | 10G mode: 0x 10290051<br>20G mode: 0x 10290051 |
| IM FPGA | Cisco IOS XE 17.5.1 | 1.22 | 1.22 | 1.15 | 2.00 | 0.93 |
| CEM FPGA | | 0x52050052 | 0x52420052 | 5G mode: 0x10210063<br>10G mode: 0x10530078 | 0x10020076 | 10G mode: 0x10090051<br>20G mode: 0x10090051 |

***Table 11: FPGA, HoFPGA, and ROMMON Versions for Cisco IOS XE 17.15.1 Release***

| Platform | Interface Module | FPGA Current Version | FPGA Minimum Required Version | RSP HoFPGA Active | RSP HoFPGA Standby | ROMMON |
|---|---|---|---|---|---|---|
| RSP2-128 | A900-IMA2Z | 69.24 | 69.24 | 0X00030011 | 0X00030011 | 15.6(54r)S |
| | A900-IMA8S | 0.75 | 0.75 | | | |
| | A900-IMA8T1Z | 69.32 | 69.32 | | | |
| RSP3-400S | A900-IMA1C | 0.2 | 0.20 | 19052734 | 19052734 | 15.6(57r)S |
| | A900-IMA8Z | 0.21 | 0.21 | | | |
| | A900-IMA8S1Z | 69.32 | 69.32 | | | |
| RSP3-400W | A900-IMA1C | 0.2 | 0.20 | 19052734 | 19052734 | 15.6(57r)S |
| | A900-IMA2Z | 69.24 | 69.24 | | | |

# MIB Support

The below table summarizes the supported MIBs on the Cisco ASR 900 Series Router.

*Table 12: Supported MIBs*

| **Supported MIBs** | | |
|---|---|---|
| BGP4-MIB (RFC 1657) | CISCO-IMAGE-LICENSE-MGMT-MIB | MPLS-LDP-STD-MIB (RFC 3815) |
| CISCO-BGP-POLICY-ACCOUNTING-MIB | CISCO-IMAGE-MIB | MPLS-LSR-STD-MIB (RFC 3813) |
| CISCO-BGP4-MIB | CISCO-IPMROUTE-MIB | MPLS-TP-MIB |
| CISCO-BULK-FILE-MIB | CISCO-LICENSE-MGMT-MIB | MSDP-MIB |
| CISCO-CBP-TARGET-MIB | CISCO-MVPN-MIB | NOTIFICATION-LOG-MIB (RFC 3014) |
| CISCO-CDP-MIB | CISCO-NETSYNC-MIB | OSPF-MIB (RFC 1850) |
| CISCO-CEF-MIB | CISCO-OSPF-MIB | OSPF-TRAP-MIB (RFC 1850) |
| CISCO-CLASS-BASED-QOS-MIB | CISCO-OSPF-TRAP-MIB | PIM-MIB (RFC 2934) |
| CISCO-CONFIG-COPY-MIB | CISCO-PIM-MIB | RFC1213-MIB |
| CISCO-CONFIG-MAN-MIB | CISCO-PROCESS-MIB | RFC2982-MIB |
| CISCO-DATA-COLLECTION-MIB | CISCO-PRODUCTS-MIB | RMON-MIB (RFC 1757) |
| CISCO-EMBEDDED-EVENT-MGRMIB | CISCO-PTP-MIB | RSVP-MIB |
| CISCO-ENHANCED-MEMPOOL-MIB | CISCO-RF-MIB | SNMP-COMMUNITY-MIB (RFC 2576) |
| CISCO-ENTITY-ALARM-MIB | CISCO-RTTMON-MIB | SNMP-FRAMEWORK-MIB (RFC 2571) |
| CISCO-ENTITY-EXT-MIB | CISCO-SONET-MIB | SNMP-MPD-MIB (RFC 2572) |
| CISCO-ENTITY-FRU-CONTROLMIB | CISCO-SYSLOG-MIB | SNMP-NOTIFICATION-MIB (RFC 2573) |
| CISCO-ENTITY-SENSOR-MIB | DS1-MIB (RFC 2495) | SNMP-PROXY-MIB (RFC 2573) |
| CISCO-ENTITY-VENDORTYPE-OID-MIB | ENTITY-MIB (RFC 4133) | SNMP-TARGET-MIB (RFC 2573) |
| CISCO-FLASH-MIB | ENTITY-SENSOR-MIB (RFC 3433) | SNMP-USM-MIB (RFC 2574) |
| CISCO-FTP-CLIENT-MIB | ENTITY-STATE-MIB | SNMPv2-MIB (RFC 1907) |
| CISCO-IETF-ISIS-MIB | EVENT-MIB (RFC 2981) | SNMPv2-SMI |
| CISCO-IETF-PW-ATM-MIB | ETHERLIKE-MIB (RFC 3635) | SNMP-VIEW-BASED-ACM-MIB (RFC 2575) |
| CISCO-IETF-PW-ENET-MIB | IF-MIB (RFC 2863) | SONET-MIB |
| CISCO-IETF-PW-MIB | IGMP-STD-MIB (RFC 2933) | TCP-MIB (RFC 4022) |
| CISCO-IETF-PW-MPLS-MIB | IP-FORWARD-MIB | TUNNEL-MIB (RFC 4087) |
| CISCO-IETF-PW-TDM-MIB | IP-MIB (RFC 4293) | UDP-MIB (RFC 4113) |

| | | |
|---|---|---|
| CISCO-IF-EXTENSION-MIB | IPMROUTE-STD-MIB (RFC 2932) | CISCO-FRAME-RELAY-MIB |
| CISCO-IGMP-FILTER-MIB | MPLS-LDP-GENERIC-STD-MIB (RFC 3815) | IF-MIB |
| CISCO-AAA-SERVER-MIB | — | — |

***Table 13: Unverified MIBs***

| **Unverified MIBs** | | |
|---|---|---|
| ATM-MIB | CISCO-IETF-DHCP-SERVER-EXT-MIB | EXPRESSION-MIB |
| CISCO-ATM-EXT-MIB | — | HC-ALARM-MIB |
| CISCO-ATM-IF-MIB | CISCO-IETF-PPVPN-MPLS-VPN-MIB | HC-RMON-MIB |
| CISCO-ATM-PVC-MIB | CISCO-IP-STAT-MIB | IEEE8021-CFM-MIB |
| CISCO-ATM-PVCTRAP-EXTN-MIB | CISCO-IPSLA-ETHERNET-MIB | IEEE8021-CFM-V2-MIB |
| CISCO-BCP-MIB | CISCO-L2-CONTROL-MIB | IEEE8023-LAG-MIB |
| CISCO-CALLHOME-MIB | CISCO-LAG-MIB | INT-SERV-GUARANTEED-MIB |
| CISCO-CIRCUIT-INTERFACE-MIB | CISCO-MAC-NOTIFICATION-MIB | INTEGRATED-SERVICES-MIB |
| CISCO-CONTEXT-MAPPING-MIB | CISCO-MEMORY-POOL-MIB | MPLS-L3VPN-STD-MIB (RFC 4382) |
| CISCO-EIGRP-MIB | CISCO-NHRP-EXT-MIB | MPLS-LDP-ATM-STD-MIB (RFC 3815) |
| CISCO-ERM-MIB | CISCO-NTP-MIB | MPLS-LDP-MIB |
| CISCO-ETHER-CFM-MIB | CISCO-PING-MIB | MPLS-TE-STD-MIB |
| CISCO-ETHERLIKE-EXT-MIB | CISCO-RESILIENT-ETHERNET-PROTOCOL-MIB | MPLS-VPN-MIB |
| CISCO-EVC-MIB | CISCO-RTTMON-ICMP-MIB | NHRP-MIB |
| CISCO-HSRP-EXT-MIB | CISCO-RTTMON-IP-EXT-MIB | RFC2006-MIB (MIP) |
| CISCO-HSRP-MIB | CISCO-RTTMON-RTP-MIB | RMON2-MIB (RFC 2021) |
| CISCO-IETF-ATM2-PVCTRAP-MIB | CISCO-SNMP-TARGET-EXT-MIB | SMON-MIB |
| CISCO-IETF-ATM2-PVCTRAP-MIBEXTN | CISCO-TCP-MIB | VRRP-MIB |
| CISCO-IETF-BFD-MIB | CISCO-VRF-MIB | — |
| CISCO-IETF-DHCP-SERVER-MIB | ETHER-WIS (RFC 3637) | — |

# MIB Documentation

The following resources provide more detail about MIBs on the Cisco ASR 900 Series Router:

- Cisco ASR 900 Series Router MIB Guide—For information about the Cisco ASR 903 Series Router product implementation of the MIB protocol, see *Cisco ASR 903 Series Aggregation Services Router MIB Specifications Guide* at the following location:

  http://www.cisco.com/c/en/us/td/docs/wireless/asr_900/mib/guide/asr903mib.html

- MIB Locator—To locate and download MIBs for selected platforms, Cisco IOS and Cisco IOS XE releases, and feature sets, use Cisco MIB Locator found at the following location:

  https://snmp.cloudapps.cisco.com/Support/SNMP/do/BrowseOID.do?local=en

# Additional References

### Product Information

- Cisco ASR 900 Series Aggregation Services Routers Data Sheets

### Hardware Installation Guides

- Cisco ASR 900 Series Aggregation Services Routers Hardware Guides

### Software Configuration Guides

- Cisco ASR 900 Series Aggregation Services Routers Configuration Guides

### Regulatory Compliance and Safety Information

- Regulatory Compliance and Safety Information for the Cisco ASR 900 Series Aggregation Services Routers

### Field Notices and Bulletins

- Field Notices—We recommend that you view the field notices for this release to determine whether your software or hardware platforms are affected. You can find field notices at http://www.cisco.com/en/US/support/tsd_products_field_notice_summary.html.
- Bulletins—You can find bulletins at http://www.cisco.com/en/US/products/sw/iosswrel/ps5012/prod_literature.html.


### Accessibility Features in the Cisco ASR 900 Series Routers

For a list of accessibility features in Cisco ASR 900 Series Routers, see the Voluntary Product Accessibility Template (VPAT) on the Cisco website, or contact accessibility@cisco.com.

All product documents are accessible except for images, graphics, and some charts. If you would like to receive the product documentation in audio format, braille, or large print, contact accessibility@cisco.com.

### End-of-Life and End-of-Sale Notices

For End-of-Life and End-of-Sale Notices for the Cisco ASR 900 Series Routers, see https://www.cisco.com/c/en/us/products/routers/asr-903-series-aggregation-services-routers/eos-eol-notice-listing.html.

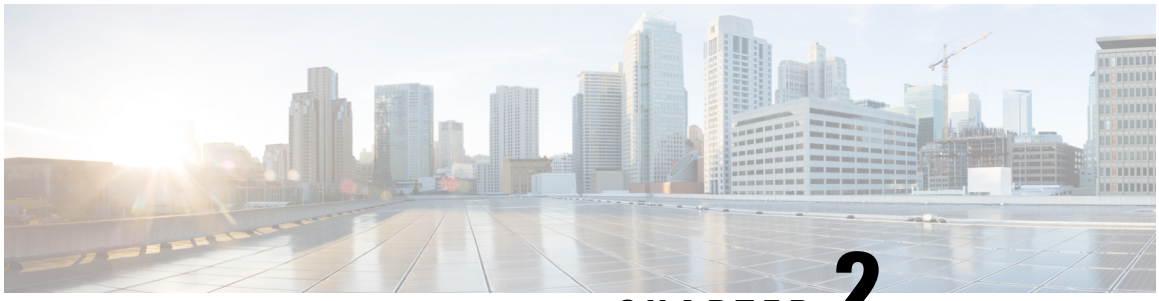

CHAPTER 2

# What's New for Cisco IOS XE 17.15.x


- What's New in Hardware for IOS XE 17.15.5, on page 25
- What's New in Software for IOS XE 17.15.5, on page 25
- What's New in Hardware for IOS XE 17.15.4, on page 26
- What's New in Software for IOS XE 17.15.4, on page 26
- What's New in Hardware for IOS XE 17.15.3b, on page 27
- What's New in Software for IOS XE 17.15.3b, on page 27
- What's New in Hardware for IOS XE 17.15.2, on page 28
- What's New in Software for IOS XE 17.15.2, on page 28
- What's New in Hardware for IOS XE 17.15.1b, on page 29
- What's New in Software for IOS XE 17.15.1b, on page 29
- What's New in Hardware for IOS XE 17.15.1, on page 32
- What's New in Software for IOS XE 17.15.1, on page 32


## What's New in Hardware for IOS XE 17.15.5

There are no new hardware features introduced for this release.

## What's New in Software for IOS XE 17.15.5

***Table 14: Table 1. Feature History***

| Feature | Description |
|---|---|
| **Alarms** | |
| Support for New Alarm profile based on the Telcordia ATT profile for chassis | The new alarm profile based on Telcordia, telcordia_att profile, includes "Service Affecting and severity" information for chassis entities. This information enables you to check the service affecting and severity state for each alarm under a chassis. |
| New SONET or SDH port alarm support | Support to generate mismatch alarm when SFP port is provisioned with incorrect rate. |
| **BERT** | |

| Feature | Description |
|---|---|
| Support on framed system BERT in 3GMS T1 port to display warning message on traffic loss | From 17.15.4, system BERT is enabled on 3GMS T1 or E1 port. For 3GMS T1, when a system BERT is enabled or disabled on the T1 controller, there might be some traffic loss with following warning message:<br>• When BERT is configured in one T1 port will impact traffic momentarily on other 11 T1 ports<br>• When BERT is unconfigured in one T1 port will impact traffic momentarily on other 11 T1 ports |
| **OCx** | |
| Support for New CLI to modify the PMON statistics collection interval on SONET | The Performance Monitor (PMON) statistics collection interval on SONET is currently set to 10 seconds. A new CLI command is introduced to change this interval to 5 seconds.<br>**hw-module** *slot/bay* **enable-5s-pmon-polling** |
| **Ethernet OAM** | |
| Enhancement in Ethernet OAM for PCS errors | Support to change current physical coding sublayer (PCS) monitoring frequency from 1 second to default 300 seconds. You can configure from 1 to 900 seconds. |
| **System Management** | |
| Support to simulate MBE error on both active and standby RSPs | Hardware faults in the RSP card causes multi-bit errors (MBEs) leading to device instability. This feature supports to detect and handle MBEs, generate alarms, support RMA processes, and maintain safe operations.<br>Use the following CLI command to enable the feature on both active and standby RSPs:<br>**platform software qdr-mbe enable** |

# What's New in Hardware for IOS XE 17.15.4

There are no new hardware features introduced for this release.

# What's New in Software for IOS XE 17.15.4

***Table 15: Feature History***

| Feature | Description |
|---|---|
| **Alarms** | |

| Feature | Description |
|---|---|
| Support for new alarm profile based on the Telcordia profile for chassis | The Telcordia alarm profile is designed based on Telcordia standards and incorporates "Service Affecting" information specifically for chassis entities. This feature allows you to monitor and determine the service-affecting status of each alarm associated with a chassis. Once you assign a severity level to an alarm, it becomes fixed and cannot be modified later. You can easily attach the Telcordia profile to any chassis to enable this monitoring and status reporting capability. |
| Support to view a new holdover alarm from show CLI command and SNMP walk with object identifier | A new holdover alarm is triggered when the router enters the holdover state due to loss of all input sources. You can view detailed information about this alarm using the show facility-alarm status CLI command or through SNMP with object identifier (OID) 1.3.6.1.4.1.9.9.761. |
| CPG switch alarm notification | Card Protection Group (CPG) switch assert or clear condition are now notified when using switch commands such as force switch, manual switch, and lockout.<br>**Note**<br>These conditions are supported only when Telcordia profile is used, and you cannot modify the severity of the service affecting alarms. |
| CPG force or manual switch not supported when primary and backup have same priority | In CPG, issuing the switch command with either the force or manual option on the primary is not supported if the backup is already configured with the same command and priority on T1/E1 and T3/E3 interfaces. This configuration is not allowed. |
| Support to disable CPG automatic switchover for LOS alarms | A new CLI command is introduced to disable the CPG automatic switchover triggered by LOS alarm mismatch.<br>**CLI:**<br>disable-alarm-based-switch |

# What's New in Hardware for IOS XE 17.15.3b

There are no new hardware features introduced for this release.

# What's New in Software for IOS XE 17.15.3b

| Feature | Description |
|---|---|
| **IP Addressing** | |

| Feature | Description |
|---|---|
| Optimizing security and CPU utilization using software ACL in VRF traffic management | The Software ACL (SW ACL) is a platform-specific feature designed to control Layer 3 VRF traffic, such as ICMP, SSH, and Telnet, by managing traffic punted to the CPU. This feature enhances security and optimizes CPU utilization by allowing only explicitly permitted traffic to reach the CPU. The software ACLs enhances reliable and secure VRF-based services in enterprise networks and service provider networks.<br>Command introduced:<br>**platform sw_acl enable interface {icmp \| ssh \| telnet}** |
| **MPLS** | |
| Support for Co-routed Inter-area Flex-LSP Tunnels in Point-to-Point OSPF network | Co-routed Flex LSP tunnels now support an inter-area and multiple areas in a Point-to-Point OSPF network. For example, in an inter-area OSPF network, both the head-end or tail-end for a bidirectional LSPs that are in different areas learn the network topology and perform the automatic path redundancy when there is a network link failure. |

# What's New in Hardware for IOS XE 17.15.2

There are no new hardware features introduced for this release.

# What's New in Software for IOS XE 17.15.2

| Feature | Description |
|---|---|
| **Chassis** | |
| Alarms to Monitor Unsupported Slot Compatibility in IM | When an interface module (IM) is inserted into an unsupported slot, an **IM_NOT_SUPPORTED** syslog message is generated. Additionally, new unsupported alarms such as **IM_NOT_SUPPORTED**, **INVALID_COMBINATION**, **INVALID_MODE**, and**SPA_MISMATCH** are asserted when an IM is inserted into a router slot that is not supported.<br>You can view the alarm status and unsupported slot information using the<br>**show facility-alarm status** CLI command.<br>This enhancement ensures administrators are promptly alerted to any compatibility issues, enabling them to take corrective action and maintain network stability. |

| Feature | Description |
|---|---|
| Suppressing Extraneous Alarms for Admin-Down Interfaces | Extraneous alarms along with SNMP traps, can be generated on TDM or Ethernet interfaces even when these interfaces are in an administratively down state. These unnecessary alarms can lead to redundant monitoring and troubleshooting efforts. These alarms are suppressed by default. To mitigate this issue, you can disable this feature or unsuppress these alarms using the following command the router:<br>**platform enable-transceiver-sensor-alarm-on-admin-down**<br>This ensures that only relevant alarms are captured and displayed. This helps streamline network management and improves operational efficiency. |
| **Performance Routing** | |
| Hardware Resource and Scale Monitoring | A new command has been introduced for hardware resource and scale monitoring.<br>You can now view the current utilizations and the maximum capacities available in the hardware for various resources.<br>Command: show platform hardware pp active resource-usage monitor |

# What's New in Hardware for IOS XE 17.15.1b

There are no new hardware features introduced for this release.

# What's New in Software for IOS XE 17.15.1b

| Feature | Description |
|---|---|
| **Alarms** | |
| New APS Alarms and Conditions | New APS alarms and conditions have been introduced to enhance network monitoring and management. These alarms are raised or cleared during APS manual, forced, and lockout switch actions, providing real-time alerts on network changes. This advanced alerting mechanism ensures that network operators are immediately informed of any alterations, enabling them to swiftly respond to and manage network conditions, thereby maintaining optimal performance and reliability. |
| SONET Alarms for APS | In APS scenarios, the existing SONET alarms follow the GR-253 standard for alarm soaking. This standardization helps filter out transient conditions by defining specific assertion and clearing times for alarms. |
| SD-BER and SF -BER Alarms for T1/E1 and T3/E3 services | Signal Failure-Bit Error Rate (SF-BER) and Signal Degrade-BER (SD-BER) alarms are declared when there is a signal failure or signal degradation that happens in the traffic.<br>These alarms may be raised when the error rate of a given entity exceeds the user configured BER threshold value.<br>This helps administrator to take corrective actions. |

| Feature | Description |
|---|---|
| **CEM** | |
| DDS DS0 Remote Latching Loopback | DS0 loopback is used for testing and troubleshooting the T1 or E1, T3 or E3, and OCx channel over PSN. You can configure DS0 loopback on these controllers for remote devices. |
| Protected TAP on FRR Protected Core | You can now monitor CEM traffic through protected TAP and split TAP sessions on the protected Fast Reroute (FRR) core interface. During events such as link failure or connectivity issues, the automatic switching happens from active to standby path.<br>Thus, you can monitor and debug the issue without affecting the traffic on these FRR protected core interfaces. |
| Protection Switching Count for Protected SONET Interface | In SONET networks with redundancy, Automatic Protection Switching (APS) seamlessly transitions traffic between working and standby protection links, typically due to circuit failures or other disruptions.<br>Each switching event is tracked using the Protection Switching Count (PSC) parameter. This parameter allows network operators to monitor and analyze the frequency of these switches in real-time. By examining the PSC count, users can diagnose the network to identify the root causes of frequent switching events and implement necessary corrective actions.<br>This advanced capability significantly enhances network reliability and performance, offering users a robust and efficient solution for maintaining optimal service quality. |
| Clear Counters command | • Unlike the previous release, where the **clear counters** command reset the old dataset, from this release onwards, the command resets all the PMON datasets, including the current dataset.<br>• You can clear the PMON data for a specific interface module on the device using the **clear controller hw-module** command |
| GR-820-CORE specific Performance Monitoring | The **show controller tabular** enables you to view the performance monitoring details in tabular form as per GR-820-Core standards. |
| **Chassis** | |

| Feature | Description |
|---|---|
| Alarms to Monitor Standby RSP Upgrade During IOS Version Mismatch | During an upgrade, for a high availability setup, if the IOS version of the active Route Switch Processor (RSP) does not match the IOS version of the standby RSP, a Syslog message, **IPC: IOS versions do not match** is printed on the console. The upgrade process is aborted and there are no alarms to notify the IOS version mismatch or the progress of the standby upgrade.<br><br>From Cisco IOS XE 17.15.1, show commands have been enhanced to display Syslog messages for any active and standby RSP version mismatch, and the IOS XE image from the active RSP is copied to the standby RSP.<br><br>You can execute the following show commands on the active RSP to monitor the progress of the upgrade:<br><br>• **show facility-alarm status**<br><br>• **show facility-condition status**<br><br>The NCS 4206/16-RSP3 module supports this feature. See the High Availability Configuration Guide for the upgrade process. |
| Alarm for Incompatible SFP | When an incompatible SFP is used in Ethernet interface modules on the RSP3 node, a *Transceiver NOT_COMPATIBLE* alarm is raised. |
| **High Availability** | |
| Monitoring alarms for standby RSP management interface | In addition to Active RSP, alarms are now generated for the management interface of the Stand-by RSP. You can monitor these alarms in Cisco's Evolved Programmable Network Manager (EPNM) and take the appropriate action to fix the problem. |
| In-Service Software Upgrade (ISSU) Enhancements | During the ISSU upgrade, the system verifies if the new software image is already available in the active and standby boot flash before the binary image expansion. This helps to reduce the ISSU upgrade time on multiple devices.<br><br>Syslog messages are generated during this ISSU upgrade for each stage. If alarms are generated, they are captured at each stage and sent to SNMP. You can monitor the ISSU process using the show facility-alarm status CLI command.<br><br>These enhancements are supported only on RSP3 modules. |
| **QoS** | |
| Displaying ASIC QoS Policer Values for Egress Traffic | In addition to Ingress traffic, you can now view the programmed hardware (ASIC) values of the QoS features configured for Egress traffic.<br><br>Use the following command to enable ASIC values:<br><br>**platform qos-egress-hw-param enable**<br><br>The programmed hardware (ASIC) value may differ from the configured software value due to hardware limitations. Now, you can compare the actual QoS policer value programmed in the hardware with the value you configured in the software for egress traffic. |
| **Timing and Synchronization** | |

| Feature | Description |
|---|---|
| Improved Network Synchronization Redundancy with an External BITS Clock | The T4 PLL in the route processor can now send a SyncE signal through the BITS port to an external clocking device. If equipped with a high-quality oscillator, the external clocking device can clean up the timing signal to reduce the jitter. When returned to the T0 PLL through the same BITS port, the cleaned-up signal can be sent to other nodes to propagate network synchronization.<br><br>This functionality is useful when an external BITS clock cannot receive timing inputs from a Primary Reference Source (PRS). The system can fall back on using the SyncE signal received from a peer router to provide redundancy to the network synchronization operation.<br><br>Command introduced:<br><br>**network-clock timing-source** bits<br><br>Compliance: BITS implementation and SyncE recommendations from GR-436 and G.8264 standards<br><br>Supported Interface Module: RSP3 |


# What's New in Hardware for IOS XE 17.15.1

| Hardware | Description |
|---|---|
| Cisco 10GBASE SFP+ modules Optics | This release launches the following new optics on selective hardware within the product portfolio. For details refer to the Transceiver Module Group (TMG) Compatibility Matrix.<br><br>SFP-10G-BXD-I, SFP-10G-BXU-I, SFP-10G-BX40D-I and SFP-10G-BX40U-I support is extended to the following interface module:<br><br>• A900-IMA8CS1Z-M |

# What's New in Software for IOS XE 17.15.1

| Feature | Description |
|---|---|
| **Alarms** | |
| SONET Alarms for APS | • With Automatic Protection Switching (APS), SONET alarms soaking as per the recommendation from GR-253.<br><br>• Alarm is raised or cleared during APS manual, force, and lock out switch actions.<br><br>• When traffic is switched to an alternate link in the APS group, the severity of the alarms is affected based on service impact. |

| Feature | Description |
|---|---|
| SD-BER and SF -BER Alarms for T1/E1 and T3/E3 services | Signal Failure-Bit Error Rate (SF-BER) and Signal Degrade-BER (SD-BER) alarms are declared when there is a signal failure or signal degradation that happens in the traffic.<br>These alarms may be raised when the error rate of a given entity exceeds the user-configured BER threshold value.<br>This helps the administrator to take corrective actions. |
| **CEM** | |
| DDS DS0 Remote Latching Loopback | DS0 loopback is used for testing and troubleshooting the T1 or E1, T3 or E3, and OCx channel over PSN. You can configure DS0 loopback on these controllers for remote devices. |
| Protection Switching Count for Protected SONET Interface | In SONET with redundancy, an Automatic protection switching (APS) occurs between working and standby protection links due to reasons like a circuit failure. Whenever the switching happens, the switching count is tracked using a Protection Switching Count (PSC) parameter.<br>Depending on the PSC count, you can debug the network to identify the reason for extensive switching and work on the corrective actions. |
| **TCAM and NFT Commands** | |
| TCAM and NFT Commands | New commands have been introduced for the Ternary Content-Addressable Memory (TCAM) and NFT.<br>**TCAM**<br>You can now view the Ternary Content-Addressable Memory (TCAM) utilization for each control plane TCAM entry.<br>Command: show platform hardware pp active tcam utilization control-plane-sessions<br>**NFT**<br>• You can now enable the collection of the packets punted to the CPU from the NFT hash table.<br>Command: platform nft-summarization enable<br>• Once the above command is enabled, you can use a timer to clean up the NFT hash table.<br>Command: platform nft-summarization timer-value<br>• You can view a summary of the packets punted to the CPU from the NFT hash table.<br>Command: show platform hardware pp active infrastructure pi nft summary |

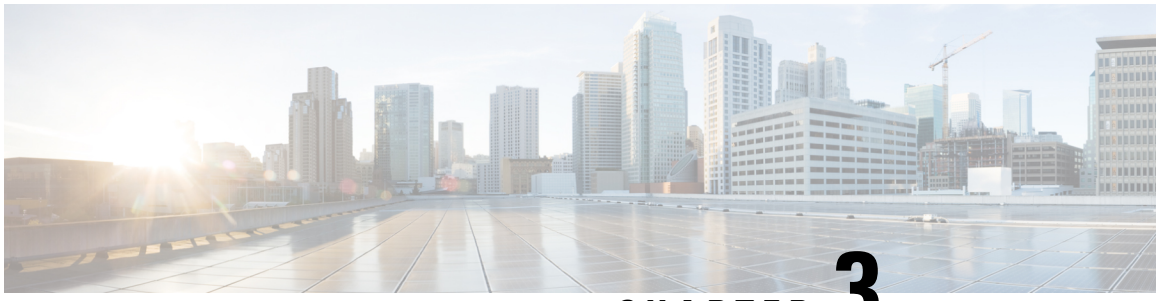

CHAPTER 3

# Caveats

This chapter describes open and resolved severity 1 and 2 caveats and select severity 3 caveats:

- The "Open Caveats" sections list open caveats that apply to the current release and may apply to previous releases. A caveat that is open for a prior release and is still unresolved applies to all future releases until it is resolved.
- The "Resolved Caveats" sections list caveats resolved in a specific release, but open in previous releases.

The bug IDs are sorted alphanumerically.

**Note** The Caveats section includes the bug ID and a short description of the bug. For details on the symptoms, conditions, and workaround for a specific caveat you must use the Bug Search Tool.


- Open Caveats - Cisco IOS XE 17.15.5, on page 35
- Resolved Caveats - Cisco IOS XE 17.15.5, on page 36
- Open Caveats - Cisco IOS XE 17.15.4, on page 36
- Resolved Caveats - Cisco IOS XE 17.15.4, on page 36
- Open Caveats - Cisco IOS XE 17.15.3b, on page 37
- Resolved Caveats - Cisco IOS XE 17.15.3b, on page 37
- Open Caveats - Cisco IOS XE 17.15.2, on page 37
- Resolved Caveats - Cisco IOS XE 17.15.2, on page 38
- **Open Caveats - Cisco IOS XE 17.15.1b**, on page 38
- Resolved Caveats - Cisco IOS XE 17.15.1b, on page 38
- Open Caveats - Cisco IOS XE 17.15.1 , on page 39
- Resolved Caveats - Cisco IOS XE 17.15.1 , on page 39
- Cisco Bug Search Tool, on page 39


# Open Caveats - Cisco IOS XE 17.15.5

There are no open caveats in this release.

# Resolved Caveats - Cisco IOS XE 17.15.5

| Identifier | Headline |
|---|---|
| CSCwj71820 | L2VPN pseudowire configuration is causing the GNMI state to go down. |
| CSCwp67315 | Disable unsupported BER rate at path layer. |
| CSCwq32796 | S1S0 in H1 byte from second STS in concatenated mode is undefined. |
| CSCws31099 | ASR903: BIDI Optics: Observing bandwidth set to 1Gig on 10G interface. |
| CSCwq92333 | Enabling CLI option to configure WAN mode for IMA8Z. |
| CSCwr22203 | In alarm state ES-L and UAS-P, after 24hr, the total count of these alarms in PMON gives an odd value. |
| CSCwp51141 | No SES, UAS with PUNEQ alarm in STS1E port. |
| CSCwr11772 | In the SONET-APS controller level configuration, the **overhead tunnel aps_all** command displays max CEM-pseudowires error. |
| CSCwp46009 | The path and line PMON counter discrepancy for STS1e path. |
| CSCws53320 | After upgrading to 17.12.4 or 17.12.5, no Rx values can be received on interface Te 0/0/26. |

# Open Caveats - Cisco IOS XE 17.15.4

| Identifier | Headline |
|---|---|
| CSCwp67315 | Disable unsupported BER rate at path layer - CISCOCE-345. |
| CSCwp51141 | No SES, UAS with PUNEQ alarm in STS1E port - CISCOCE-356. |
| CSCwp46009 | Path and line PMON counter discrepancy for STS1e path - CISCOCE-357, 355. |

# Resolved Caveats - Cisco IOS XE 17.15.4

| Identifier | Headline |
|---|---|
| CSCwo95611 | [17.9.2_VS06 - SFP-10G-BX40D-I ] Interface speed is set to 1000 after inserting the SFP-10G-BX40D-I. |
| CSCwp16126 | Support for holdover alarm set or clear in the **show facility-alarm status** table. |
| CSCwm67252 | ASR9xx shelf LED glowing without any alarm in the system - CISCOCE-316. |

| Identifier | Headline |
|---|---|
| CSCwo50314 | B3 SD and SF alarms raised concurrently. |
| CSCwp00333 | IPv6 and IPv4 is not working after removing a interface in port-channel in ASR903. |
| CSCwp12666 | ASR 902 router goes down with nested peer-policy templates. |
| CSCwo28447 | Squelch feature is not working when syncE and BITS have same QL-value. |
| CSCwo81175 | A900-RSP3C-400-S: uea_mgr fault on fp_0_0 (rc=139) reported with 17.3.3, 16.9.3 and same not seen on 03.18.02.SP. |
| CSCwo28439 | Incorrect clock selection interface is displaying for the show network-clock sync CLI command. |

# Open Caveats - Cisco IOS XE 17.15.3b

There are no open caveats in this release.

# Resolved Caveats - Cisco IOS XE 17.15.3b

| Identifier | Headline |
|---|---|
| CSCwm82342 | Post reload HSRP is stuck in Init state and shows interface down |
| CSCwm04031 | ASR-907/17.9.2a/Both active and standby RSP's OAM/CFM configs automatically changed after a reload. |
| CSCwn12822 | Discrepancy with counters on SONET controller during BERT test. |
| CSCwn94246 | XCVR incompatible alarm missing without Sonet controller configurations. |
| CSCwn41240 | Observed nnframed T1 as none and not shown in running-config under T3 controller. |
| CSCwn38105 | SSH process goes down with a segmentation fault. |
| CSCwo10841 | XCVR incompatible alarm not asserted in Bay0 sonet controller cards |

# Open Caveats - Cisco IOS XE 17.15.2

| Identifier | Headline |
|---|---|
| CSCwk02087 | ASR903-17.6.3-BFD stuck in INIT state for interface Te0/0/0 & Te0/4/3. |
| CSCwm04031 | ASR-907-17.9.2a-Both active and standby RSP's OAM or CFM configurations automatically changed after a reload. |

# Resolved Caveats - Cisco IOS XE 17.15.2

| Identifier | Headline |
|---|---|
| CSCwj72178 | ASR903 (RSP3) - OSPF not coming on G8032 VLAN after a reload. |
| CSCwk78043 | Double description under CPG STS1E mode. |
| CSCwk87121 | Ports on A900-IMA8S remain down after ISSU operation with RSP3. |
| CSCwm91197 | Silent reload of 3GMS IM due to PCI transaction failure. |
| CSCwm86214 | LDP session flap causes memory leak for EMPLS3LD which leads to RSP crash. |

# Open Caveats - Cisco IOS XE 17.15.1b

The list of open caveats for the RSP3 module.

| Identifier | Headline |
|---|---|
| CSCwk02087 | ASR903: 17.6.3-BFD stuck in INIT state for interface Te0/0/0 & Te0/4/3 |
| CSCwj60760 | Confd process not in Started State in 5 mins after netconf-yang config is done |
| CSCwk27810 | After reconfiguring second synce source the QL-failed for that source interface and ranking also 254 |

# Resolved Caveats - Cisco IOS XE 17.15.1b

The list of resolved caveats for the RSP3 module.

| Identifier | Headline |
|---|---|
| CSCwi33111 | Eomer T1: Sev changes back from major to minor after IM OIR. |
| CSCwj06370 | Serial cease traffic when configuring module other port |
| CSCwj05647 | 3GMS Serial interface protocol down with specific Modem |
| CSCwj12451 | Update 2^20-O151 QRSS bert help string with QRSS Keyword in ASR9xx platform |
| CSCwj44502 | DCR clocking fails to get acquired on the with sts1-E mode |
| CSCwj99522 | Need to support dtr not-used CLI in RS232 transparent mode |
| CSCwi92203 | Channelized DS3: RAI is propagating to all DS1's when DS3 RAI is asserted |
| CSCwk58917 | L-bit propogation not enabled for LOF alarm after framing change with framed SAToP |

# Open Caveats - Cisco IOS XE 17.15.1

The list of open caveats for the RSP2 module.

| Identifier | Headline |
|---|---|
| CSCwh75614 | Increased CPU after upgrading router to 17.6.3 from 16.9.4 when 1000 SLM/DMM sessions are configured |
| CSCwj38216 | BDI ARP is not learning but peer side BDI MAC is learning through VC |


# Resolved Caveats - Cisco IOS XE 17.15.1

The list of resolved caveats for the RSP2 module.

| Identifier | Headline |
|---|---|
| CSCwi76112 | Message to be displayed for M13 framing when configured with clear-channel |
| CSCwi60730 | Speed LED status is not correct when sonet/sdh mode is configured |

# Cisco Bug Search Tool

Cisco Bug Search Tool (BST), the online successor to Bug Toolkit, is designed to improve effectiveness in network risk management and device troubleshooting. You can search for bugs based on product, release, and keyword, and aggregates key data such as bug details, product, and version. For more details on the tool, see the help page located at http://www.cisco.com/web/applicat/cbsshelp/help.html

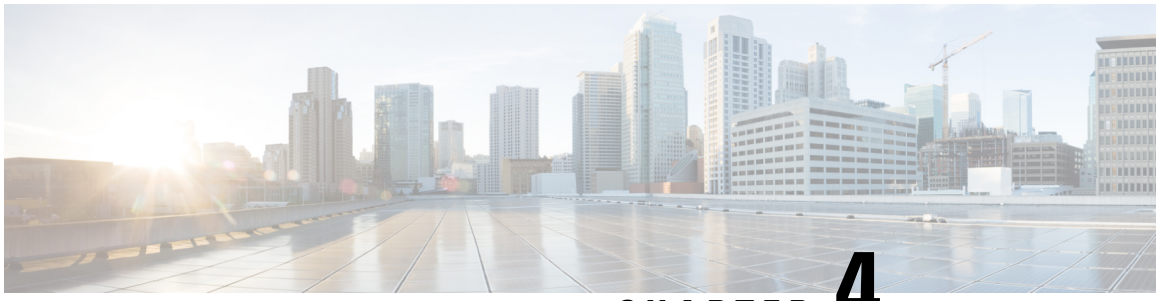

CHAPTER 4

# Restrictions and Limitations

**Note** The error message "PLATFORM-1-NOSPACE: SD bootflash : no space alarm assert" may occur in the following scenarios:

- Any sector of SD Card gets corrupted
- Improper shut down of router
- power outage.

This issue is observed on platforms which use EXT2 file systems.

We recommend performing a reload of the router. As a result, above alarm will not be seen during the next reload due to FSCK(file systems check) execution.

However, If the error persists after a router reload, we recommend to format the bootflash or FSCK manually from IOS.

- Embedded Packet Capture (EPC) is not supported on ASR 900 routers.
- From the Cisco IOS XE 16.6.1 releases, In-Service Software Upgrade (ISSU) is not supported on the router to the latest releases. For more information on the compatible release versions, see ISSU Support Matrix.
- ISSU is not supported between a Cisco IOS XE 3S release and the Cisco IOS XE Bengaluru 17.6.x release.
- The port restriction on 1-port OC-192 or 8-port low rate CEM interface module is on port pair groups. If you have OC48 configured on a port, the possible port pair groups are 0–1, 2–3, 4–5, 6–7. If one of the ports within this port group is configured with OC48 rate, the other port cannot be used.
- RS422 pinout works only on ports 0–7.
- The **ip cef accounting** command is *not* supported on the router.
- Configuration sync does *not* happen on the Standby RSP when the active RSP has Cisco Software Licensing configured, and the standby RSP has Smart Licensing configured on the router. If the active RSP has Smart Licensing configured, the state of the standby RSP is undetermined. The state could be pending or authorized as the sync between the RSP modules is not performed.

- Evaluation mode feature licenses may not be available to use after disabling, and enabling the smart licensing on the RSP2 module. A reload of the router is required.
- Ingress counters are not incremented for packets of the below format on the RSP3 module for the 10-Gigabit Ethernet interfaces, 100-Gigabit Ethernet interfaces, and 40-Gigabit Ethernet interfaces:

  **Packet Format**

  MAC header---->VLAN header---->Length/Type

  When these packets are received on the RSP3 module, the packets are not dropped, but the counters are not incremented.
- T1 SAToP, T3 SAToP, and CT3 are supported on an UPSR ring only with local connect mode. Cross-connect configuration of T1, T3, and CT3 circuits to UPSR are not supported.
- PTP is not supported when 8-port 10-Gigabit Ethernet interface module is in oversubscribed mode.
- Port channel 61–64 is not supported in the 16.11.1a release. The range of configurable port channel interfaces has been limited to 60.
- Effective with Cisco IOS XE Everest 16.6.1, the VPLS over Port-channel (PoCH) scale is reduced from 48 to 24 for Cisco ASR 903 RSP3 module.



**Note** The PoCH scale for Cisco ASR 907 routers is 48.

- The frame drops may occur for packets with packet size of less than 100 bytes, when there is a line rate of traffic over all 1G or 10G interfaces available in the system. This restriction is applicable only on RSP2 module, and is not applicable for RSP3 module.
- One Ternary Content-Addressable Memory (TCAM) entry is utilized for Segment Routing Performance Measurement. This is required for the hardware timestamping to function.
- While performing an auto upgrade of ROMMON, only primary partition is upgraded. Use the **upgrade rom-mon filename** command to upgrade the secondary partition of the ROMMON during the auto upgrade. However, the router can be reloaded during the next planned reload to complete the secondary ROMMON upgrade. This is applicable to ASR 903 and ASR 907 routers.
- In the Cisco IOS XE 17.1.1 release, the EVPN EVI type is VLAN-based by default, and while configuring for the EVPN EVI type, it is recommended to configure the EVPN EVI type as VLAN-based, VLAN bundle and VLAN aware model.
- For Cisco IOS XE Gibraltar Release 16.9.5, Cisco IOS XE Gibraltar Release 16.12.3, and Cisco IOS XE Amsterdam 17.1.x, a minimum disk space of 2 MB is required in the boot flash memory file system for a successful ROMMON auto upgrade process. For a disk space lesser than 2 MB, ROMMON auto upgrade fails and the router reboots. This is applicable to Cisco ASR 903 and Cisco ASR 907 routers.
- In the Cisco IOS XE 16.12.1, 17.1.1, and 17.2.1 releases, IPsec is not supported on the Cisco RSP3 module.
- CEM circuit provisioning issues may occur during downgrade from Cisco IOS XE Amsterdam 17.3.1 to any lower versions or during upgrade to Cisco IOS XE Amsterdam 17.3.1 from any lower versions, if the CEM scale values are greater than 10500 APS/UPSR in protected CEM circuits. So, ensure that the CEM scale values are not greater than 10500, during ISSU to or from 17.3.1.

- Some router models are not fully compliant with all IETF guidelines as exemplified by running the pyang tool with the **lint** flag. The errors and warnings that are exhibited by running the pyang tool with the **lint** flag are currently noncritical as they do not impact the semantic of the models or prevent the models from being used as part of the toolchains. A script has been provided, "check-models.sh", that runs pyang with **lint** validation enabled, but ignoring certain errors. This allows the developer to determine what issues may be present.

  As part of model validation for the Cisco IOS XE Amsterdam 17.3.1 release, "LEAFREF_IDENTIFIER_NOT_FOUND" and "STRICT_XPATH_FUNCTIONS" error types are ignored.

- Test Access Port (TAP) is not supported when the iMSG VLAN handoff feature is enabled on the same node.

- Data Communication Channel (DCC) is not supported in the A900-IMA1Z8S-CXMS interface module for the Cisco IOS XE Cupertino 17.8.1 release.

- In Cisco IOS XE Dublin 17.12.1, for mLDP Partitioned multicast distribution tree (MDT) to work with PIM-Sparse Mode (SM) traffic, configure only a single ingress PE and ensure that the **strict-rpf interface** command is disabled. Configuring multiple PE ingress is not allowed.

- SF and SD alarms are not supported on T1 and T3 ports for the following interface modules:
  - A900-IMA3G-IMSG
  - A900-IMA48D-C
  - A900-IMA48T-C

- In RSP2 and RSP3 modules, during In-Service Software Upgrade (ISSU), interface modules undergo FPGA upgrade.

  The following table details the IM Cisco IOS XE versions during ISSU with respect to FPGA upgrade and the impact of traffic flow for these IMs:

***Table 16: Impact on IM during ISSU and FPGA Upgrade***

| IM | IM Version During ISSU | Pre-ISSU FPGA Upgrade | Post-ISSU Impact on IM | FPGA Version post ISSU |
|---|---|---|---|---|
| Phase 1 | Cisco IOS XE 17.3.x or earlier version to Cisco IOS XE 17.4.x | FPGA upgrade completes and IM starts after the reload process.<br>FPGA version (phase -1) - 0.47 | Traffic is impacted during upgrade. | 0.75 |

| IM | IM Version During ISSU | Pre-ISSU FPGA Upgrade | Post-ISSU Impact on IM | FPGA Version post ISSU |
|---|---|---|---|---|
| Phases 1 and 2 | Version earlier to Cisco IOS XE 17.8.x | FPGA upgrade completes and IM starts after the reload process.<br>• FPGA version (Phase 1)— 0.47<br>• FPGA version (Phase 2)<br>• A900-IMA8Z—0922<br>• Combo IM: 69.24 | Traffic is impacted during upgrade. | • FPGA version (Phase 1)—0.75<br>• FPGA version (Phase 2)<br>• A900-IMA8Z—0924<br>• Combo IM: 69.32 |
| Phase 1 | Cisco IOS XE 17.4.1 or later versions to Cisco IOS XE 17.8.1 | IM FPGA already upgraded with the latest version and reload is not required. | Traffic is not impacted. | 0.75 |

For more information on the FPGA versions, see Supported FPGA, HoFPGA, and ROMMON Versions.

Refer the following table for supported IMs:

***Table 17: ASR 900 Supported Ethernet Interface Module***

| Phase 1 IM | Phase 2 IM | Phase 3 IM |
|---|---|---|
| A900-IMA8S | A900-IMA8S1Z | A900-IMA8Z |
| A900 -IMA8T | A900-IMA8T1Z | A900-IMA2F |
| A900-IMA1X | A900-IMA2Z | A900-IMA2C |