

FlexConfig policies

These topics describe how to configure and deploy FlexConfig policies.

- FlexConfig policy overview, on page 1
- Requirements and prerequisites for FlexConfig policies, on page 22
- Guidelines and limitations for FlexConfig, on page 23
- Customize device configuration with FlexConfig policies, on page 23
- Examples for FlexConfig, on page 38
- Migrate FlexConfig policies, on page 44
- History for FlexConfig, on page 46

FlexConfig policy overview

A FlexConfig policy is a container of an ordered list of FlexConfig objects that

- includes a series of Apache Velocity scripting language commands, ASA software configuration commands, and variables that you define
- contains FlexConfig objects that are essentially programs that generate a sequence of ASA commands that will then be deployed to the assigned devices, and
- configures the related feature on the Firewall Threat Defense device.

FlexConfig policy usage and limitations

Firewall Threat Defense uses ASA configuration commands to implement some features, but not all features. There is no unique set of Firewall Threat Defense configuration commands. Instead, the point of FlexConfig is to allow you to configure features that are not yet directly supported through Firewall Management Center policies and settings.

Caution We recommend using FlexConfig policies only if you are an advanced user with a strong ASA background and at your own risk. You may configure any commands that are not prohibited. Enabling features through FlexConfig policies may cause unintended results with other configured features.

Contact the Cisco Technical Assistance Center for support concerning FlexConfig policies that you have configured. The Cisco Technical Assistance Center does not design or write custom configurations on any customer's behalf. Cisco expresses no guarantees for correct operation or interoperability with other features. FlexConfig features may become deprecated at any time. For fully guaranteed feature support, you must wait for the Firewall Management Center support. When in doubt, do not use FlexConfig policies.

Recommended usage for FlexConfig policies

Use FlexConfig policies in two main scenarios to ensure proper firewall configuration and functionality.

- You are converting from ASA to Firewall Threat Defense, and there are compatible features you are using (and need to continue using) that Firewall Management Center does not directly support. In this case, use the **show running-config** command on the ASA to see the configuration for the feature and create your FlexConfig objects to implement it. Experiment with the object's deployment settings (once/every time and append/prepend) to get the right setting. Verify by comparing **show running-config** output on the two devices.
- You are using Firewall Threat Defense but there is a setting or feature that you need to configure, e.g. the Cisco Technical Assistance Center tells you that a particular setting should resolve a specific problem you are encountering. For complicated features, use a lab device to test the FlexConfig and verify that you are getting the expected behavior.

The system includes a set of predefined FlexConfig objects that represent tested configurations. If the feature you need is not represented by these objects, first determine if you can configure an equivalent feature in standard policies. For example, the access control policy includes intrusion detection and prevention, HTTP and other types of protocol inspection, URL filtering, application filtering, and access control. The ASA implements these functions using separate features. Many features are not configured using CLI commands, so not every policy appears in the output of the **show running-config** command.

Note At all times, keep in mind that there is not a one-to-one overlap between ASA and Firewall Threat Defense. Do not attempt to completely recreate an ASA configuration on a Firewall Threat Defense device. You must carefully test any feature that you configure using FlexConfig.

CLI commands in FlexConfig objects

A managed device uses ASA configuration commands to configure some features. Although not all ASA features are compatible with the device, some features can work on the managed device but you cannot configure them through Firewall Management Center policies. You can use FlexConfig objects to specify the CLI required to configure these features.

ASA documentation resources

When using FlexConfig to manually configure a feature, you are responsible for knowing and implementing the commands according to the proper syntax. FlexConfig policies do not validate CLI command syntax. For more information about proper syntax and configuring CLI commands, use the ASA documentation as a reference:

- ASA CLI configuration guides explain how to configure a feature. Find the guides at https://www.cisco.com/c/en/us/support/security/adaptive-security-appliance-asa-software/products-installation-and-configuration-guides-list.html
- ASA command references provide additional information sorted by command name. Find the references at https://www.cisco.com/c/en/us/support/security/adaptive-security-appliance-asa-software/products-command-reference-list.html

Determine the ASA software version and current CLI configuration

Determine the ASA software version and examine the current CLI-based configuration to identify which ASA CLI configuration guides to use for instructions on configuring a feature.

Because the system uses ASA software commands to configure some features, you need to determine the current ASA version used in software running on the Firewall Threat Defense device. This version number indicates which ASA CLI configuration guides to use for instructions on configuring a feature. You also should examine the current CLI-based configuration and compare it to the ASA configuration you want to implement.

Keep in mind that any ASA configuration will be very different from a Firewall Threat Defense configuration. Many Firewall Threat Defense policies are configured outside of the CLI, so you cannot see the configuration by looking at the commands. Do not try to create a one-to-one correspondence between an ASA and Firewall Threat Defense configuration.

To view this information, make an SSH connection to the device's management interface and issue the following commands:

- **show version system** and look for the Cisco Adaptive Security Appliance Software Version number. (If you issue the command through the Secure Firewall Management Center CLI tool, omit the **system** keyword.)
- **show running-config** to view the current CLI configuration.
- **show running-config all** to include all the default commands in the current CLI configuration.

You can also issue these commands from within Firewall Management Center using this procedure.

Procedure

Step 1 Choose **System** (⚙) > **Health** > **Monitor**.

Step 2 Click the name of the device targeted by the FlexConfig policy.

You might need to click the open/close arrow in the **Count** column in the Status table to see any devices.

Step 3 Click **View System and Troubleshoot Details**.

Step 4 Click **Advanced Troubleshooting**.

Step 5 Click **Threat Defense CLI**.

Step 6 Choose the **Device**, then choose **show** as the command, and type **version** or one of the other commands as the parameter.

Step 7 Click **Execute**.

For version, search the output for the Cisco Adaptive Security Appliance Software Version number.

You can select the output and press Ctrl+C, then paste it into a text file for later analysis.

Prohibited CLI commands

The purpose of FlexConfig is to configure features that are available on ASA devices that you cannot configure on Firewall Threat Defense devices using Firewall Management Center.

Thus, you are prevented from configuring ASA features that have equivalents in Firewall Management Center. The following table lists some of these prohibited command areas.

In addition, some **clear** commands are prohibited because they overlap with managed policies, and can delete part of the configuration for a managed policy.

The FlexConfig object editor prevents you from including prohibited commands in the object.

Prohibited CLI Command	Description
AAA	Configuration blocked.
AAA-Server	Configuration blocked.
Access-list	Advanced ACL, Extended ACL, and Standard ACL are blocked. Ethertype ACL is allowed. You can use standard and extended ACL objects defined in the object manager inside the template as variables.
ARP Inspection	Configuration blocked.
As-path Object	Configuration blocked.
Banner	Configuration blocked.
BGP	Configuration blocked.
Clock	Configuration blocked.
Community-list Object	Configuration blocked.
Copy	Configuration blocked.
Delete	Configuration blocked.
DHCP	Configuration blocked.
Enable Password	Configuration blocked.
Erase	Configuration blocked.

Prohibited CLI Command	Description
Fragment Setting	Blocked, except for **fragment reassembly**.
Fsck	Configuration blocked.
HTTP	Configuration blocked.
ICMP	Configuration blocked.
Interface	Only **nameif**, **mode**, **shutdown**, **ip address** and **mac-address** commands are blocked.
Multicast Routing	Configuration blocked.
NAT	Configuration blocked.
Network Object/Object-group	Network object creation in the FlexConfig object is blocked, but you can use network objects and groups defined in the object manager inside the template as variables.
NTP	Configuration blocked.
OSPF/OSPFv3	Configuration blocked.
pager	Configuration blocked.
Password Encryption	Configuration blocked.
Policy-list Object	Configuration blocked.
Prefix-list Object	Configuration blocked.
Reload	You cannot schedule reloads. The system does not use the **reload** command to restart the system, it uses the **reboot** command.
RIP	Configuration blocked.
Route-Map Object	Route-map object creation in the FlexConfig object is blocked, but you can use route map objects defined in the object manager inside the template as variables.
Service Object/Object-group	Service object creation in the FlexConfig object is blocked, but you can use port objects defined in the object manager inside the template as variables.
SNMP	Configuration blocked.
SSH	Configuration blocked.
Static Route	Configuration blocked.
Syslog	Configuration blocked.
Time Synchronization	Configuration blocked.

Prohibited CLI Command	Description
Timeout	Configuration blocked.
VPN	Configuration blocked.

Template scripts

You can use scripting language to control processing within a FlexConfig object. Scripting language instructions are a subset of commands supported in the Apache Velocity 1.3.1 template engine. The Apache Velocity engine is a Java-based scripting language that supports looping, if/else statements, and variables.

To learn how to use the scripting language, see the *Velocity Developer Guide* at http://velocity.apache.org/engine/devel/developer-guide.html.

FlexConfig variables

You can use variables in a FlexConfig object in cases where part of a command or processing instruction depends on runtime information rather than static information. During deployment, the variables are replaced with strings obtained from other device configurations, depending on the type of variable.

FlexConfig variable types

Variables are replaced with strings based on the type of variable.

- Policy object variables are replaced with strings obtained from objects defined in Firewall Management Center.
- System variables are replaced with information obtained from the device itself or from policies configured for it.
- Processing variables are loaded with the contents of policy object or system variables as during script execution. For example, in a loop, you iteratively load one value from a policy object or system variable into a processing variable, then use the processing variable to form a command string or perform another action. These processing variables do not show up in the Variables list within a FlexConfig object. Also, you do not add them using the **Insert** menu in the FlexConfig object editor.
- Secret key variables are replaced with the single string defined for the variable within the FlexConfig object.

Variables start with the $ character, except for secret keys, which start with the @ character. For example, $ifname is a policy object variable in this command, whereas @keyname is a secret key.

```
interface $ifname
key @keyname
```

Note The first time you insert a policy object or system variable, you must do so through the **Insert** menu in the FlexConfig object editor. This action adds the variable to the **Variables** list at the bottom of the FlexConfig object editor. You must type in the variable string on subsequent uses, even when using system variables. If you are adding a processing variable, which does not have an object or system variable assignment, do not use the **Insert** menu. If you are adding a secret key, always use the **Insert** menu. Secret key variables do not show up in the Variables list.

Whether a variable is resolved as a single string, a list of strings, or a table of values depends on the type of policy object or system variable you assign to the variable. (Secret keys always resolve to a single string.) You must understand what will be returned in order to process the variables correctly.

Variable processing

At runtime, a variable can resolve to any of these: a single string; a list of strings of the same type; a list of strings of different types; or a table of named values. Variables that resolve to multiple values can have a determinate or indeterminate length. To process the values correctly, you must understand what will be returned.

The main possibilities include these scenarios.

Single value variables

If a variable always resolves to a single string, use the variable directly without modification in the FlexConfig script.

For example, the predefined text variable tcpMssBytes always resolves to a single value (which must be numeric). The **Sysopt_basic** FlexConfig then uses an if/then/else structure to set the maximum segment size based on the value of another single-value text variable, *tcpMssMinimum*.

Implementation methods

The implementation of single value variables depends on the variable type:

- **Standard text variables**: Use the variable directly in the FlexConfig script. For example, the predefined text variable tcpMssBytes always resolves to a single numeric value.
- **Secret key variables**: Always use the **Insert** menu to add the variable, even for second and subsequent uses. These variables do not show up in the Variables list within the FlexConfig object.
- **Policy object variables for network objects**: Equate to a single IP address specification (host address, network address, or address range). You must know what type of address to expect because ASA commands require specific address types.

Note Policy object variables for network objects also equate to a single IP address specification, either a host address, network address, or address range. However, in this case, you must know what type of address to expect, because the ASA commands require specific address types. For example, if a command requires a host address, using a network object variable that points to an object that contains a network address will result in an error during deployment.

TCP MSS configuration using single value variables

The **Sysopt_basic** FlexConfig uses an if/then/else structure to set the maximum segment size based on the value of another single-value text variable, tcpMssMinimum:

```
#if($tcpMssMinimum == "true")
  sysopt connection tcpmss minimum $tcpMssBytes
#else
  sysopt connection tcpmss $tcpMssBytes
#end
```

In this example, you would use the **Insert** menu in the FlexConfig object editor to add the first use of $tcpMssBytes, but you would type in the variable directly on the #else line.

Multiple value variables with same type values

Several policy object and system variables resolve to multiple values of the same type. For example, an object variable that points to a network object group resolves to a list of the IP addresses within the group. Similarly, the system variable $SYS_FW_INTERFACE_NAME_LIST resolves to a list of interface names.

You can also create text objects for multiple values of the same type. For example, the predefined text object enableInspectProtocolList can contain more than one protocol name.

Processing characteristics

Multiple value variables that resolve to a list of items of the same type are frequently of indeterminate length. For example, you cannot know beforehand how many interfaces on a device are named, as users can configure or unconfigure interfaces at any time.

You would typically use a loop to process multiple value variables of the same type. For example, the predefined FlexConfig **Default_Inspection_Protocol_Enable** uses a #foreach loop to go through the enableInspectProtocolList object and process each value.

```
policy-map global_policy
    class inspection_default
    #foreach ( $protocol in $enableInspectProtocolList)
    inspect $protocol
    #end
```

In this example, the script assigns each value in turn to the $protocol variable, which is then used in an ASA **inspect** command to enable the inspection engine for that protocol. In this case, you simply type in $protocol as a variable NAME. You do not use the **Insert** menu to add it, because you are not assigning an object or system value to the variable. However, you must use the **Insert** menu to add $enableInspectProtocolList.

The system loops through the code between #foreach and #end until there are no values remaining in $enableInspectProtocolList.

Multiple value variables with different types

You can create multiple value text objects and have each value serve a different purpose. For example, the predefined **netflow_Destination** text object should include three values in this order: interface name, destination IP address, and UDP port number.

Objects defined in this way should have a determinate number of values to make them easier to process.

Processing multiple value variables

Use the get method to process these objects. Type **.get(*n*)** at the end of the object name, replacing *n* with an index into the object. Start counting at 0, even though the text object lists its values starting at 1.

NetFlow destination configuration example

The predefined **netflow_Destination** text object should have 3 values, in order, interface name, destination IP address, and UDP port number.

The Netflow_Add_Destination object uses this line to add the 3 values from netflow_Destination to the ASA **flow-export** command:

```
flow-export destination $netflow_Destination.get(0) $netflow_Destination.get(1)
$netflow_Destination.get(2)
```

In this example, you would use the **Insert** menu in the FlexConfig object editor to add the first use of $netflow_Destination, and then add **.get(0)**. But you would type in the variable directly for the **$netflow_Destination.get(1)** and **$netflow_Destination.get(2)** specifications.

Multiple value variables that resolve to a table of values

Some system variables return a table of values. These variables include the string MAP in their names. For example, $SYS_FTD_ROUTED_INTF_MAP_LIST is one such variable. The routed interface map returns data in a table of values. Line breaks have been added for clarity.

Variable structure and processing

These variables return data that includes a table of named values for each item. For example, the ROUTED interface MAP returns data that looks like this (line returns added for clarity):

```
[{intf_hardwarare_id=GigabitEthernet0/0, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=255.255.255.0,
intf_ip_addr_v4=10.100.10.1, intf_ipv6_link_local_address=,
intf_logical_name=outside},

{intf_hardwarare_id=GigabitEthernet0/1, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=255.255.255.0,
intf_ip_addr_v4=10.100.11.1, intf_ipv6_link_local_address=,
intf_logical_name=inside},

{intf_hardwarare_id=GigabitEthernet0/2, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=, intf_ip_addr_v4=,
intf_ipv6_link_local_address=, intf_logical_name=},

{intf_hardwarare_id=Management0/0, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=, intf_ip_addr_v4=,
intf_ipv6_link_local_address=, intf_logical_name=management}]
```

In the above example, information is returned for 4 interfaces. Each interface includes a table of named values. For example, intf_hardwarare_id is the name of the interface hardware name property, and returns strings such as GigabitEthernet0/0.

This type of variable is typically of indeterminate length, so you need to use looping to process the values. You also need to add the property name to the variable name to indicate which value to retrieve.

IS-IS interface configuration

For example, IS-IS configuration requires that you add the ASA **ISIS** command to an interface that has a logical name in interface configuration mode. However, you enter that mode using the interface's hardware name. Thus, you need to identify which interfaces have logical names, then configure just those interfaces using their hardware names. The ISIS_Interface_Configuration predefined FlexConfig does this using an if/then structure nested in a loop. In this code, you can see that the #foreach scripting command loads each interface MAP into the $INTF variable, then the #if statement keys off the intf_logical_name value in the MAP ($INTF.intf_logical_name), and if the value is in the LIST defined in the isisIntfList predefined text variable, enters the interface command using the intf_hardwarare_id value ($INTF.intf_hardwarare_id). You would need to edit the isisIntfList variable to add the names of the interfaces on which to configure IS-IS.

```
#foreach ($intf in $SYS_FTD_ROUTED_INTF_MAP_LIST)
 #if ($isIsIntfList.contains($intf.intf_logical_name))
  interface $intf.intf_hardwarare_id
   isis
   #if ($isIsAddressFamily.contains("ipv6"))
   ipv6 router isis
   #end
 #end
#end
```

Evaluate device variable results

To evaluate what a variable will return by creating a simple FlexConfig object that processes variables and shows their resolved values in a configuration preview.

This method allows you to test and analyze variable resolution without deploying potentially invalid configuration commands to devices.

Procedure

Step 1 Create a simple FlexConfig object that processes an annotated list of variables.

Example:

```
Following is a network object group variable for the
IPv4-Private-All-RFC1918 object:

$IPv4_Private_addresses

Following is the system variable SYS_FW_MANAGEMENT_IP:

$SYS_FW_MANAGEMENT_IP

Following is the system variable SYS_FW_ENABLED_INSPECT_PROTOCOL_LIST:

$SYS_FW_ENABLED_INSPECT_PROTOCOL_LIST

Following is the system variable SYS_FTD_ROUTED_INTF_MAP_LIST:

$SYS_FTD_ROUTED_INTF_MAP_LIST
```

```
Following is the system variable SYS_FW_INTERFACE_NAME_LIST:

$SYS_FW_INTERFACE_NAME_LIST
```

Step 2 Assign the FlexConfig object to a FlexConfig policy.

Step 3 Assign the policy to a device.

Step 4 Save the policy.

Step 5 Preview the configuration for that device.

The preview shows the resolved values.

Step 6 Select the preview text, copy it, then paste the output into a text file for analysis.

Example:

```
###Flex-config Prepended CLI ###

###CLI generated from managed features ###

###Flex-config Appended CLI ###
Following is an network object group variable for the
IPv4-Private-All-RFC1918 object:

[10.0.0.0, 172.16.0.0, 192.168.0.0]

Following is the system variable SYS_FW_MANAGEMENT_IP:

192.168.0.171

Following is the system variable SYS_FW_ENABLED_INSPECT_PROTOCOL_LIST:

[dns, ftp, h323 h225, h323 ras, rsh, rtsp, sqlnet, skinny, sunrpc,
xdmcp, sip, netbios, tftp, icmp, icmp error, ip-options]

Following is the system variable SYS_FTD_ROUTED_INTF_MAP_LIST:

[{intf_hardwarare_id=GigabitEthernet0/0, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=255.255.255.0,
intf_ip_addr_v4=10.100.10.1, intf_ipv6_link_local_address=,
intf_logical_name=outside},

{intf_hardwarare_id=GigabitEthernet0/1, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=255.255.255.0,
intf_ip_addr_v4=10.100.11.1, intf_ipv6_link_local_address=,
intf_logical_name=inside},

{intf_hardwarare_id=GigabitEthernet0/2, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=, intf_ip_addr_v4=,
intf_ipv6_link_local_address=, intf_logical_name=},

{intf_hardwarare_id=Management0/0, intf_ipv6_eui64_addresses=[],
intf_ipv6_prefix_addresses=[], intf_subnet_mask_v4=, intf_ip_addr_v4=,
intf_ipv6_link_local_address=, intf_logical_name=management}]

Following is the system variable SYS_FW_INTERFACE_NAME_LIST:

[outside, inside, management]
```

Note

Do not deploy this FlexConfig to the device, however, because it will not contain any valid configuration commands. You would get deployment errors. After obtaining the preview, delete the FlexConfig object from the FlexConfig policy and save the policy.

You can analyze the resolved variable values in the text file to understand what each variable returns for the device.

FlexConfig policy object variables

A policy object variable is associated with a specific policy object configured in the Object Manager. When you insert a policy object variable in a FlexConfig object, you give the variable a name and select the object associated with it.

Policy object variable types

Although you can give the variable the exact same name as the associated object, the variable itself is not the same thing as the associated object. You must use the **Insert** > **Insert Policy Object** > ***Object Type*** menu in the FlexConfig object editor to add the variable for the first time to the script in the FlexConfig to establish the association with the object. Simply typing in the name of the object preceded by a $ sign does not create a policy object variable.

You can create variables to point to these types of objects. Ensure that you create the right type of object for each variable. To create objects, go to the **Objects** > **Object Management** page.

- **Text Objects**—For text strings, which can include IP addresses, numbers, and other free-form text such as interface or zone names. Select **FlexConfig** > **Text Object** from the table of contents, then click **Add Text Object**. You can configure these objects to contain a single value or multiple values. These objects are highly flexible and built specifically for use within FlexConfig objects. For detailed information, see Configure FlexConfig text objects, on page 29.
- **Network**—For IP addresses. You can use network objects or groups. Select **Network** from the table of contents, then select **Add Network** > **Add Object** or **Add Group**. If you use a group object, the variable returns a list of each IP address specification within the group. Addresses can be host, network, or address ranges, depending on the object contents. See Networks.
- **Security Zones**—For interfaces within a security zone or interface group. Select **Interface** from the table of contents, then select **Add** > **Security Zone** or **Interface Group**. A security zone variable returns a list of the interfaces within that zone or group for the device being configured. See Interfaces.
- **Standard ACL Object**—For standard access control lists. A standard ACL variable returns the name of the standard ACL object. Select **Access List** > **Standard** from the table of contents, then click **Add Standard Access List Object**. See Access lists.
- **Extended ACL Object**—For extended access control lists. An extended ACL variable returns the name of the extended ACL object. Select **Access List** > **Extended** from the table of contents, then click **Add Extended Access List Object**. See Access lists.
- **Route Map**—For route map objects. A route map variable returns the name of the route map object. Select **Route Map** from the table of contents, then click **Add Route Map**. See Configure a route map.

FlexConfig system variables

System variables are replaced with information obtained from the device itself or from policies configured for it. To add a variable for the first time in the FlexConfig script and establish its association with the system variable, use the **Insert** > **Insert System Variable** > ***Variable NAME*** menu in the FlexConfig object editor. Typing the system variable name with a preceding $ sign does not create a system variable in the context of the FlexConfig object.

Before using a variable, check the typical value it returns. Refer to Evaluate device variable results, on page 10.

Table 1: System variables

NAME	Description
SYS_FW_OS_MODE	The operating system MODE of the device. Possible values are ROUTED or TRANSPARENT.
SYS_FW_OS_MULTIPLICITY	Whether the device is running in SINGLE or multiple context MODE. Possible values are SINGLE, MULTI, or NOT_APPLICABLE.
SYS_FW_MANAGEMENT_IP	The MANAGEMENT IP address of the device
SYS_FW_HOST_NAME	The device hostname
SYS_FTD_INTF_POLICY_MAP	A MAP with INTERFACE NAME as key and POLICY-MAP as value. This variable returns nothing if there are no INTERFACE-based service policies defined on the device.
SYS_FW_ENABLED_INSPECT_PROTOCOL_LIST	The LIST of protocols for which inspection is ENABLED.
SYS_FTD_ROUTED_INTF_MAP_LIST	A LIST of ROUTED INTERFACE maps on the device. Each MAP includes a set of named values related to ROUTED INTERFACE configuration.
SYS_FTD_SWITCHED_INTF_MAP_LIST	A LIST of SWITCHED INTERFACE maps on the device. Each MAP includes a set of named values related to SWITCHED INTERFACE configuration.
SYS_FTD_INLINE_INTF_MAP_LIST	A LIST of INLINE INTERFACE maps on the device. Each MAP includes a set of named values related to INLINE set INTERFACE configuration.
SYS_FTD_PASSIVE_INTF_MAP_LIST	A LIST of PASSIVE INTERFACE maps on the device. Each MAP includes a set of named values related to PASSIVE INTERFACE configuration.
SYS_FTD_INTF_BVI_MAP_LIST	A LIST of Bridge Virtual INTERFACE maps on the device. Each MAP includes a set of named values related to BVI configuration.
SYS_FW_INTERFACE_HARDWARE_ID_LIST	A LIST of the HARDWARE names for interfaces on the device, such as GigabitEthernet0/0.

NAME	Description
SYS_FW_INTERFACE_NAME_LIST	A LIST of logical names for interfaces on the device, such as inside.
SYS_FW_INLINE_INTERFACE_NAME_LIST	A LIST of logical names for interfaces configured as PASSIVE or ERSPAN PASSIVE.
SYS_FW_NON_INLINE_INTERFACE_NAME_LIST	A LIST of logical names for interfaces that are NOT part of INLINE sets, such as all ROUTED interfaces.

Predefined FlexConfig objects

The predefined FlexConfig objects provide tested configurations for select features. Use these objects if you need to configure these features, which otherwise cannot be configured using the management center. Note that some objects might become obsolete as features are added to the GUI.

This table lists the available objects. Make note of the associated text objects. You must edit these text objects to customize the behavior of the predefined FlexConfig object. The text objects make it possible for you to customize the configuration using the IP addresses and other attributes required by your network and device.

If you need to modify a predefined FlexConfig object, copy the object, make changes to the copy, and save it with a new name. You cannot directly edit a predefined FlexConfig object.

Although you might be able to configure other ASA-based features using FlexConfig, the configuration of those features has not been tested. If an ASA feature overlaps with something that you can configure in Firewall Management Center policies, do not attempt to configure it through FlexConfig.

For example, Snort inspection includes the HTTP protocol, so do not enable ASA-style HTTP inspection. You cannot add **http** to the enableInspectProtocolList object; this restriction prevents you from misconfiguring your device. Instead, configure the access control policy to perform application or URL filtering, as needed, to implement your HTTP inspection requirements.

Table 2: Predefined FlexConfig objects

FlexConfig Object Name	Description	Associated Text Objects
Default_Inspection_Protocol_Disable	Disables protocols in the global_policy default policy map.	disableInspectProtocolList
Default_Inspection_Protocol_Enable	Enables protocols in the global_policy default policy map.	enableInspectProtocolList
Inspect_IPv6_Configure	Configures IPv6 inspection in the global_policy policy map, logging and dropping traffic based on IPv6 header contents.	IPv6RoutingHeaderDropLogList, IPv6RoutingHeaderLogList, IPv6RoutingHeaderDropList.
Inspect_IPv6_UnConfigure	Clears and disables IPv6 inspection.	—
ISIS_Configure	Configures global parameters for IS-IS routing.	isIsNet, isIsAddressFamily, isISType

FlexConfig Object Name	Description	Associated Text Objects
ISIS_Interface_Configuration	Interface level IS-IS configuration.	isIsAddressFamily, IsIsIntfList Also uses the system variable SYS_FTD_ROUTED_INTF_MAP_LIST
ISIS_Unconfigure	Clears the IS-IS router configuration on the device.	—
ISIS_Unconfigure_All	Clears the IS-IS router configuration from the device, including the router assignment from the device interface.	—
NGFW_TCP_NORMALIZATION	Modifies the default TCP normalization configuration.	—
Policy_Based_Routing	To use this example configuration, copy it, modify the interface name, and use the r-map-object text object to identify a route map object in the object manager.	—
Policy_Based_Routing_Clear	Clears Policy Based Routing configurations from the device.	—
Sysopt_AAA_radius	Ignores the authentication key in RADIUS accounting responses.	—
Sysopt_AAA_radius_negate	Negates the Sysopt_AAA_radius configuration.	—
Sysopt_basic	Configures sysopt wait time , maximum segment size for TCP packets, and detailed traffic statistics.	tcpMssMinimum, tcpMssBytes
Sysopt_basic_negate	Clears sysopt_basic detailed traffic statistics, wait time, and TCP maximum segment size.	—
Sysopt_clear_all	Clears all sysopt configurations from the device.	—
Sysopt_noproxyarp	Configures noproxy-arp CLIs.	Uses system variable SYS_FW_NON_INLINE_INTF_NAME_LIST
Sysopt_noproxyarp_negate	Clears Sysopt_noproxyarp configurations.	Uses system variable SYS_FW_NON_INLINE_INTF_NAME_LIST
Sysopt_Preserve_Vpn_Flow	Configures syopt preserve VPN flow.	—
Sysopt_Preserve_Vpn_Flow_negate	Clears the Sysopt_Preserve_Vpn_Flow configuration.	—
Sysopt_Reclassify_Vpn	Configures sysopt reclassify vpn.	—

FlexConfig Object Name	Description	Associated Text Objects
Sysopt_Reclassify_Vpn_Negate	Negates sysopt reclassify vpn.	—
Threat_Detection_Clear	Clear the threat detection TCP Intercept configuration.	—
Threat_Detection_Configure	Configure threat detection statistics for attacks intercepted by TCP Intercept.	threat_detection_statistics
Wccp_Configure	This template provides an example for configuring WCCP.	isServiceIdentifier, serviceIdentifier, wccpPassword
Wccp_Configure_Clear	Clears WCCP configurations.	—

Deprecated FlexConfig objects

This table lists objects that configure features you can now configure natively in the GUI. Discontinue using these objects at the earliest convenience.

Table 3: Deprecated predefined FlexConfig objects

Deprecated Version	FlexConfig Object	Description	Now Configure In
7.3	DHCPv6_Prefix_Delegation_Configure	Configure one outside (Prefix Delegation client) and one inside interface (recipient of delegated prefix) for IPv6 prefix delegation. To use this template, copy it and modify the variables. Associated text objects: pdoutside, pdinside Also uses the system variable SYS_FTD_ROUTED_INTF_MAP_LIST	Interface IPv6 Settings.
7.3	DHCPv6_Prefix_Delegation_UnConfigure	Removes the DHCPv6 prefix delegation configuration.	Interface IPv6 Settings.
6.3	Default_DNS_Configure	Configure the Default DNS group, which defines the DNS servers that can be used when resolving fully-qualified domain names on the data interfaces. Associated text objects: defaultDNSNameServerList, defaultDNSParameters	Platform settings.

Deprecated Version	FlexConfig Object	Description	Now Configure In
6.3	DNS_Configure	Configure DNS servers in a non-default DNS server group. Copy the object to change the name of the group.	**DNS Server Group** in the object manager.
6.3	DNS_UnConfigure	Removes the DNS server configuration performed by Default_DNS_Configure and DNS_Configure. Copy the object to change the DNS server group names if you altered DNS_Configure.	**DNS Server Group** in the object manager.
7.2	Eigrp_Configure	Configures EIGRP routing next-hop, auto-summary, router-id, eigrp-stub. Associated text objects: eigrpAS, eigrpNetworks, eigrpDisableAutoSummary, eigrpRouterId, eigrpStubReceiveOnly, eigrpStubRedistributed, eigrpStubConnected, eigrpStubStatic, eigrpStubSummary	For all EIGRP objects, see EIGRP. The system does allow you to deploy post-upgrade, but also warns you to redo your EIGRP configurations. To help you with this process, we provide a command-line migration tool.
7.2	Eigrp_Interface_Configure	Configures EIGRP interface authentication mode, authentication key, hello interval, hold time, split horizon. Associated text objects: eigrpIntfList, eigrpAS, eigrpAuthKey, eigrpAuthKeyId, eigrpHelloInterval, eigrpHoldTime, eigrpDisableSplitHorizon Also uses the system variable SYS_FTD_ROUTED_INTF_MAP_LIST	
7.2	Eigrp_Unconfigure	Clears EIGRP configuration for an autonomous system from the device.	
7.2	Eigrp_Unconfigure_all	Clears all EIGRP configurations.	
7.4	Netflow_Add_Destination	Creates and configures a Netflow export destination. Associated text objects: Netflow_Destinations, netflow_Event_Types	Platform settings.
7.4	Netflow_Clear_Parameters	Restores Netflow export global default settings.	Platform settings.

Deprecated Version	FlexConfig Object	Description	Now Configure In
7.4	Netflow_Delete_Destination	Deletes a Netflow export destination. Associated text objects: Netflow_Destinations, netflow_Event_Types	Platform settings.
7.4	Netflow_Set_Parameters	Sets global parameters for Netflow export. Associated text objects: netflow_Parameters	Platform settings.
6.3	TCP_Embryonic_Conn_Limit	Configures embryonic connection limits to protect against SYN Flood Denial of Service (DoS) attacks. Associated text objects: tcp_conn_misc, tcp_conn_limit	Service policy.
6.3	TCP_Embryonic_Conn_Timeout	Configures embryonic connection timeouts to protect against SYN Flood Denial of Service (DoS) attacks. Associated text objects: tcp_conn_misc, tcp_conn_timeout	Service policy.
7.2	VxLAN_Clear_Nve	Removes the NVE 1 configured when VxLAN_Configure_Port_And_Nve is used from the device.	For all VxLAN objects, see Configure VXLAN Interfaces. If you configured VXLAN interfaces with FlexConfig in a previous version, they continue to work. In fact, FlexConfig takes precedence in this case—if you redo your VXLAN configurations in the web interface, remove the FlexConfig settings.
7.2	VxLAN_Clear_Nve_Only	Clears the NVE configured on the interface when deployed.	
7.2	VxLAN_Configure_Port_And_Nve	Configures VLAN port and NVE 1. Associated text objects: vxlan_Port_And_Nve	

Deprecated Version	FlexConfig Object	Description	Now Configure In
7.2	VxLAN_Make_Nve_Only	Sets an interface for NVE only. Associated text objects: vxlan_Nve_Only Also uses system variables SYS_FTD_ROUTED_MAP_LIST and SYS_FTD_SWITCHED_INTF_MAP_LIST	
7.2	VxLAN_Make_Vni	Creates a VNI interface. After deploying this you have to unregister and re-register the device to properly discover the VNI interface. Associated text objects: vxlan_Vni	

Predefined text objects

There are several predefined text objects. These objects are associated with variables used in the predefined FlexConfig objects. In most cases, you must edit these objects to add values if you use the associated FlexConfig object, or you will see errors during deployment. Although some of these objects contain default values, others are empty.

For information on editing text objects, refer to Configure FlexConfig text objects, on page 29.

Name	Description	Associated FlexConfig Object
defaultDNSNameServerList (Deprecated.)	The DNS server IP address to configure in the Default DNS group. Starting with version 6.3, configure DNS for the data interfaces in the Threat Defense Platform Settings policy.	Default_DNS_Configure
defaultDNSParameters (Deprecated.)	The parameters to control DNS behavior for the default DNS server group. The object contains separate entries, in order, for retries, timeout, expire-entry-timer, poll-timer, domain-name. Starting with version 6.3, configure DNS for the data interfaces in the Threat Defense Platform Settings policy.	Default_DNS_Configure
disableInspectProtocolList	Disables protocols in the default policy map (global_policy).	Disable_Default_Inspection_Protocol
dnsNameServerList	The DNS server IP address to configure in a user-defined DNS group.	DNS_Configure

Name	Description	Associated FlexConfig Object
dnsParameters	The parameters to control DNS behavior for a non-default DNS server group. The object contains separate entries, in order, for retries, timeout, domain-name, name-server-interface.	DNS_Configure
enableInspectProtocolList	Enables protocols in the default policy map (global_policy). You are prevented from adding protocols whose inspection conflicts with Snort inspection.	Enable_Default_Inspection_Protocol
IPv6RoutingHeaderDropList	The list of IPv6 routing header types that you want to disallow. IPv6 inspection drops packets that contain these headers without logging the drop.	Inspect_IPv6_Configure
IPv6RoutingHeaderDropLogList	The list of IPv6 routing header types that you want to disallow and log. IPv6 inspection drops packets that contain these headers and sends a syslog message about the drop.	Inspect_IPv6_Configure
IPv6RoutingHeaderLogList	The list of IPv6 routing header types that you want to allow but log. IPv6 inspection allows packets that contain these headers, but sends a syslog message about the existence of the header.	Inspect_IPv6_Configure
isIsAddressFamily	The IPv4 or IPv6 address family.	ISIS_Configure ISIS_Interface_Configuration
IsIsIntfList	List of logical interface names.	ISIS_Interface_Configuration
isIsISType	IS Type (level-1, level-2-only or level-1-2).	ISIS_Configure
isIsNet	Network entity.	ISIS_Configure
isServiceIdentifier	When false, uses the standard **web-cache** service identifier.	Wccp_Configure
netflow_Destination	Defines a single NetFlow export destination's interface, destination, and UDP port number.	Netflow_Add_Destination
netflow_Event_Types	Defines the types of events to be exported for a destination as any subset of: **all**, **flow-create**, **flow-defined**, **flow-teardown**, **flow-update**.	Netflow_Add_Destination

Name	Description	Associated FlexConfig Object
netflow_Parameters	Provides the NetFlow export global settings: active refresh interval (number of minutes between flow update events), delay (flow create delay in seconds; default 0 = command will not appear), and template time-out rate in minutes.	Netflow_Set_Parameters
PrefixDelegationInside	Configures the inside interface for DHCPv6 prefix delegation. The object includes multiple entries, in order, interface name, IPv6 suffix with prefix length, and prefix pool name.	None, but could be used with a copy of DHCPv6_Prefix_Delegation_Configure.
PrefixDelegationOutside	Configure the outside DHCPv6 prefix delegation client. The object includes multiple entries, in order, interface name and IPv6 prefix length	None, but could be used with a copy of DHCPv6_Prefix_Delegation_Configure.
serviceIdentifier	Dynamic WCCP service identifier number.	Wccp_Configure
tcp_conn_limit (Deprecated.)	Parameters used for configuring the TCP embryonic connection limits. Starting with version 6.3, configure these features in the Threat Defense Service Policy, which you can find on the Advanced tab of the access control policy assigned to the device.	TCP_Embryonic_Conn_Limit
tcp_conn_misc (Deprecated.)	Parameters used for configuring the TCP embryonic connection settings. Starting with version 6.3, configure these features in the Threat Defense Service Policy, which you can find on the Advanced tab of the access control policy assigned to the device.	TCP_Embryonic_Conn_Limit, TCP_Embryonic_Conn_Timeout
tcp_conn_timeout (Deprecated.)	Parameters used for configuring the TCP embryonic connection timeouts. Starting with version 6.3, configure these features in the Threat Defense Service Policy, which you can find on the Advanced tab of the access control policy assigned to the device.	TCP_Embryonic_Conn_Timeout
tcpMssBytes	Maximum segment size in bytes.	Sysopt_basic
tcpMssMinimum	Checks whether to set maximum segment size (MSS), which is set only if this flag is true.	Sysopt_basic

Name	Description	Associated FlexConfig Object
threat_detection_statistics	Parameters used for threat detection statistics for TCP Intercept.	Threat_Detection_Configure
vxlan_Nve_Only	Parameters for configuring NVE-only on interface: • logical name of interface • IPv4 address (optional for routed interface) • IPv4 netmask (optional for routed interface)	VxLAN_Make_Nve_Only
vxlan_Port_And_Nve	Parameters used for configuring ports and NVE for VXLAN: • vxlan port • source interface (logical name) • type (peer or mcast) • Peer IP Address or default-mcast-group	VxLAN_Configure_Port_And_Nve
vxlan_Vni	Parameters used for creating VNI: • Interface number (1-10000) • segment-id (1-16777215) • nameif (Logical Name of the interface) • type (routed or transparent) • IP address (used in case of routed mode device) or bridge-group number (used in case of transparent mode device) • netmask (If device is in routed mode) or unused	VxLAN_Make_Vni
wccpPassword	WCCP password.	Wccp_Configure

Requirements and prerequisites for FlexConfig policies

This topic outlines the model support, domain requirements, and user role prerequisites required to configure and deploy FlexConfig policies.

Model support

Firewall Threat Defense

Supported domains

Any

User roles

Admin

Guidelines and limitations for FlexConfig

Be cautious with FlexConfig deployments, as configuration mistakes trigger rollbacks that can disrupt your network.

- If you make a mistake in the FlexConfig policy, the system will roll back all changes included in the deployment attempt that includes the failed FlexConfig. Because rollback due to a failed deployment includes clearing the configuration, this can be disruptive to your network.
- Consider timing deployments that include FlexConfig changes to non-business hours. Also, consider isolation the deployment so it includes just FlexConfig changes, and no other policy updates.

When you use the VxLAN_Make_VNI object, you must deploy the same FlexConfig to all units in a cluster or high availability pair before you form the cluster or high availability pair. The Management Center requires the VXLAN interfaces to match on all devices before forming the cluster or high availability pair.

The **webvpn keepout** command must be configured only within the global webvpn configuration mode. The webvpn group-policy attributes or username attributes configuration modes do not support the **keepout** command. Do not include the **keepout** command in a group-policy FlexConfig object.

If you configure any service that applies to connections, such as SIP inspection, go to the device CLI and enter the **clear conn** command to clear connections. When the connections are rebuilt, the new configuration is applied to the sessions.

QoS rules and service policy rules (in the access control policy) are translated to commands on the firewall. This includes creating policy maps. There can be only one policy map per interface. The system automatically combines QoS and service policy configurations in a single policy map per interface.

However, you can also create policy maps manually using FlexConfig. For lower-end firewalls, such as the Secure Firewall 3100, you can create up to 64 policy maps in the configuration. For more powerful firewalls, such as the Firepower 4100, you can create up to 128. Be careful not to exceed this limit, or deployment will fail. You can view the device configuration from the CLI or use the deployment transcript to see how rules are translated to commands.

Customize device configuration with FlexConfig policies

Use FlexConfig policies to customize the configuration of a Firewall Threat Defense device when standard configuration methods are insufficient.

Before using FlexConfig, try to configure all the policies and settings you need using the other features in Firewall Management Center. FlexConfig is a method of last resort to configure ASA-based features that are

compatible with Firewall Threat Defense but which are not otherwise configurable in Firewall Management Center.

Before you begin

Follow these steps to customize device configuration with FlexConfig policies:

Procedure

Step 1 Determine the CLI command sequence that you want to configure.

If you have a functioning configuration on an ASA device, use **show running-config** to get the sequence of commands that you need. Make adjustments to items such as interface names and IP addresses as needed.

If this is for a new feature, it is best to try to implement it on an ASA device in a lab setting to verify that you have the correct command sequence.

For more information, see the following topics:

- Recommended usage for FlexConfig policies, on page 2
- CLI commands in FlexConfig objects, on page 2

Step 2 Choose **Objects** > **Object Management** > **FlexConfig** > **FlexConfig Object**.

Examine the predefined FlexConfig objects to determine if any will be able to generate the commands you need. Click **View** () to see the object contents. If an existing object is close to what you want, start by making a copy of the object, and then edit the copy. See Predefined FlexConfig objects, on page 14.

Examining the objects will also give you an idea of the structure, command syntax, and expected sequencing for a FlexConfig object.

Note
If you find any objects that you will use, either directly or as copies, examine the Variables list at the bottom of the object. Make note of the variable names, except those in all capitals that start with SYS, which are system variables. These variables are text objects that you will probably need to edit and define overrides for, especially if the default value column shows the object has no value.

Step 3 If you need to create your own FlexConfig objects, determine what variables you will need and create the associated objects.

The CLI you need to deploy might contain IP addresses, interface names, port numbers, and other parameters that you might want to adjust over time. These are best isolated into variables, which point to objects that contain the necessary values. You might also need variables for strings that are part of the configuration and could change over time.

Also, determine if you need different values for each device to which you will assign the policy. For example, you might want to configure the feature on three devices, but you might need to specify a different interface name or IP address on a given command for each of these devices. If you need to customize the object for each device, ensure that you enable overrides when creating the object and then define the override values per device.

See the list of topics for an explanation of the various types of variables and how to configure the related objects when necessary.

- FlexConfig variables, on page 6

- FlexConfig policy object variables, on page 12
- FlexConfig system variables, on page 13
- Configure FlexConfig text objects, on page 29

Step 4 If you are using the predefined FlexConfig objects, edit the text objects used as variables.

See Configure FlexConfig text objects, on page 29.

Step 5 (If necessary) Configure FlexConfig objects, on page 25.

You need to create objects only if the predefined objects cannot do the job.

Step 6 Configure the FlexConfig policy, on page 31.

a) Set target devices for a FlexConfig policy, on page 32.

You can also assign the policy to devices when you create the policy. The policy must have at least one assigned device before you can preview it.

b) Preview the FlexConfig policy, on page 33.

You must save changes before you can preview the policy.

Verify that the generated commands are the ones intended, and that all variables are resolving correctly.

Step 7 Choose **Deploy** > **Deployment** in the menu bar.

a) Select the devices assigned to the policy, and click **Deploy**.

Wait for deployment to complete.

Step 8 Verify the deployed configuration, on page 34.

Step 9 (If necessary) Remove features configured using FlexConfig, on page 36.

Unlike other types of policy, simply unassigning a FlexConfig from a device might not remove the related configuration. If you want to remove a FlexConfig-generated configuration, follow the cited procedure.

If you are removing a feature because it is now directly supported by the product, check Convert from FlexConfig to managed feature, on page 37.

Configure FlexConfig objects

Before you begin

Keep the following in mind:

- FlexConfig objects translate into commands that are then deployed to the device. These commands are already issued in global configuration mode. Therefore, do not include the **enable** and **configure terminal** commands as part of the FlexConfig object.
- Determine what types of variables you will need, and create any policy objects that you will require. You cannot create objects for variables while editing a FlexConfig object.
- Ensure that your commands do not conflict in any way with the VPN or access control configuration on the devices.

- If there is more than one set of commands for an interface, only the last set of commands is deployed. Therefore, we recommend you not use beginning and ending commands to configure interfaces. For an example of configuring interfaces, refer to the ISIS_Interface_Configuration predefined FlexConfig object.

There are several predefined FlexConfig objects that you can use directly, or you can make copies if you need to edit them. You can also create your own objects from scratch. A FlexConfig object's content can range from a single simple command string to elaborate CLI command structures that use variables and scripting commands to deploy commands whose content can differ from device to device or deployment to deployment.

You can also create FlexConfig policy objects when defining FlexConfig policies.

Procedure

Step 1 Choose **Objects** > **Object Management** > **FlexConfig** > **FlexConfig Object** .

Step 2 Do one of the following:

- Click **Add FlexConfig Object** to create a new object.
- Click **Edit** ( ) to edit an existing object.
- Click **View** ( ) to see the contents of a predefined object.
- If you want to edit a predefined object, click **Clone** ( ) to create a new object with the same contents.

Step 3 Enter a **Name** and optionally, a description for the object.

Step 4 In the object body area, enter the commands and instructions to produce the required configuration.

The object content is a sequence of scripting commands and configuration commands that generate a valid ASA software command sequence. The Firewall Threat Defense device uses ASA software commands to configure some features. For more information on scripting and configuration commands, refer to:

- Template scripts, on page 6
- CLI commands in FlexConfig objects, on page 2

You can use variables to supply information that can be known only at runtime, or which can differ from device to device. You simply type in processing variables, but you must use the **Insert** menu to add variables that are associated with policy objects or system variables, or which are secret keys. For a complete discussion of variables, refer to FlexConfig variables, on page 6 .

- To insert system variables, choose **Insert** > **Insert System Variable** > ***Variable Name*** . For a detailed explanation of these variables, see FlexConfig system variables, on page 13 .
- To insert policy object variables, choose **Insert** > **Insert Policy Object** > ***Object Type*** , selecting the appropriate type of object. Then, give the variable a name (which can be the same name as the associated policy object), select the object to associate with the variable, and click **Save** . For a detailed explanation of these types, see FlexConfig policy object variables, on page 12 . For more detail on the procedure, see Add a policy object variable to a FlexConfig object, on page 28 .
- To insert secret key variables, choose **Insert** > **Secret Key** and define the variable name and value. For more detail on the procedure, see Configure secret keys, on page 29 .

Note
You must use the **Insert** menu to create a new policy object or system variable. However, for subsequent uses of that variable, you must type it in, $ included. This is also true for system variables: the first time you use it, add it from the **Insert** menu. Then, type it out for subsequent uses. If you use the **Insert** menu more than once for a system variable, the system variable is added to the Variables list multiple times, and the FlexConfig will not validate, meaning you cannot save your changes. For processing variables (those not associated with a policy object or system variable), simply type in the variable. If you are adding a secret key, always use the **Insert** menu. Secret key variables do not show up in the Variables list.

Step 5 Choose the deployment frequency and type.

- **Deployment** —Whether to deploy the commands in the object **Once** or **Everytime** . The only way to choose the right option is to test the results of deployment.

  Start by selecting **Everytime** . Then, after you attach the object to a FlexConfig policy, deploy the configuration. After a successful deployment, come back to the FlexConfig policy and preview the configuration for one of the assigned devices as described in Preview the FlexConfig policy, on page 33 . If the section labeled `###CLI generated from managed features ###` contains commands that clear or negate the commands in the object, and the `###Flex-config Appended CLI ###` section contains the commands to reconfigure the feature, you know that **Everytime** is the right option.

  Even if you do not see negate commands, make some minor change to the device configuration, then run another deployment. If the deployment completes successfully, you can check the deployment transcript (see Verify the deployed configuration, on page 34). If you see that the commands were issued again (even when they were already configured) without error, then you can keep **Everytime** .

  Change to **Once** only if the system does not first negate the commands in the object before issuing them again, or if the deployment results in errors that are specific to the command. In some cases, the system does not allow you to issue a command that is already configured, but this is the exception.

  Some additional tips:

  - If the FlexConfig object points to system-managed objects such as network or ACL objects, choose **Everytime** . Otherwise, updates to the objects might not get deployed.
  - Use **Once** if the only thing you do in the object is to clear a configuration. Then, remove the object from the FlexConfig policy after the next deployment.

- **Type** —Select one of the following:
  - **Append** —(The default.) Commands in the object are put at the end of the configurations generated from the Firewall Management Center policies. You must use Append if you use policy object variables, which point to objects generated from managed objects. If commands generated for other policies overlap with those specified in the object, you should select this option so your commands are not overwritten. This is the safest option.
  - **Prepend** —Commands in the object are put at the beginning of the configurations generated from the Firewall Management Center policies. You would typically use prepend for commands that clear or negate a configuration.

Step 6 (Optional.) Click **Validate** ( ) above the object body to check the integrity of the script.

The object is always validated when you click **Save**. You cannot save an invalid object.

Step 7 Click **Save** .

What to do next

- If an active policy references your object, deploy configuration changes; see Deploy configuration changes.

Add a policy object variable to a FlexConfig object

Insert variables into a FlexConfig policy object that are associated with other types of policy object, allowing the variables to resolve to the names or content of the associated object when the FlexConfig is deployed to a device.

You can insert variables into a FlexConfig policy object that are associated with other types of policy object. When the FlexConfig is deployed to a device, these variables resolve to the names or content of the associated object.

Use the following procedure for the first use of a policy object variable in a FlexConfig object. If you need to refer to the object again, type in the variable (including the $ sign). To understand how to use these variables, see Variable processing, on page 7.

Before you begin

For information on editing a FlexConfig Object, see Configure FlexConfig objects, on page 25.

Procedure

Step 1 While editing a FlexConfig Policy Object, choose **Insert** > **Insert Policy Object** > ***Object Type***, selecting the appropriate type of object.

Step 2 Enter a name for the variable, and optionally, a description.

The name must be unique within the context of the FlexConfig object. It cannot include spaces. You are allowed to use the exact same name as the object associated with the variable.

Step 3 Select the object to associate with the variable and click **Add** to move it to the **Selected Object** list.

You can associate a variable with a single object only.

Note
For text objects, you can select any of the predefined objects as needed. However, many of these objects have no default values. You must update the objects to add the required values either directly or as overrides for the device to which you will deploy the FlexConfig object. Trying to deploy a FlexConfig without updating these objects typically results in deployment errors.

Step 4 Click **Save**.

The variable appears in the Variables list at the bottom of the FlexConfig object editor.

Configure secret keys

Secret keys allow you to mask sensitive information such as passwords in FlexConfig objects, preventing the dissemination of sensitive information while providing special treatment for these variables.

A secret key is any single-string variable whose content you want to mask, such as passwords. The system provides special treatment for these variables to help you prevent the dissemination of sensitive information.

Secret key variables do not show up in the Variables list in the FlexConfig object.

Unlike other types of variables, you can use the **Insert** command every time you need to insert a given secret key variable. With respect to processing, these variables behave like single-value text object variables; see Single value variables, on page 7.



Note Any data defined in a secret key variable is masked from users except when previewing a FlexConfig policy. In addition, if you export a FlexConfig policy, the content of any secret key variable is erased. When you import the policy, you will need to manually edit each secret key variable to enter the data.

Before you begin

For information on editing a FlexConfig Object, see Configure FlexConfig objects, on page 25.

Procedure

Step 1 While editing a FlexConfig Policy Object, choose **Insert** > **Secret Key**.

Step 2 In the **Insert Secret Key** dialog box, do any of the following:

- To create a new key, click **Add Secret Key**, then fill in the following information and click **Add**.
  - **Secret Key Name**—The name of the variable. This name appears in the FlexConfig object prefixed with @.
  - **Password**, **Confirm Password**—The secret string, which is masked with asterisks as you type.
- To insert a secret key variable in the FlexConfig object, select the check box for the variable.
- To edit the value of a secret key variable, click **Edit** ( ) for the variable. Make your changes and click **Add**.
- To delete a secret key variable, click **Delete** ( ) for the variable.

Step 3 Click **Save**.

Configure FlexConfig text objects

Use text objects in FlexConfig objects as the target of policy object variables. During deployment, variables that point to text objects are replaced by the content of the text object.

Use text objects in FlexConfig objects as the target of policy object variables. You can use variables to supply information that can be known only at runtime, or which can differ from device to device. During deployment, variables that point to text objects are replaced by the content of the text object.

Text objects contain free-form strings, which can be keywords, interface names, numbers, IP addresses, and so forth. The content depends on how you will use the information within a FlexConfig script.

Before creating or editing a text object, determine exactly what content you will need. This includes how you intend to process the object, which will help you decide between creating a single string or multiple string object. Read the following topics:

- FlexConfig variables, on page 6
- Variable processing, on page 7

Procedure

Step 1 Choose **Objects** > **Object Management** > **FlexConfig** > **Text Object**.

Step 2 Do one of the following:

- Click **Add Text Object** to create a new object.
- Click **Edit** ( ) to edit an existing object. You are allowed to edit the predefined text objects, which is required if you intended to use the predefined FlexConfig objects.

Step 3 Enter a **Name** and optionally, a description for the object.

Step 4 (New objects only.) Choose a **Variable Type** from the drop-down list:

- **Single**—If the object should contain a single text string.
- **Multiple**—If the object should contain a list of text strings.

You cannot change the variable type after you save the object.

Step 5 If the variable type is **Multiple**, use the up and down arrows to specify a **Count**.

Rows are added or removed from the object as you change the number.

Step 6 Add content to the object.

You can either click in the text box next to a variable number and type in a value, or you can set up device overrides for each device that will be assigned a FlexConfig object that uses the text object. You can also do both, in which case the values configured in the base object act as default values in cases where an override does not exist for a given device.

When editing predefined objects, it is a good practice to use device overrides, so that the system defaults remain in place for other users who might need to use the object in different FlexConfig policies. The approach you take depends on the requirements of your organization.

Tip
Some predefined objects require multiple values where each value serves a specific purpose. Read the description text carefully to determine the expected values in the object. In some cases, the instructions specify that you must use overrides instead of changing the base values. In the case of enableInspectProtocolList, you are prevented from entering protocols whose inspection is incompatible with Snort inspection.

If you decide to use device overrides, do the following.

a) Check the check box of **Allow Overrides**.
b) Expand the Overrides area (if necessary) and click **Add**.

   If an override already exists for the device, click edit for the override to change it.

c) On **Targets** in the Add Object Override dialog box, select the device for which you are defining values and click **Add** to move it to the Selected Devices list.
d) Click **Override**, adjust the **Count** as needed, then click in the variable fields and type in the values for the device.
e) Click **Add**.

Step 7 Click **Save**.

What to do next

- If an active policy references your object, deploy configuration changes; see Deploy configuration changes.

Configure the FlexConfig policy

Configure a FlexConfig policy to manage device configurations using shared policies that can be assigned to multiple devices.

A FlexConfig policy contains two ordered lists of FlexConfig objects, one prepended list and one appended list. For an explanation of prepend/append, see Configure FlexConfig objects, on page 25.

FlexConfig policies are shared policies that you can assign to multiple devices.

Procedure

Step 1 Choose **Devices** > **FlexConfig**.

Step 2 Do one of the following:

- Click **New Policy** to create a new FlexConfig Policy. You are prompted to enter a name. Optionally, select devices in the Available Devices list and click **Add to Policy** to assign devices. Click **Save**.
- Click **Edit** ( ) to edit an existing Policy. You can change the name or description by clicking them in edit mode.
- Click **Copy** ( ) to create a new policy with the same contents. You are prompted for a name. Device assignments are not retained for the copy.
- Click delete to remove a policy you no longer need.

Step 3 Select the FlexConfig objects required for the policy from the **Available FlexConfig** list and click > to add them to the policy.

Objects are automatically added to the prepended or appended list based on the deployment type specified in the FlexConfig object.

To remove a selected object, click **Delete** ( ) next to an object.

Step 4 For each selected object, click **View** ( ) next to the object to identify the variables used in the object.

Except for system variables, which start with SYS, you need to ensure that the objects associated with the variables are not empty. A blank or brackets with nothing between them, [ ], indicate an empty object. You will need to edit these objects before deploying the policy.

Note
If you use object overrides, those values will not show up in this view. Thus, an empty default value does not necessarily mean that you have not updated the object with the required values. Previewing the configuration will show whether the variables resolve correctly for a given device. See Preview the FlexConfig policy, on page 33.

Step 5 Click **Save**.

What to do next

- Set target devices for the policy; see Set target devices for a FlexConfig policy, on page 32.
- Deploy configuration changes; see Deploy configuration changes.

Set target devices for a FlexConfig policy

This task allows you to assign or change device assignments for a FlexConfig policy after creation.

When you create a FlexConfig policy, you can select the devices that use the policy. You can subsequently change device assignments for the policy as described below.

Note Normally, when you unassign a policy from a device, the system automatically removes the associated configuration upon the next deployment. However, because FlexConfig objects are scripts for deploying customized commands, simply unassigning a FlexConfig policy from a device does not remove the commands that were configuring by the FlexConfig objects. If your intention is to remove FlexConfig-generated commands from a device's configuration, refer to Remove features configured using FlexConfig, on page 36.

Procedure

Step 1 Choose **Devices** > **FlexConfig** and edit a FlexConfig policy.

Step 2 Click **Policy Assignments**.

Step 3 On **Targeted Devices**, build your target list:

- Add—Choose one or more **Available Devices**, then click **Add to Policy** or drag and drop into the list of **Selected Devices**. You can assign the policy to devices, high availability pairs, and clustered devices.
- Delete—Click **Delete** ( ) next to a single device, or select multiple devices, right-click, then choose **Delete Selection**.

Step 4 Click **OK** to save your selection.

Step 5 Click **Save** to save the FlexConfig policy.

What to do next

- Deploy configuration changes; see Deploy configuration changes.

Preview the FlexConfig policy

The FlexConfig policy preview allows you to validate and troubleshoot your configuration before deployment. It translates FlexConfig objects into CLI commands and resolves variables based on device-specific configurations.

Preview a FlexConfig policy to see how the FlexConfig objects get translated into CLI commands. The preview shows the commands that will be generated for a selected device from the scripts and variables used in the FlexConfig objects. The variables are resolved based on the configuration for the device, so you get a clear idea of what will be deployed.

Use the preview to look for potential problems in the FlexConfig objects. Correct the objects until the preview shows the expected results.

You must preview the configuration separately for each device, because the variables can resolve differently based on the device configuration.

Procedure

Step 1 Choose **Devices** > **FlexConfig** and edit a FlexConfig policy.

Step 2 If there are any pending changes, click **Save**.

The preview shows results only for those FlexConfig objects that were in the most recently saved version of the policy. You must save the policy to see a preview of newly-added objects.

Step 3 Click **Preview Config**.

Step 4 Choose a device from the **Select Device** drop-down list.

The system retrieves information from the device and configured policies, and determines what CLI commands will be generated on the next deployment to the device. You can select the output and use Ctrl+C to copy it to the clipboard, where you can paste it into a text file for further analysis.

The preview includes the following sections:

- Flex-config Prepended CLI—These are the commands generated by FlexConfigs that are prepended to the configuration.
- CLI generated from managed features—These are commands generated for policies configured in the Firewall Management Center. Commands are generated for new or changed policies since the last successful deployment to the device. These commands do not represent all commands needed to implement the assigned policies. No commands in this section are generated from FlexConfig objects.
- Flex-config Appended CLI—These are the commands generated by FlexConfigs that are appended to the configuration.

Step 5 Click **Close** to close the preview dialog.

Verify the deployed configuration

This task helps you confirm that your FlexConfig policy deployment completed successfully and that the device configuration matches your expectations.

After you deploy a FlexConfig policy to a device, verify that the deployment was successful and that the resulting configuration is what you expected. Also, verify that the device is performing as expected.

Procedure

Step 1 To verify that deployment was successful:

Check the deployment status and review any error messages or warnings.

- Click **Notifications** in the menu bar, which is unnamed between **Deploy** and **System**.

  The icon looks like one of the following, and it might include a number if there are errors:

  - **Indicates No Warnings** — Indicates no warnings or errors are present on the system.
  - Indicates **One or More Warnings** — Indicates one or more warnings and no errors are present on the system.
  - **Indicates One or More Errors** — Indicates one or more errors and any number of warnings are present on the system.

- On **Deployments**, verify that the deployment was successful.
- To see more detailed information, especially for failed deployments, click **Show History**.
- Select the deployment job in the list of jobs in the left column.

  Jobs are listed in reverse chronological order, with the most recent job at the top of the list.

- Click download in the **Transcript** column for the device in the right column.

  The deployment transcript includes commands sent to the device, and any responses returned from the device. These response can be informative messages or error messages. For failed deployments, look for messages that indicate errors with the commands that you sent through FlexConfig. These errors can help you correct the script in the FlexConfig object that is trying to configure the commands.

  Note
  There is no distinction made in the transcript between commands sent for managed features and those generated from FlexConfig policies.

  For example, the following sequence shows that Firewall Management Center sent commands to configure GigabitEthernet0/0 with the logical name outside. The device responded that it automatically set the security level to 0. Firewall Threat Defense does not use the security level for anything. Messages relevant to FlexConfig are in the CLI Apply section of the transcript.

```
========= CLI APPLY =========
```

```
FMC >> interface GigabitEthernet0/0
FMC >>  nameif outside
FTDv 192.168.0.152 >> [info] : INFO: Security level for "outside" set to 0 by default.
```

Step 2 Verify that the deployed configuration includes the expected commands.

You can do this by making an SSH connection to the device's management IP address. Use the **show running-config** command to view the configuration.

Alternatively, use the CLI tool within Secure Firewall Management Center.

- Choose **System** (⚙) > **Health** > **Monitor** and click the name of the device.

  You might need to click the open/close arrow in the **Count** column in the Status table to see any devices.

- Click **Advanced Troubleshooting**.
- Click **Threat Defense CLI**.
- Select **show** as the command, and type **running-config** as the parameter.
- Click **Execute**.

  The running configuration appears in the text box. You can select the configuration and press Ctrl+C, then paste it into a text file for later analysis.

Step 3 Verify that the device is performing as expected.

Use the **show** commands related to the feature to see detailed information and statistics. For example, if you enabled additional protocol inspections, the **show service-policy** command provides this information. The exact commands to use are feature-dependent and should be mentioned in the ASA configuration guide and command reference you used to learn how to configure the feature.

If commands that show statistics indicate that numbers are not changing (for example, hit counts, connection counts, and so forth), the configuration might be valid but not meaningful. If you know that traffic is going through the device that should show up in statistics, look for what is missing in your configuration. For example, NAT or access rules might be dropping or changing traffic before a feature can act on it.

You can use the **show** commands from an SSH session or through the Firewall Management Center CLI tool.

However, if the **show** command that you need to use is not available directly within the Firewall Threat Defense CLI, you will need make an SSH connection to the device to use the commands. From the CLI, enter the following command sequence to enter Privileged EXEC mode within the diagnostic CLI. From there, you should be able to enter these otherwise unsupported **show** commands.

```
> system support diagnostic-cli
Attaching to Diagnostic CLI ... Press 'Ctrl+a then d' to detach.
Type help or '?' for a list of available commands.
firepower> enable
Password: <press enter, do not enter a password>
firepower#
```

Remove features configured using FlexConfig

This task allows you to manually remove configuration commands that were deployed using FlexConfig when unassigning the FlexConfig policy from a device might not remove all of the configuration.

If you decide you need to remove a set of configuration commands you configured using FlexConfig, you might need to manually remove that configuration. Unassigning the FlexConfig policy from a device might not remove all of the configuration.

To manually remove the configuration, you create new FlexConfig objects to clear or negate the configuration commands.

Before you begin

To determine if you need to manually remove some or all of the configuration generated by an object:

1. Examine the configuration preview, as described in Preview the FlexConfig policy, on page 33. If the **###CLI generated from managed features ###** section contains the clear or negate commands to remove all of the commands in the FlexConfig object, then you can simply remove the object from the FlexConfig policy, save, and redeploy.
2. Remove the object from the FlexConfig policy, save the change, then preview the configuration again. If the **###CLI generated from managed features ###** section still does not include the required clear or negate commands, you must follow this procedure to manually remove the configuration.

Follow these steps to remove features configured using FlexConfig:

Procedure

Step 1 Choose **Objects** > **Object Management** and create the FlexConfig Objects to clear or negate the configuration commands.

If a feature has a **clear** command that can remove all configuration settings, then use that command. For example, the predefined ISIS_Unconfigure_All object contains a single command that removes all ISIS-related configuration commands:

```
clear configure router isis
```

If there is not a **clear** command for the feature, you need to use the **no** form of each command you want to remove. For example, the predefined Sysopt_basic_negate object removes the commands configured through the predefined Sysopt_basic object.

```
no sysopt traffic detailed-statistics
```

```
no sysopt connection timewait
```

You would typically configure a FlexConfig object that removes configurations as a prepended, deploy once object.

Step 2 Choose **Devices** > **FlexConfig** and create a new FlexConfig policy or edit the existing policy.

If you want to preserve the FlexConfig policy that deploys the configuration commands, create a new policy specifically for negating the commands, and assign the devices to the policy. Then, add the new FlexConfig objects to the policy.

If you want to completely remove the FlexConfig configuration objects from all devices, you can simply delete those commands from the existing FlexConfig policy and replace them with the objects that negate the configuration.

Step 3 Click **Save** to save the FlexConfig policy.

Step 4 Click **Preview Config** and verify that the clear and negation commands are generating correctly.

Step 5 Choose **Deploy** > **Deployment** in the menu bar, select the device, and click **Deploy**.

Wait for deployment to complete.

Step 6 Verify that the commands were removed.

View the running configuration on the device to confirm that the commands are removed. For more detailed information, see Verify the deployed configuration, on page 34.

Step 7 While editing the FlexConfig policy, click **Policy Assignments** and remove the device. Optionally, remove the FlexConfig Objects from the policy.

Assuming that the FlexConfig policy simply removes the unwanted configuration commands, there is no need to keep the policy assigned to the device after the removal is complete.

However, if the FlexConfig policy retains options that you still want configured on the device, remove the negation objects from the policy. They are no longer needed.

Convert from FlexConfig to managed feature

This procedure converts deprecated FlexConfig commands to newly supported managed features after a software upgrade.

Each software release adds managed features to the product. These are features you configure directly through policies controlled outside of FlexConfig. This can deprecate FlexConfig commands that you are currently using. Your configurations are not automatically converted. After the upgrade, you cannot assign or create FlexConfig objects using the newly deprecated commands. After upgrading software, examine your FlexConfig policies and objects.

If a feature configured through FlexConfig becomes available as a managed feature, convert the configuration to the managed feature instead of using FlexConfig. In most cases, your existing FlexConfig configurations continue to work after the upgrade, and you can still deploy. However, using deprecated commands may cause deployment issues in certain situations. Configuring a feature in both the GUI and FlexConfig is not supported.

Note Use the migration tool instead of this procedure if the tool supports the feature configuration you are migrating.

Procedure

Step 1 Remove the FlexConfig, as explained in Remove features configured using FlexConfig, on page 36.

Step 2 Configure the settings in the newly supported managed feature.

The release notes have a list of new features for the release.

Examples for FlexConfig

This topic provides a collection of practical examples for implementing FlexConfig policies.

Configure precision time protocol (ISA 3000)

The Precision Time Protocol (PTP) is a time-synchronization protocol developed to synchronize the clocks of various devices in a packet-based network. These device clocks are generally of varying precision and stability. The protocol is designed specifically for industrial, networked measurement and control systems, and is optimal for use in distributed systems because it requires minimal bandwidth and little processing overhead.

A PTP system is a distributed, networked system consisting of a combination of PTP and non-PTP devices. PTP devices include ordinary clocks, boundary clocks and transparent clocks. Non-PTP devices include network switches, routers and other infrastructure devices.

You can configure the Firewall Threat Defense device to be a transparent clock. The Firewall Threat Defense device does not synchronize its clock with the PTP clocks. The Firewall Threat Defense device will use the PTP default profile, as defined on the PTP clocks.

When you configure the PTP devices, you define a domain number for the devices that are meant to function together. Thus, you can configure multiple PTP domains, and then configure each non-PTP device to use the PTP clocks for one specific domain.

Before you begin

Determine the domain number configured on the PTP clocks that the device should use. This example assumes the PTP domain number is 10. Also, determine the interfaces through which the system can reach the PTP clocks in the domain.

These are the guidelines for configuring PTP.

- This feature is only available on the Cisco ISA 3000 appliance.
- Cisco PTP supports multicast PTP messages only.
- PTP is available only for IPv4 networks, not for IPv6 networks.
- PTP configuration is supported on physical Ethernet data interfaces, whether stand-alone or bridge group members. It is not supported on the management interface, subinterfaces, EtherChannels, Bridge Virtual Interfaces (BVI), or any other virtual interfaces.

- PTP flows on VLAN subinterfaces are supported, assuming the appropriate PTP configuration is present on the parent interface.
- You must ensure that PTP packets are allowed to flow through the device. PTP traffic is identified by UDP destination ports 319 and 320, and destination IP address 224.0.1.129, so any access control rule that allows this traffic should work.
- In Routed firewall mode, you must enable multicast routing for PTP multicast groups. In addition, if an interface on which you enable PTP is **not** in a bridge group, you must configure the interface to join the IGMP multicast group 224.0.1.129. If the physical interface is a bridge group member, you do not configure it to join the IGMP multicast group.

Follow these steps to configure Precision Time Protocol on an ISA 3000 device:

Procedure

Step 1 (Routed mode only) Enable Multicast routing, and configure the IGMP group for the interfaces.

In Routed mode, you must enable Multicast routing. In addition, for stand-alone physical interfaces, that is, those that are not bridge group members, you must also configure the interface to join the 224.0.1.129 IGMP group. You cannot configure bridge group members to join an IGMP group, but PTP configuration on bridge group members will work without the IGMP join.

Perform this procedure for each device on which you will configure PTP.

Note
Write down the hardware names of each PTP-clock-facing interface on each device, for example, GigabitEthernet1/1.

a) Choose **Devices** > **Device Management**, and edit the device.
b) Click **Routing**.
c) Choose **Multicast Routing** > **IGMP**.
d) Check the **Enable Multicast Routing** check box.
e) Click **Join Group**.
f) Click **Add**, and in the **Add IGMP Join Group Parameters** dialog box, configure the following options and click **OK**.
   - **Interface**—Select the PTP-clock-facing stand-alone interface.
   - **Join Group**—Click **+** to add a new network object. Create a Host object with the address 224.0.1.129. When configuring additional interfaces, simply select this object. (See Create a network object.)

   Repeat this step for each PTP-clock-facing stand-alone interface on the device.
g) Click **Save** on the Routing page.

Step 2 Create the FlexConfig object to enable PTP globally and on the interface.


This procedure assumes that the PTP-clock-facing interface is the same on every device you are configuring. If you have used different interfaces on different devices, you need to create separate objects for each distinct combination. For example, if you use GigabitEthernet1/1 on devices A and B, GigabitEthernet1/2 on devices C and D, and both GigabitEthernet1/1 and 1/2 on devices E and F, you need 3 separate FlexConfig objects, and subsequently, 3 separate FlexConfig policies (explained in the next step).

a) Choose **Objects** > **Object Management** > **FlexConfig** > **FlexConfig Object**.
b) Click **Add FlexConfig Object**, configure the following properties, and click **Save**.

- **Name**—The object name. For example, Enable_PTP.
- **Deployment**—Select **Everytime**. You want this configuration to be sent in every deployment to ensure it remains configured.
- **Type**—Keep the default, **Append**. The commands are sent to the device after the commands for directly-supported features. This ensures that any other changes you make to interface configuration are configured before these commands.
- **Object body**—In the object body, type the commands needed to configure PTP globally and on each PTP-clock-facing interface. For example, the commands needed for the global configuration for PTP domain 10 and the interface configuration on GigabitEthernet1/1 are:

```
ptp mode e2etransparent
ptp domain 10
interface gigabitethernet1/1
 ptp enable
```

The object body should look similar to the following:

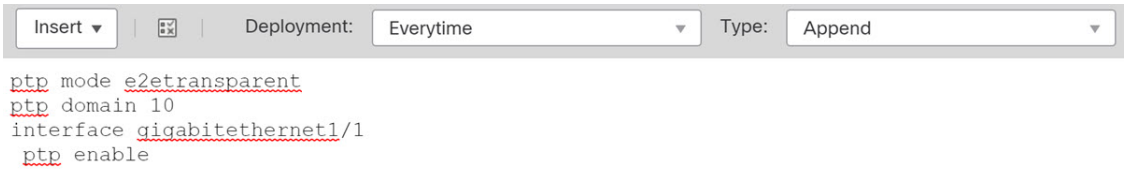

Step 3 Create the FlexConfig policy and assign it to the devices.


If you created multiple FlexConfig objects for different combinations of PTP-clock-facing interfaces, you need to create separate FlexConfig policies for each object, and assign those policies to the correct devices based on the interfaces you need to configure. Repeat this procedure for each group of devices.

a) Choose **Devices** > **FlexConfig**.
b) Either click **New Policy**, or if an existing FlexConfig policy should be assigned to (or is already assigned to) the target devices, simply edit that policy.

When creating a new policy, assign the target devices to the policy in the dialog box where you name the policy.

c) Select the PTP FlexConfig object in the **User Defined** folder in the table of contents and click > to add it to the policy.

The object should be added to the **Selected Appended FlexConfigs** list.

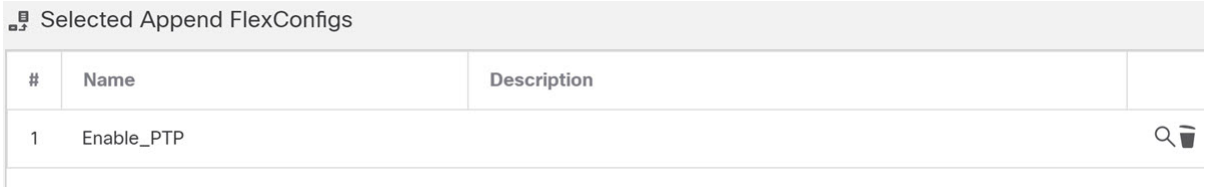

d) Click **Save**.

e) If you have not yet assigned all the targeted devices to the policy, click the **Policy Assignments** link below Save and make the assignments now.

f) Click **Preview Config**, and in the Preview dialog box, select one of the assigned devices.

The system generates a preview of the configuration CLI that will be sent to the device. Verify that the commands generated from the PTP FlexConfig object look correct. These will be shown at the end of the preview. Note that you will also see commands generated from other changes you have made to managed features. For the PTP commands, you should see something similar to the following:

```
###Flex-config Appended CLI ###
ptp mode e2etransparent
ptp domain 10
interface gigabitethernet1/1
 ptp enable
```

Step 4 Deploy your changes.

Because you assigned a FlexConfig policy to the devices, you will always get a deployment warning, which is meant to caution you about the use of FlexConfig. Click **Proceed** to continue with the deployment.

After the deployment completes, you can check the deployment history and view the transcript for the deployment. This is especially valuable if the deployment fails. See Verify the deployed configuration, on page 34.

Step 5 Verify the PTP configuration on each device.

From an SSH or Console session into each device, verify the PTP settings:

```
> show ptp clock
 PTP CLOCK INFO
  PTP Device Type: End to End Transparent Clock
  Operation mode: One Step
  Clock Identity: 34:62:88:FF:FE:1:73:81
  Clock Domain: 10
  Number of PTP ports: 4
> show ptp port
 PTP PORT DATASET: GigabitEthernet1/1
  Port identity: Clock Identity: 34:62:88:FF:FE:1:73:81
  Port identity: Port Number: 1
  PTP version: 2
  Port state: Enabled

 PTP PORT DATASET: GigabitEthernet1/2
  Port identity: Clock Identity: 34:62:88:FF:FE:1:73:81
  Port identity: Port Number: 2
  PTP version: 2
  Port state: Disabled

 PTP PORT DATASET: GigabitEthernet1/3
  Port identity: Clock Identity: 34:62:88:FF:FE:1:73:81
  Port identity: Port Number: 3
  PTP version: 2
  Port state: Disabled

 PTP PORT DATASET: GigabitEthernet1/4
  Port identity: Clock Identity: 34:62:88:FF:FE:1:73:81
  Port identity: Port Number: 4
  PTP version: 2
  Port state: Disabled
```

Configure automatic hardware bypass for power failure (ISA 3000)

Configure automatic hardware bypass to ensure network traffic continues to flow between interface pairs during power outages on ISA 3000 devices.

You can enable hardware bypass so that traffic continues to flow between an interface pair during a power outage. Supported interface pairs are copper interfaces GigabitEthernet 1/1 and 1/2; and GigabitEthernet 1/3 and 1/4. If you have a fiber Ethernet model, only the copper Ethernet pair (GigabitEthernet 1/1 and 1/2) supports hardware bypass.

When hardware bypass is active, traffic passes between these interface pairs at layer 1. The Firewall Threat Defense CLI will see the interfaces as being down. No firewall functions are in place, so make sure you understand the risks of allowing traffic to pass through the device.

In CLI Console or an SSH session, use the **show hardware-bypass** command to monitor the operational status.

Before you begin

For hardware bypass to work:

- You must place the interface pairs in the same bridge group.
- You must attach the interfaces to access ports on the switch. Do not attach them to trunk ports.

We recommend that you disable TCP sequence number randomization globally using the Threat Defense Service Policy attached to the access control policy assigned to the device. By default, the ISA 3000 rewrites the initial sequence number (ISN) of TCP connections passing through it to a random number. When hardware bypass is activated, the ISA 3000 is no longer in the data path and does not translate the sequence numbers. The receiving client receives an unexpected sequence number and drops the connection, so the TCP session needs to be re-established. Even with TCP sequence number randomization disabled, some TCP connections will have to be re-established because of the link that is temporarily down during the switchover.

Follow these steps to configure automatic hardware bypass for power failure:

Procedure

Step 1 Create the FlexConfig object to enable automatic bypass.


a. Choose **Objects** > **Object Management** > **FlexConfig** > **FlexConfig Object**.

b. Click **Add FlexConfig Object**, configure the following properties, and click **Save**.

- **Name**—The object name. For example, Enable_HW-Bypass.
- **Deployment**—Select **Everytime**. You want this configuration to be sent in every deployment to ensure it remains configured.
- **Type**—Keep the default, **Append**. The commands are sent to the device after the commands for directly-supported features.
- **Object body**—In the object body, type the commands needed to enable automatic hardware bypass. For example, the commands needed for both possible interface pairs:

```
hardware-bypass GigabitEthernet 1/1-1/2
hardware-bypass GigabitEthernet 1/3-1/4
```

The object body should look similar to the following:

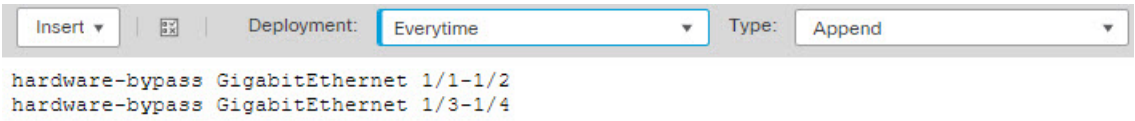

Step 2 Create the FlexConfig policy and assign it to the devices.


a. Choose **Devices** > **FlexConfig**.

b. Either click **New Policy**, or if an existing FlexConfig policy should be assigned to (or is already assigned to) the target devices, simply edit that policy.

When creating a new policy, assign the target devices to the policy in the dialog box where you name the policy.

c. Select the hardware bypass FlexConfig object in the **User Defined** folder in the table of contents and click > to add it to the policy.

The object should be added to the **Selected Appended FlexConfigs** list.

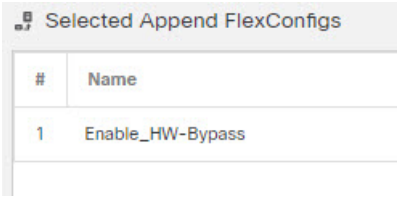

d. Click **Save**.

e. If you have not yet assigned all the targeted devices to the policy, click the **Policy Assignments** link below Save and make the assignments now.

f. Click **Preview Config**, and in the Preview dialog box, select one of the assigned devices.

The system generates a preview of the configuration CLI that will be sent to the device. Verify that the commands generated from the hardware bypass FlexConfig object look correct. These will be shown at the end of the preview. Note that you will also see commands generated from other changes you have made to managed features. For the hardware bypass commands, you should see something similar to the following:

```
###Flex-config Appended CLI ###
hardware-bypass GigabitEthernet 1/1-1/2
hardware-bypass GigabitEthernet 1/3-1/4
```

Step 3 Deploy your changes.

Because you assigned a FlexConfig policy to the devices, you will always get a deployment warning, which is meant to caution you about the use of FlexConfig. Click **Proceed** to continue with the deployment.

After the deployment completes, you can check the deployment history and view the transcript for the deployment. This is especially valuable if the deployment fails. See Verify the deployed configuration, on page 34.

What to do next

If you want to manually invoke hardware bypass or manually turn it off, you need to create two FlexConfig objects:

- One that manually starts bypass, which would contain one or both of the following commands, depending on whether you want to invoke bypass for both pairs:

```
hardware-bypass manual GigabitEthernet 1/1-1/2
hardware-bypass manual GigabitEthernet 1/3-1/4
```

- One that manually turns off bypass, which would contain one or both of the following commands:

```
no hardware-bypass manual GigabitEthernet 1/1-1/2
no hardware-bypass manual GigabitEthernet 1/3-1/4
```

You would then need to add one or the other object to the FlexConfig policy, and deploy changes, to either turn bypass on or off. You would also need to immediately remove the object from the FlexConfig policy after deployment. If you manually invoke bypass, you would then need to repeat the process to turn it off again. Thus, using this manual method requires frequent and careful editing of the FlexConfig policy and additional deployments.

Migrate FlexConfig policies

This task migrates ECMP, VXLAN, and EIGRP policies from FlexConfig objects to the management center UI to enable direct policy management.

Attention This section on migrating FlexConfig policies is applicable only for migrating ECMP, VXLAN, and EIGRP policies.

The ECMP, VXLAN, and EIGRP policies were configured using the FlexConfig objects and policies in earlier versions of the Firewall Management Center. You can now directly configure these policies in the management center UI. When you are upgrading the management center from earlier versions, the FlexConfig configuration is retained. However, to manage the policies from the UI, you must redo the configuration in the corresponding **Device (Edit)** > **Routing** page and remove the configuration from FlexConfig. To automate creation of the policies in the UI, Firewall Management Center provides an option to migrate the policies from FlexConfig to the UI. However, it does not remove the migrated policies from the FlexConfig. For post-migration procedure, refer to Step 7, on page 45.

Before you begin

- Ensure that the deployed FlexConfig policy is up-to-date and not out-of-date. The migration option will be available only if the policy is up-to-date on at least 1 device. Migration does not take place for those devices that have out-of-date policies.
- If the policy is configured in both FlexConfig and the management center:
  - Migration will not be initiated if the policy is already configured at **Device (Edit)** > **Routing**.
  - During deployment, the management center displays an error message. Example EIGRP migration error message—*EIGRP is configured through FlexConfig object and also under Device Listing*

->Routing EIGRP for the device. Maintain the EIGRP configuration in either Routing EIGRP or FlexConfig.

- If the network objects used in the policy exist in the management center, during migration, they are reused. During migration, when a network object that is matching the IP configuration is not available, a new network object is created as *bb* appended with a timestamp and integer, like ***bb_<timestamp>_<integer>***. For more than one such network object, the integer variable in the name would be incremented by one.

Follow these steps to migrate FlexConfig policies:

Procedure

Step 1 Choose **Devices** > **FlexConfig**, click **Edit** (✎) against the FlexConfig policy that you want to migrate.

Step 2 Click **Migrate Config**.

Note
Once migration starts, both **Migrate Config** and FlexConfig **Edit** options are not available.

The **Migrate Config** option is not available, when:

- There are no applicable FlexConfig CLIs to be migrated.
- The FlexConfig policy is not associated with any FlexConfig objects.
- There are no devices that are associated with the FlexConfig policy.

Step 3 In the **Migrate Flex Configuration** dialog box, select the device to which you wish to migrate the configuration, and then click **Ok**.

The migration progress is displayed as task notification. When the migration is complete, click the *View Details* link and download the migration report (PDF format).

Step 4 To view the policy changes, choose **System** (⚙) > **Monitoring** > **Audit** and click on the *Flex Config Migration* message.

Step 5 To view the FlexConfig migration report, choose **System** (⚙) > **Monitoring** > **Audit** and click on the *Flex Config Migration* message. To view the complete migration report, click the **Report** icon.

Step 6 Verify the migrated configuration settings in the corresponding **Device (Edit)** > **Routing**. page.

Step 7 To remove the specific policy config from FlexConfig for the device, in the management center, do the following:

a) Identify the migrated FlexConfig policy for the device.
b) Use the copy option and create duplicate of the FlexConfig policy.
c) Remove the corresponding CLI objects from the duplicated FlexConfig policy.
d) Associate the device to the duplicated FlexConfig policy.

Step 8 Save and deploy the configuration.

History for FlexConfig

This reference provides a summary of feature changes by release for the FlexConfig policy.

Feature	Minimum Firewall Management Center	Minimum Firewall Threat Defense	Details
Quick recovery after data plane failure for the Firepower 1000/2100 and Firepower 4100/9300.	7.4.1	7.4.1	If the data plane process crashes, the system now reloads only the data plane process instead of rebooting the device. Along with the data plane process reload, Snort and a few other processes also get reloaded. However, if the data plane process crashes during bootup, the device follows the normal reload/reboot sequence, which helps avoid a reload process loop from occurring. This feature is enabled by default for both new and upgraded devices. New/modified CLI commands: **data-plane quick-reload**, **no data-plane quick-reload**, **show data-plane quick-reload status** Supported platforms: Firepower 1000/2100, Firepower 4100/9300 Platform restrictions: Not supported in multi-instance mode. See: *Cisco Secure Firewall Threat Defense Command Reference* and Cisco Secure Firewall ASA Series Command Reference.
Migration tool support.	7.3.0	Any	Support to migrate Flex configured ECMP, VXLAN, and EIGRP policies to management center was introduced. New/modified screens: **Devices** > **FlexConfig** > **Migrate FlexConfig**
Removal of BFD configuration in FlexConfig.	7.3.0	Any	Support to configure BFD policies directly in the management center user interface was introduced. Hence, FlexConfig support to configure BFD policies was removed.
Removal of priority-queue.	7.2.5	7.2.5	Support to configure priority-queue in threat defense was removed.
Removal of EIGRP configuration in FlexConfig.	7.2.0	Any	Support to configure EIGRP directly in the management center user interface was introduced. Hence, FlexConfig support to configure EIGRP policies was removed.
Removal of PBR configuration.	7.1.0	7.1.0	Support to configure the PBR directly in the FMC user interface was introduced. Hence, FlexConfig support to configure PBR for FTD 7.1 and higher was removed. New/modified commands: **policy-route route-map***routemap-object-name*.
Removal of ECMP zone creation support in FlexConfig.	7.1.0	Any	Support to configure the ECMP zones directly in the FMC user interface was introduced. Hence, FlexConfig support to configure ECMP zones was removed.

Feature	Minimum Firewall Management Center	Minimum Firewall Threat Defense	Details
Precision Time Protocol (PTP) configuration for ISA 3000 devices.	6.5.0	Any	You can use FlexConfig to configure the Precision Time Protocol (PTP) on ISA 3000 devices. PTP is a time-synchronization protocol developed to synchronize the clocks of various devices in a packet-based network. The protocol is designed specifically for industrial, networked measurement and control systems. We now allow you to include the **PTP** (interface mode) command, and the global commands **PTP mode e2etransparent** and **PTP domain**, in FlexConfig objects. New/modified commands: **show PTP**.
Deprecated FlexConfig objects.	6.3.0	Any	Several features that in previous releases you configured using FlexConfig are now directly supported in FMC. You need to remove these FlexConfig objects if you are using them, and convert your configuration to use the new objects. These are the deprecated FlexConfig objects and text objects. • **Default_DNS_Configure**, including the defaultDNSNameServerList and defaultDNSParameters text objects. Now, please configure DNS for the data interfaces using the Platform Settings policy. • **TCP_Embryonic_Conn_Limit**, and the tcp_conn_misc and tcp_conn_limit text objects. Configure these features in the FTD Service Policy, which you can find on the Advanced tab of the access control policy assigned to the device. • **TCP_Embryonic_Conn_Timeout**, and the tcp_conn_misc and tcp_conn_timeout text objects. Configure these features in the FTD Service Policy.

Feature	Minimum Firewall Management Center	Minimum Firewall Threat Defense	Details
FlexConfig updates.	6.2.1	Any	As per the Government Certification requirements, all sensitive information like password, shared keys in system-provided or user-defined FlexConfig object should be masked using secret key variables. After you update the FMC to Version 6.2.1+, all sensitive information in FlexConfig Objects are converted to secret key variable format. In addition, these new FlexConfig templates are added: • **Default_DNS_Configure** template allows you to the default DNS group, which is used to resolve hostnames for commands or features that resolve names through the data interfaces. • **TCP Embryonic connection limit and timeout configuration** template allows you to configure embryonic connection limits/timeout CLIs to protect from SYN Flood DoSAttack. • **Turn on threat detection configure and clear** templates allow you to configure threat detection statistics for attacks intercepted by TCP Intercept. • **IPV6 router header inspection** template allows you to configure of IPV6 inspection header for selectively allow/block certain headers with different types (e.g. allowing RH Type 2,mobile). • **DHCPv6 prefix delegation** template allows you to configure one outside (PD client) and one inside interface (recipient of delegated prefix) for IPv6 prefix delegation.
FlexConfig.	6.2.0	Any	The FlexConfig feature allows you use the FMC to deploy ASA CLI template-based functionality to FTD devices. This feature allows you to enable some of the most valuable ASA functions that are not currently available on FTD devices. This functionality is structured as templates and objects that work together in a policy. The default templates are officially supported by Cisco TAC. New/modified screens: • **Devices** > **FlexConfig** • **Objects** > **Object Management** > **FlexConfig** > **FlexConfig Objects** • **Objects** > **Object Management** > **FlexConfig** > **Text Object**